Recorded at Register of Deeds 4-21-77 Index No. T12 BOOK P60

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 16, Township 104N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 9-3-75 (DATE) placed a MINNESOTA HIGHWAY DEPARTMENT CAST IRON MONUMENT DOWN ½ INCH.

SKETCH OF REFERENCE TIES

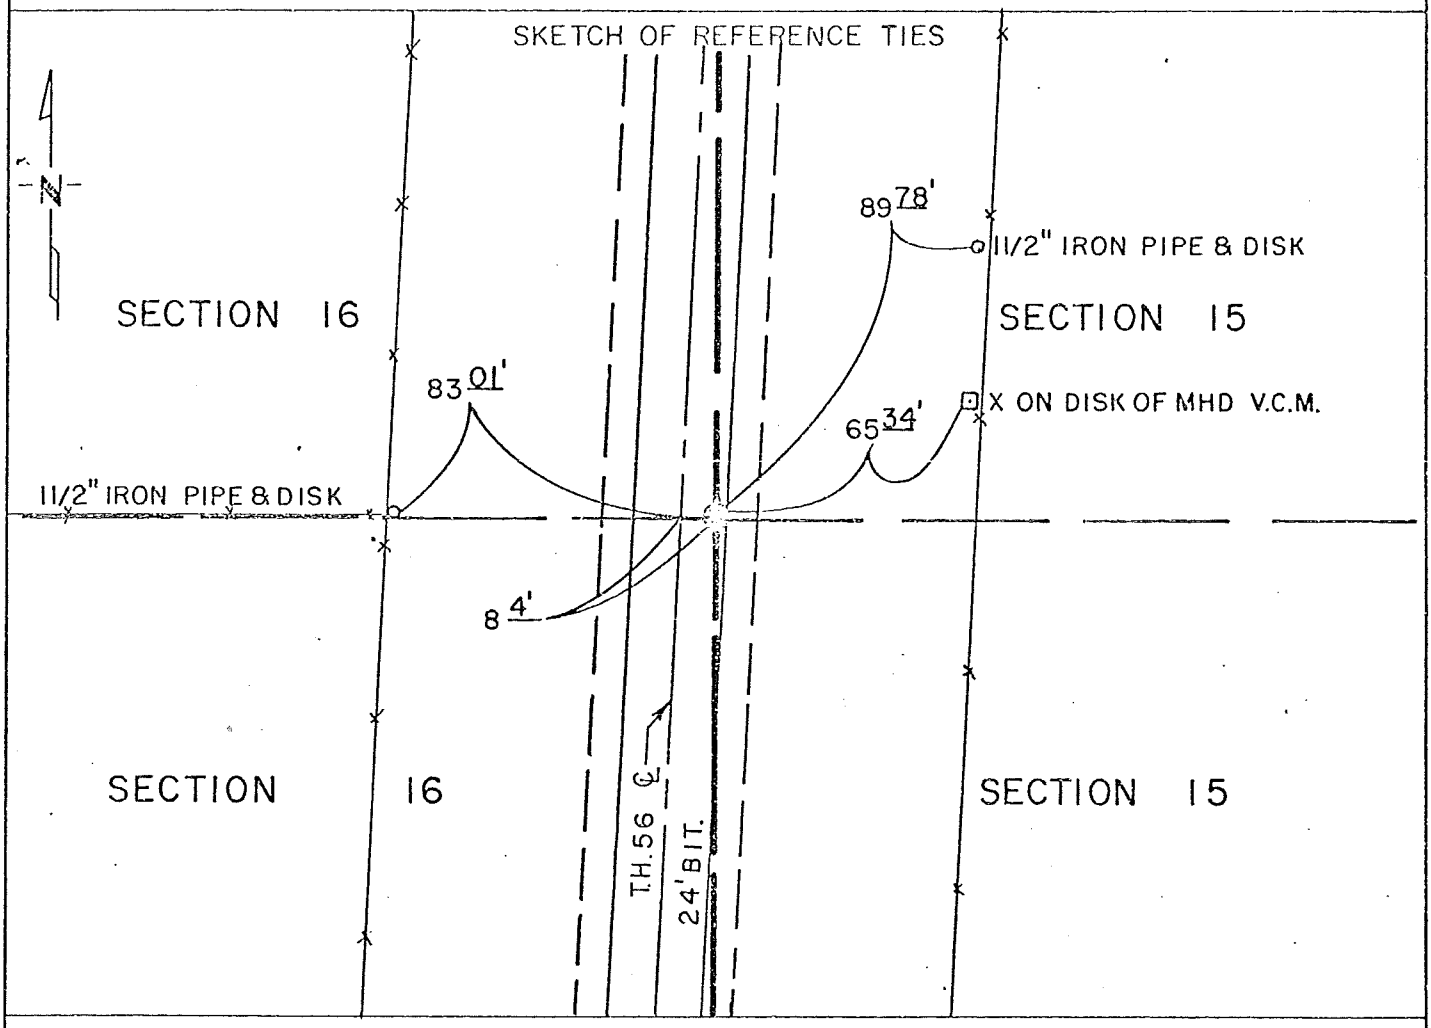

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald R Rukuding 9/8/75
(SIGNATURE) (DATE)

Registration No. 10162

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE REGISTER OF DEEDS
County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____ .M. on the _____ day of _____ A.D., 19 ___

Register of Deeds _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

Statement of Evidence:

EAST QUARTER CORNER, SECTION 16, TOWNSHIP 104N, RANGE 17W, 5th P.M.

November 1853 — John Fitzpatrick, Deputy Surveyor, set post, made a mound of earth and sod with trench and pits and deposited stone for the corner during the Original Public Land Survey.

July 1929 — C. Aasland, Minnesota Highway Department Engineer, found a stone 8.4 feet east of POT 1287+96 for the corner.

1975 — Minnesota Highway Department placed a cast iron monument for the corner 1/2 inch below the surface, 8.4 feet east of POT 1287+96.0.

An analysis of the record and survey data indicates that the stone found in 1929 fits the occupation lines. This position is accepted as a perpetuation of the Public Land Survey Corner.

For details of the survey data, contact the Minnesota Highway Department's District Surveying and Mapping Section, Rochester.