"D" p60, "C" p132

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 16, Township 104N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 9-25-89 (DATE) found a 1/2" Ø IRON CAST IN 6" DIA. CONC. MONUMENT.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 9-25-89 (DATE) placed a 5/8" Ø IRON CAPPED RLS 13807 OVER CONC. MONUMENT ON ROAD SURFACE.

SKETCH OF REFERENCE TIES

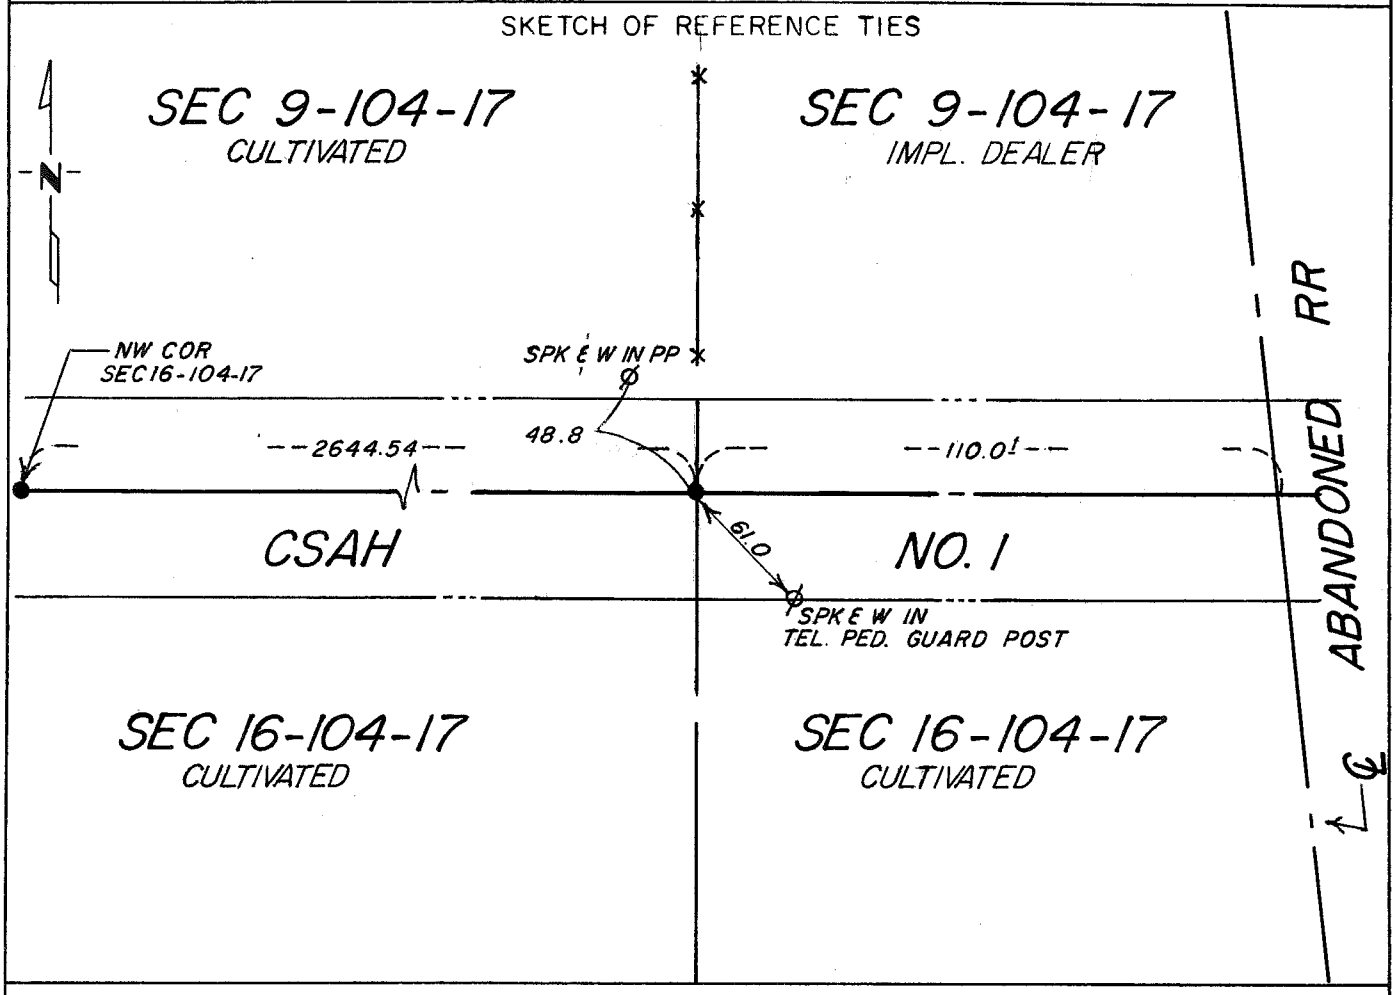

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] 12-21-89
SIGNATURE DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Section 16-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the United States General Land Office in 1854. The government notes show a wood post was set and a field stone was deposited with a mound of earth and trenches.

The following were contacted for section corner information:

Mower County Highway Department
Mower County Records Office

1930+ Mower County grading plan shows a concrete monument inplace and ties taken during construction project.

1989 Jones, Haugh & Smith Inc. crew together with the Mower County backhoe operator dug a 6'x6'x3' deep hole on the centerline of E-W road in line with fence west and uncovered a 1/2 diameter iron cast in a 6" diameter concrete monument 2.5' below road surface. Placed a 5/8" diameter x 16" iron rebar capped RLS 13807 over concrete monument on road surface.

The monument found fits occupation and road centerlines within the section and is accepted as the original public land survey corner or a perpetuation thereof.

For electronic survey data and analysis, contact firm of Jones, Haugh & Smith.