Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 13 Township 104 Range 18W 5th P.M.

STATE OF MINNESOTA. County of MOWER


At the corner location shown on the sketch:

☒ On 4-19-1995 (DATE) found a 24"LONG GRANITE STONE WITH A 6"X6" SHAPED TOP

____ left monument as found ____ lowered monument X removed monument

☒ On 4-19-1995 (DATE) placed a 24" TELSPAR WITH CAST IRON CAP AT SAME LOCATION AS FOUND STONE

SKETCH OF REFERENCE TIES

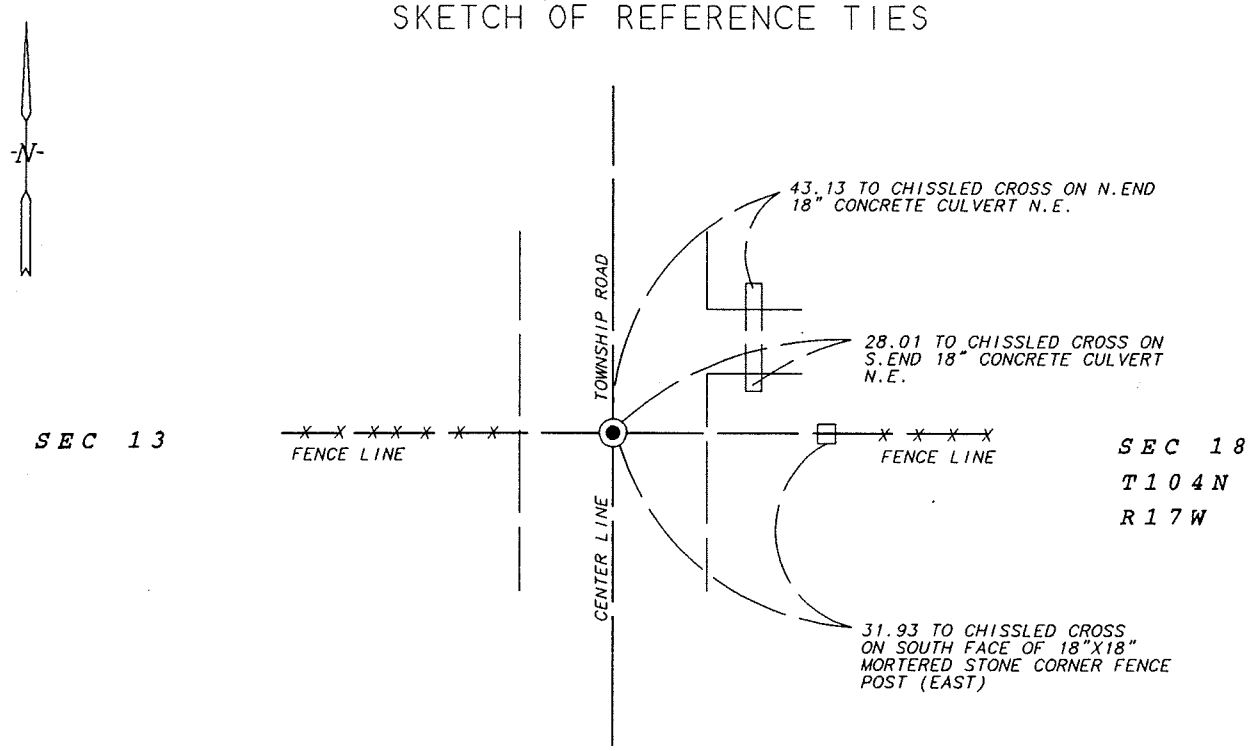

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Vincent A. Fangman
Licensed Land Surveyor
Minnesota Registration No. 14888

4/19/1995
Date.

FANGMAN LAND SURVEYING Pine Islands MINNESOTA

OFFICE OF THE COUNTY RECORDER
County of MOWER

I herby certify that this document was filed in Co. Recorder's office at _____ .M. on the _____ day of _____ A.D. 19

County Recorder _____

By _____ .Deputy

DOCUMENT NO. _____

Statement of Evidence:

East Quarter Corner Section 13, T104N, R18W

April 19, 1995 Vince Fangman, private land surveyor, dug with backhoe at the center of the north-south road and in line with fences east and west. A large granite stone was found 2 feet below the road surface. The stone was layed on its side and moved slightly southeast of its true position to make room for the permanent metal monument. The distance to the northeast corner is 2651.98 and the distance to the occupation at the southeast corner of section 13 is approximately 2655. This corner is being accepted as the public land survey corner.