Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 20, Township 101N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 7-29-92 (DATE) found a NO EVIDENCE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 7-29-92 (DATE) placed a Cast iron monument

SKETCH OF REFERENCE TIES

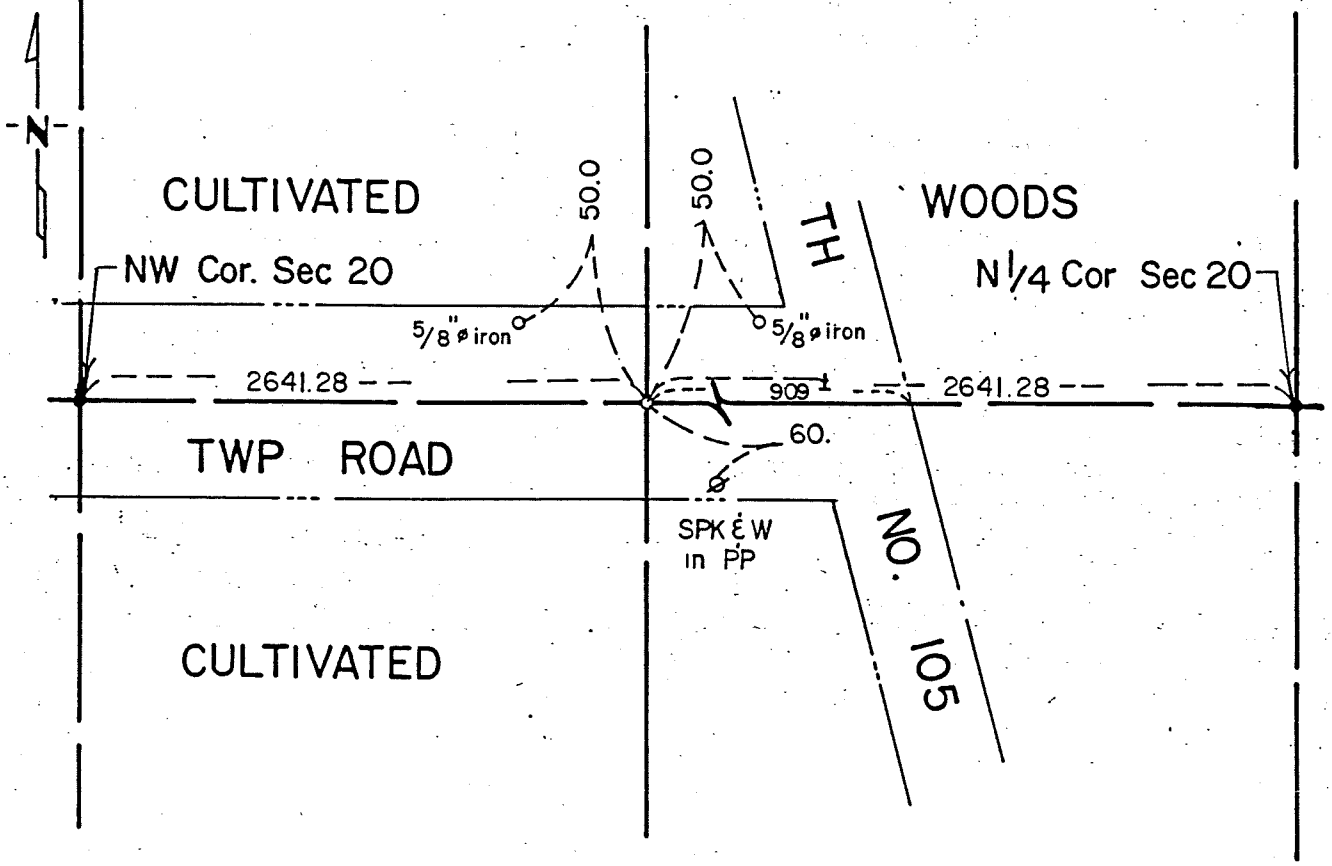

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-23-92

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Sec 20-101-18

This corner was original established by Deputy Surveyor Wm. I. Anderson of the US General Land Office in 1854. The government notes show a wood post was set and a mound of earth was raised.

The following were contacted for section corner information:
Mower County Engineering Dept
Mower County Recorder's Office
Minnesota Department of Natural Resources
Minnesota Department of Transportation
Yaggy, Colby & Associates

1964 Minnesota Department of Natural Resources used centerline of road and fence intersection for this position.

1992 Jones, Haugh & Smith Inc personnel under the direction of John Schulte IV, dug with the Mower County backhoe on centerline of existing township road at a temporary position at the mid-point between the northwest and northeast corner of Section 20 using chaining notes obtained from Minnesota Department of Natural Resources. A 6'x20'x4' deep hole was dug and no evidence was found. Therefore we established position of corner at the midpoint between section corners on the centerline of east-west road and set a cast iron monument.

This position fits existing occupation lines within the section and is the best evidence of the original location.