CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

P 42 "B"

NORTHWEST Corner of Section 31, Township 101 N, Range 17 W, 5 P.M.

STATE OF MINNESOTA, County of MOWER


the corner location shown on the sketch:

On _____ found A 7"N-S X 4" E-W X 8" HIGH CHIPPED LIMESTONE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

On 9-28-89 placed CTY. MON. OVER LIMESTONE

SKETCH OF REFERENCE TIES

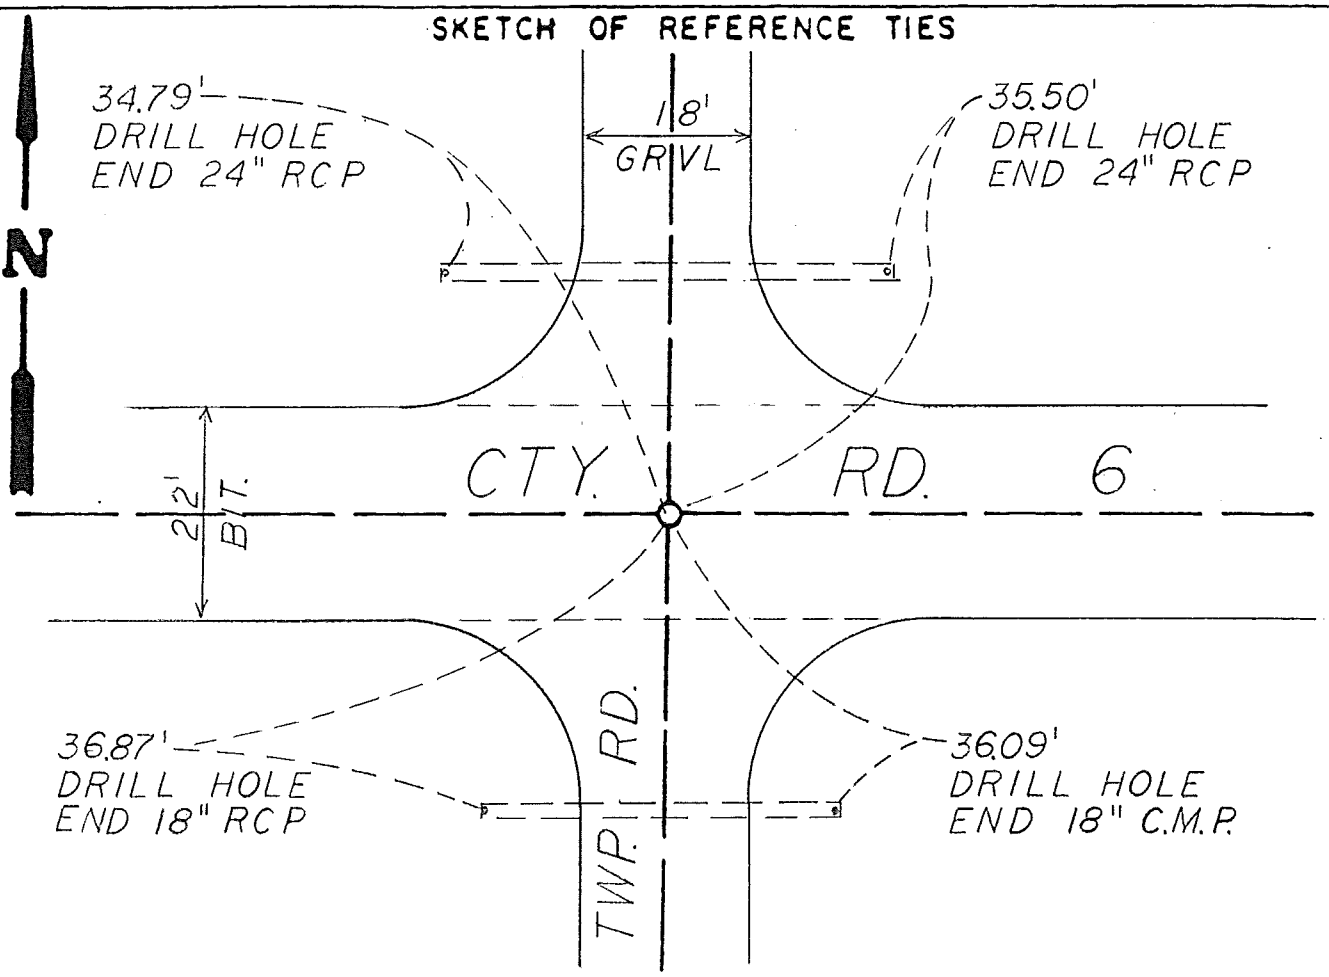

Statement of evidence relative to this corner location is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald J. Olson — Signature
1-30-90 — Date

Registration No. 11009

☒ Land Surveyor ☐ Prof. Engineer
☐ County Surveyor ☐ County Engineer

Zenk•Read•Trygstad & ASSOCIATES, INC.
Engineers / Architects / Land Surveyors / Planners
Box 689, Albert Lea, MN 56007 507/373-0689

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____.M. on the _____ day of _____ A.D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

NORTHWEST CORNER SECTION 31, TOWNSHIP 101 NORTH, RANGE 17 WEST, 5TH P.M.

August, 1853 — Elisha Norris, Deputy Surveyor, set post for corner and built a mound with trench per instructions. Drove a charred stake in center and planted Osage Orange seed in SE corner, during the original Public Land Survey.

1930 — Mower County Engineer's Plans for County Aid Job C3 show ties to the Sec. cor. No monument was shown.

1950 — Mower County Engineer's Plans for the County Road show new ties to the Sec. Cor. No Monument was shown.

Sept. 28, 1989 — Ronald J. Olson, RLS 11009, excavated with a backhoe 6 feet E-W by 4 feet N-S by 4 feet deep to natural ground centered at the intersection of the roads and found a 7inch N-S by 4inch E-W by 8 inch high chipped Limestone 3.5 feet below the surface in blue clay surrounded by black mottled soil. The stone was found 1 foot south of the center of the intersection. A 2 inch by 9 inch high wood stake and a 1/2 inch rod with a hub were found over the limestone. A spike & washer was found at the surface 0.6 foot easterly of the limestone. A 1 inch by 12 inch rebar was placed on the east side of the Limestone before back filling.

An analysis of the record data gives no indication of the origin of the stone. The limestone was used by early surveyors to mark other corners in the area and it agrees with the lines of occupation. The location of the stone has also been maintained by the County since 1930. The stone is accepted as marking the location of the original Public Land Survey Corner.

For details of the analysis contact Zenk Read Trygstad Inc., Albert Lea, Minnesota.