Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 27, Township 104N, Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 6-4-90 (DATE) found a 5"x8"x12" pointed field stone over a nest of stones 2.5' below road surface in virgin soil.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6-4-90 (DATE) placed a 5/8"Ø iron on the south side of stone found.

SKETCH OF REFERENCE TIES

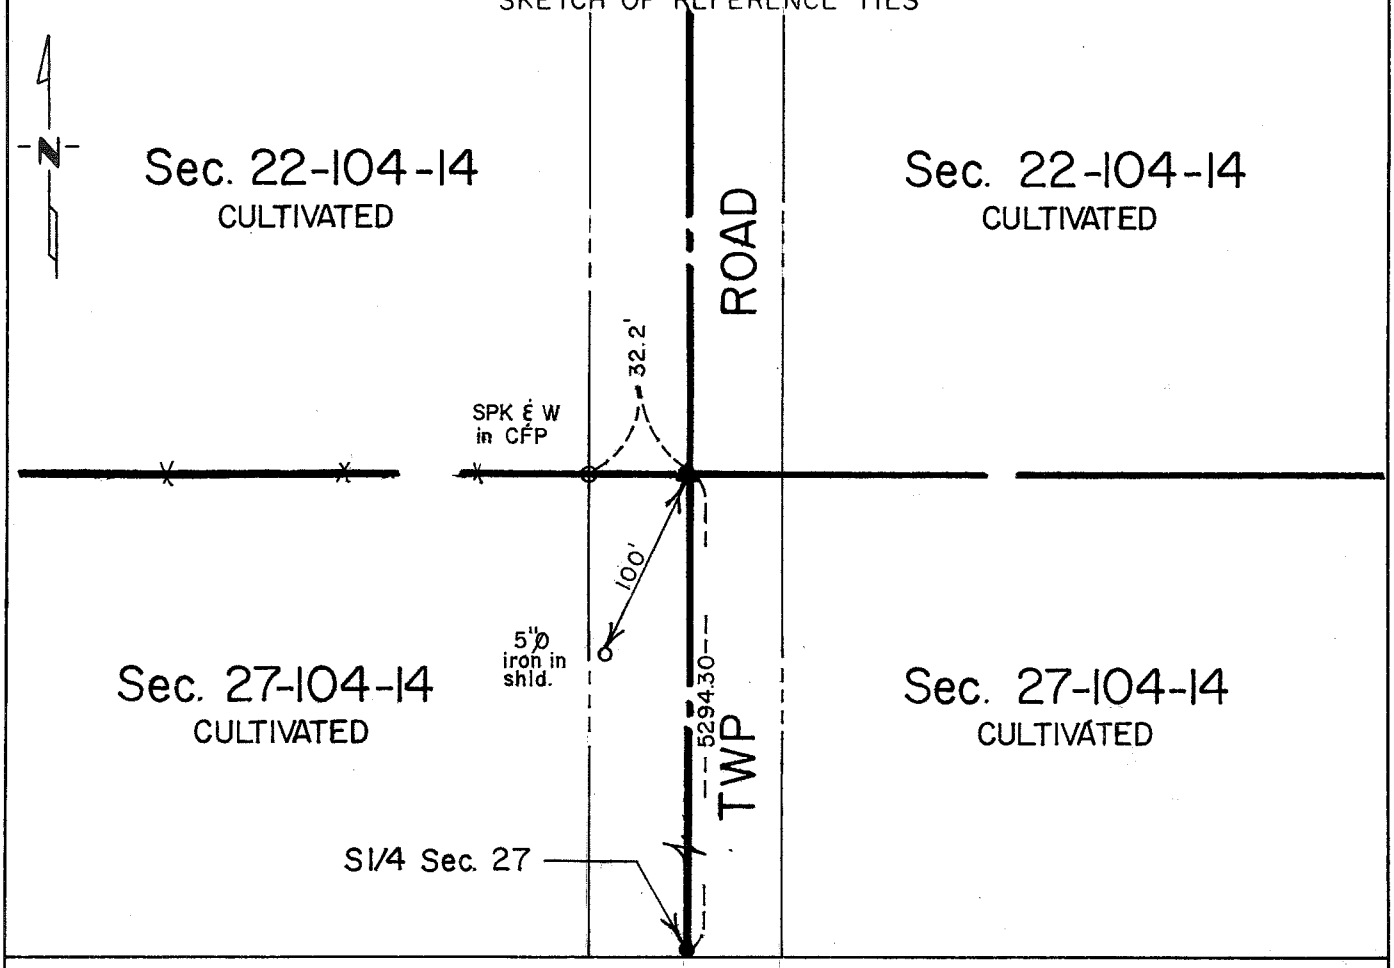

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-17-90

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Section 27-104-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Survey Office in 1853. The government notes show this corner was marked with a wood post and a trench and a mound of earth.

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorder's Office

1990 Jones, Haugh & Smith crew together with the Mower County backhoe dug on centerline of north-south road in line with fence west and uncovered a 5"x8"x12" pointed field stone over a nest of stones 2.5' deep in virgin soil. Placed a 5/8" diameter iron capped 13807 on the south side of a pointed field stone.

Corner found fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 27, Township 104N, Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 6-4-90 (DATE) found a no evidence

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6-4-90 (DATE) placed a 5/8"Ø iron capped (13807) on a straight line between SW & SE corners and in line with fence South.

SKETCH OF REFERENCE TIES

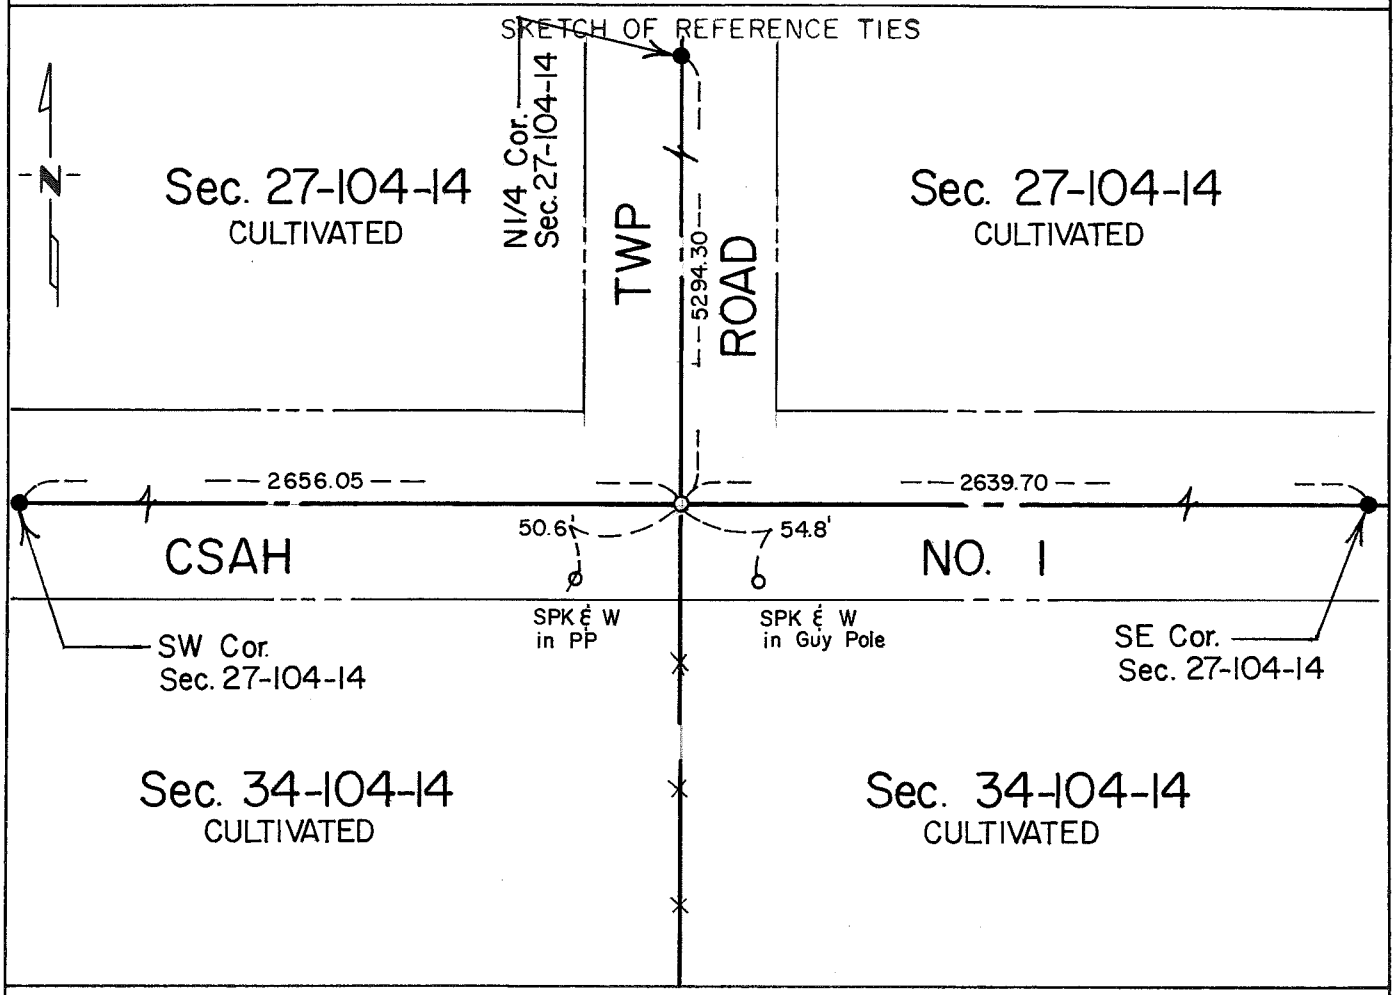

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-17-90

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

S 1/4 corner Section 27-104-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Survey Office in 1853. The government notes show this corner was marked with a wood post and a trench and a mound of earth.

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorder's Office

1990 Jones, Haugh & Smith crew together with the Mower County backhoe dug 4'x8'x5' deep hole in virgin soil and found no evidence or perpetuation of the public land survey corner. Placed a 5/8" diameter iron capped (13807) on a straight line between Southwest and Southeast section corners in line with the fence south.

This location fits occupation and road centerlines and is accepted as best evidence of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.