Index No. "M" p106

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 30, Township 102N, Range 15W, 5th P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☐ On 6/30/89 (DATE) found a 1 1/2" dia iron.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6/30/89 (DATE) placed a 5/8" Ø x 16" iron capped RLS 13807.

SKETCH OF REFERENCE TIES

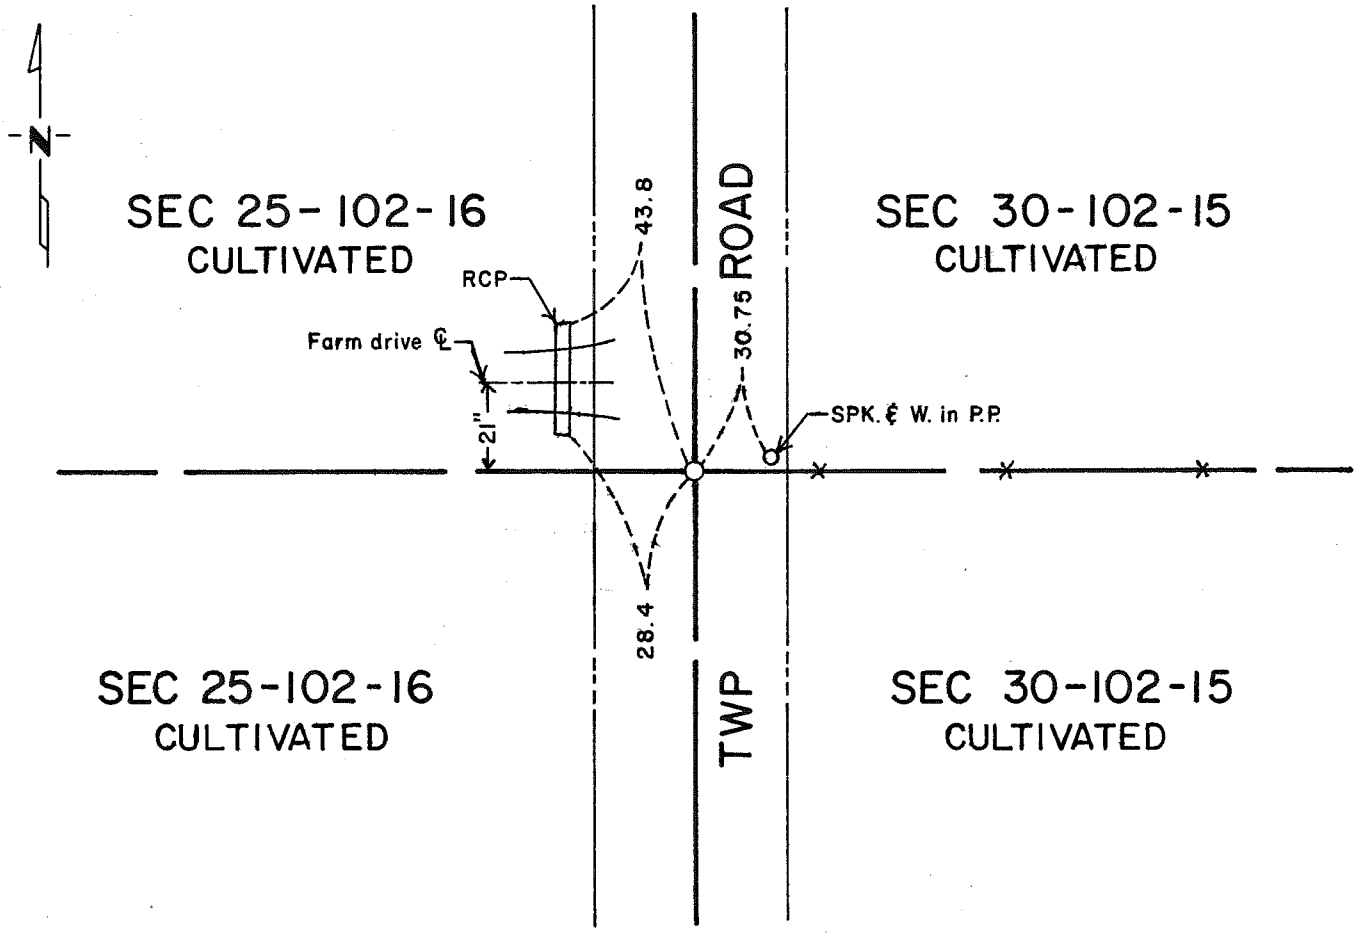

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] 7-25-89
SIGNATURE DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE
W 1/4 corner Sec 30-102-15

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set in a mound of earth with a trench and a hand full of small stones were deposited around post.

In 1989 Jones, Haugh & Smith Inc contacted the following for section corner information:

Mower County Engineering Department
Private records of Jones, Haugh & Smith Inc

No records of this corner were found to support evidence of a perpetuation of the original public land survey corner.

In June 1989 Jones, Haugh & Smith Inc personnel together with the Mower County backhoe, dug on the centerline of north-south roads in line with fence east and uncovered a 1 1/2" diameter iron 3.5 feet below road surface in virgin soil. Found no further evidence of public land survey corner or a perpetuation thereof. Placed a 5/8" diameter x 16" iron on road surface.

The monument found fits occupation and road centerline and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. "L" p106

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 30, Township 102N, Range 15W, 5th P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☐ On 6/30/89 (DATE) found a 2" dia. x 28" wood post.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6/30/89 (DATE) placed a 5/8" dia iron capped RLS 13807 over post on road surface.

SKETCH OF REFERENCE TIES

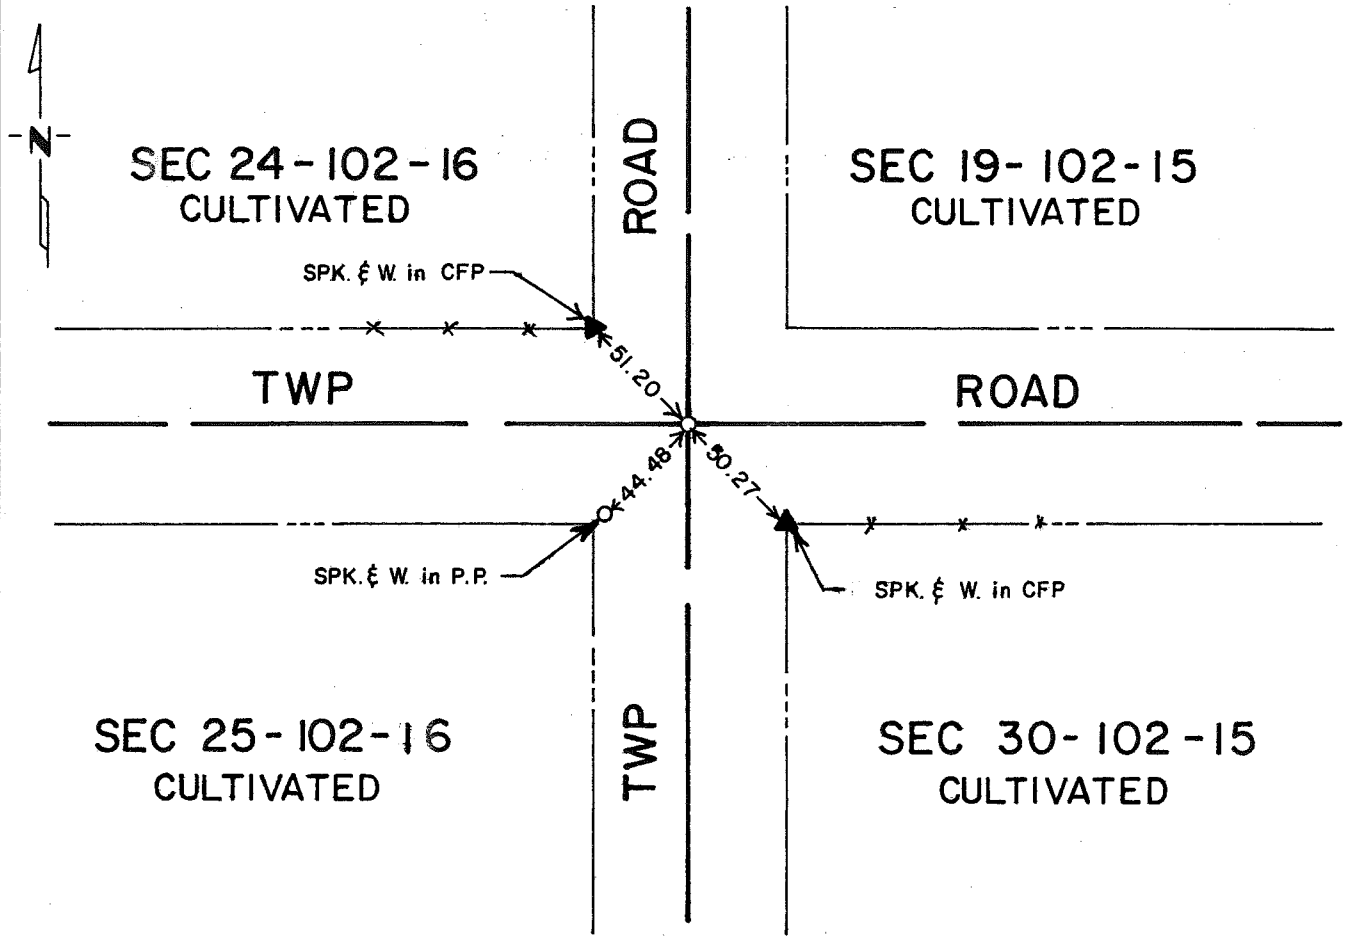

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 7-25-89 DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE
NW corner Sec 30-102-15

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set in a mound of earth with a trench.

In 1989 Jones, Haugh & Smith Inc contacted the following for section corner information:

Mower County Engineering Department
Private records of Jones, Haugh & Smith Inc

No records of this corner were found to support evidence of a perpetuation of the original public land survey corner.

In June 1989 Jones, Haugh & Smith Inc personnel together with the Mower County backhoe, dug on the centerline centerline of north-south-east-west roads and at a depth of 2.5 feet below road surface in virgin soil uncovered a 2" diameter x 28" long charred wood post. Left post as found and placed a 5/8" diameter x 16" long iron over wood post on road surface.

The monument found fits occupation and centerlines within the section and is accepted as the original public land survey corner or a perpetuation thereof.