Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 30, Township 102N Range 15W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/09/99 (DATE) found a LARGE ROCK

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/09/99 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

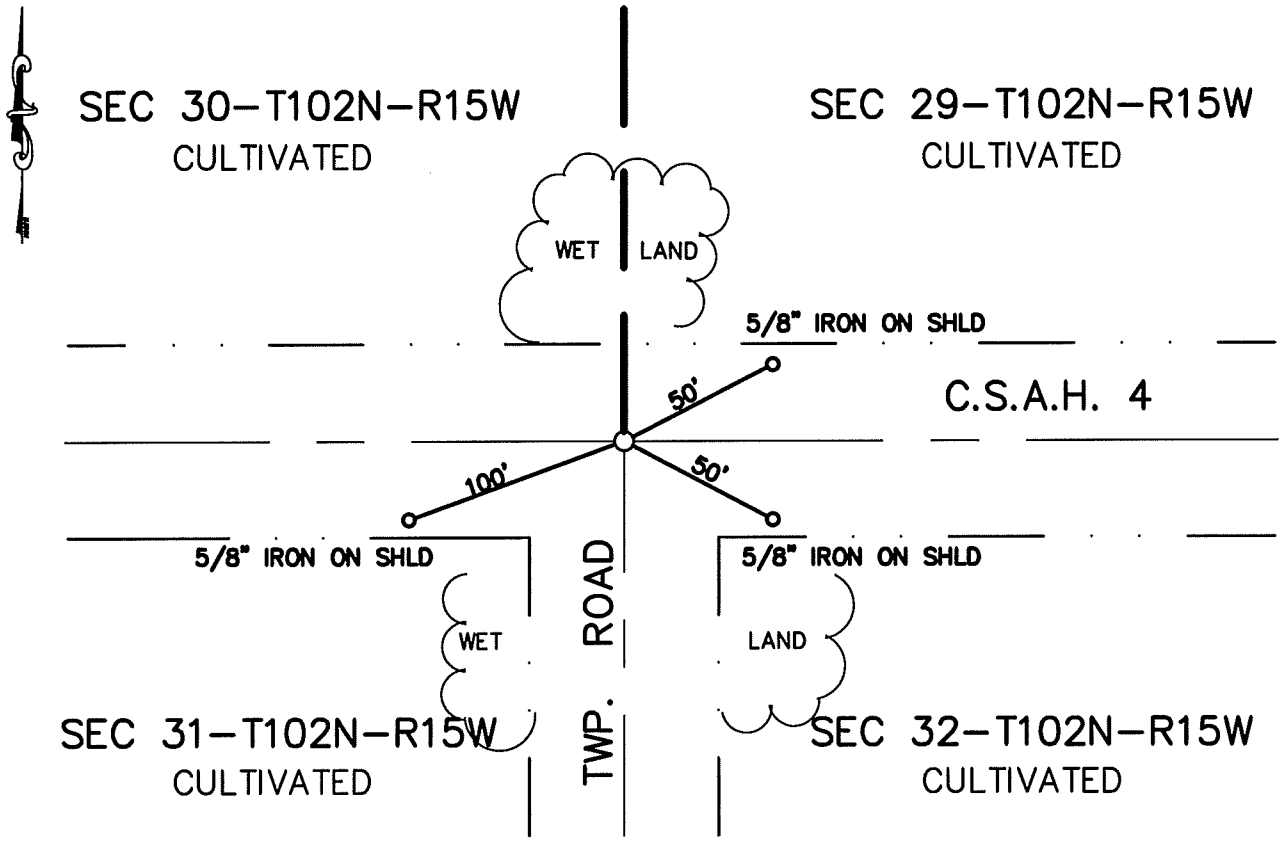

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ 8-10 99
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

SE Cor Sec 30-102-15

This corner was originally established by Deputy Surveyor Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1999 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the centerline of C.S.A.H. No.4 and the centerline of township road south. Uncovered a large rock 3.5' deep. Continued digging and found no other evidence of the original PLS corner. Placed a capped 5/8" iron #13807 on the east side of rock found. Placed a cast iron monument above rock at road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh, and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 30, Township 102N Range 15W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/09/99 (DATE) found a LARGE SPIKE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/09/99 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

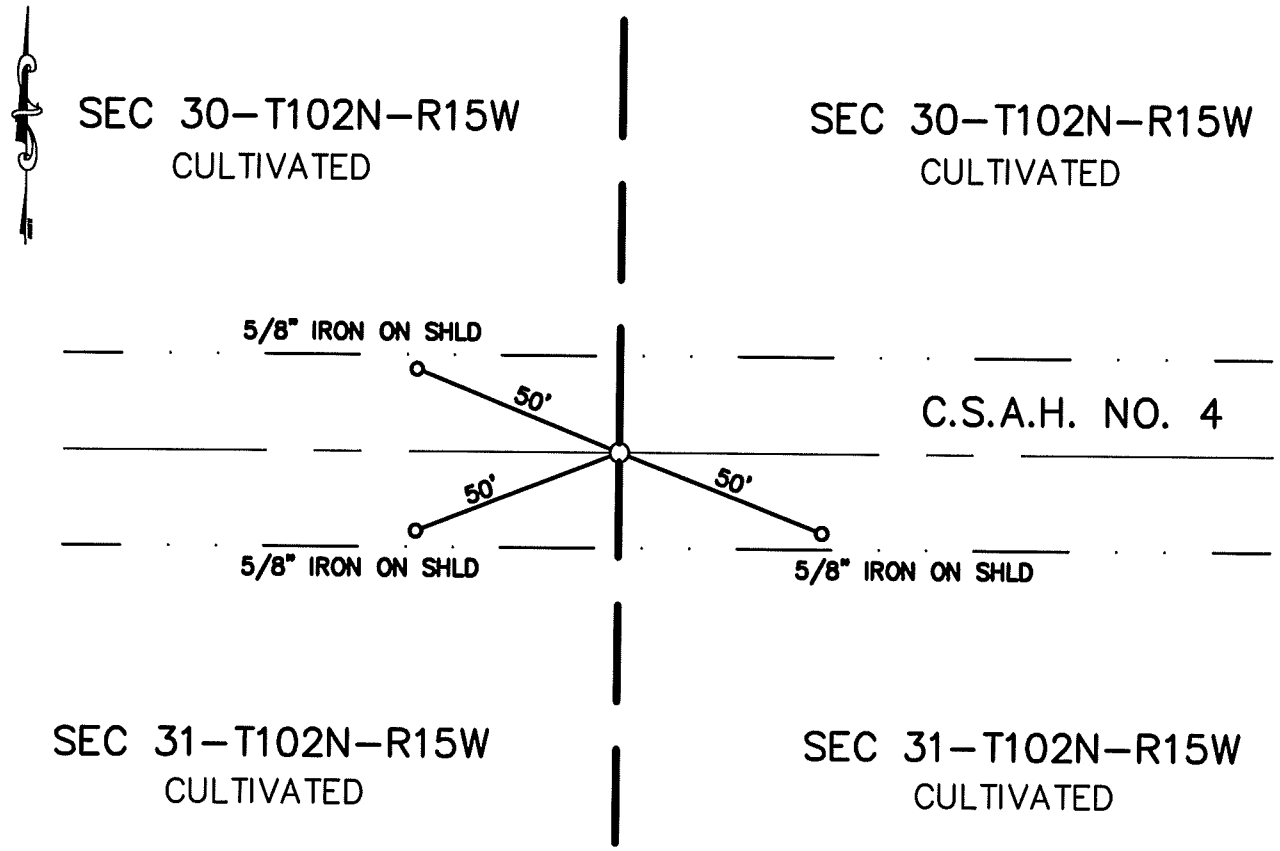

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 8-10-99 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

S 1/4 Cor Sec 30-102-15

This corner was originally established by Deputy Surveyor Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1999 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the centerline of C.S.A.H. No. 4 E-W and in line with line fence N-S. Located a large spike at road surface. Continued digging and found no other evidence of the original PLS corner. Placed a cast iron monument at road surface inplace of spike found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh, and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 34, Township 102N, Range 15W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 4-25-91 (DATE) found a harrison monument over a concrete monument w/1/2"Ø iron cast in center over 3 vertical stones on ℄ ℄ of N-S-E-W roads.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 4-25-91 (DATE) placed a cast iron monument over concrete monument found

SKETCH OF REFERENCE TIES

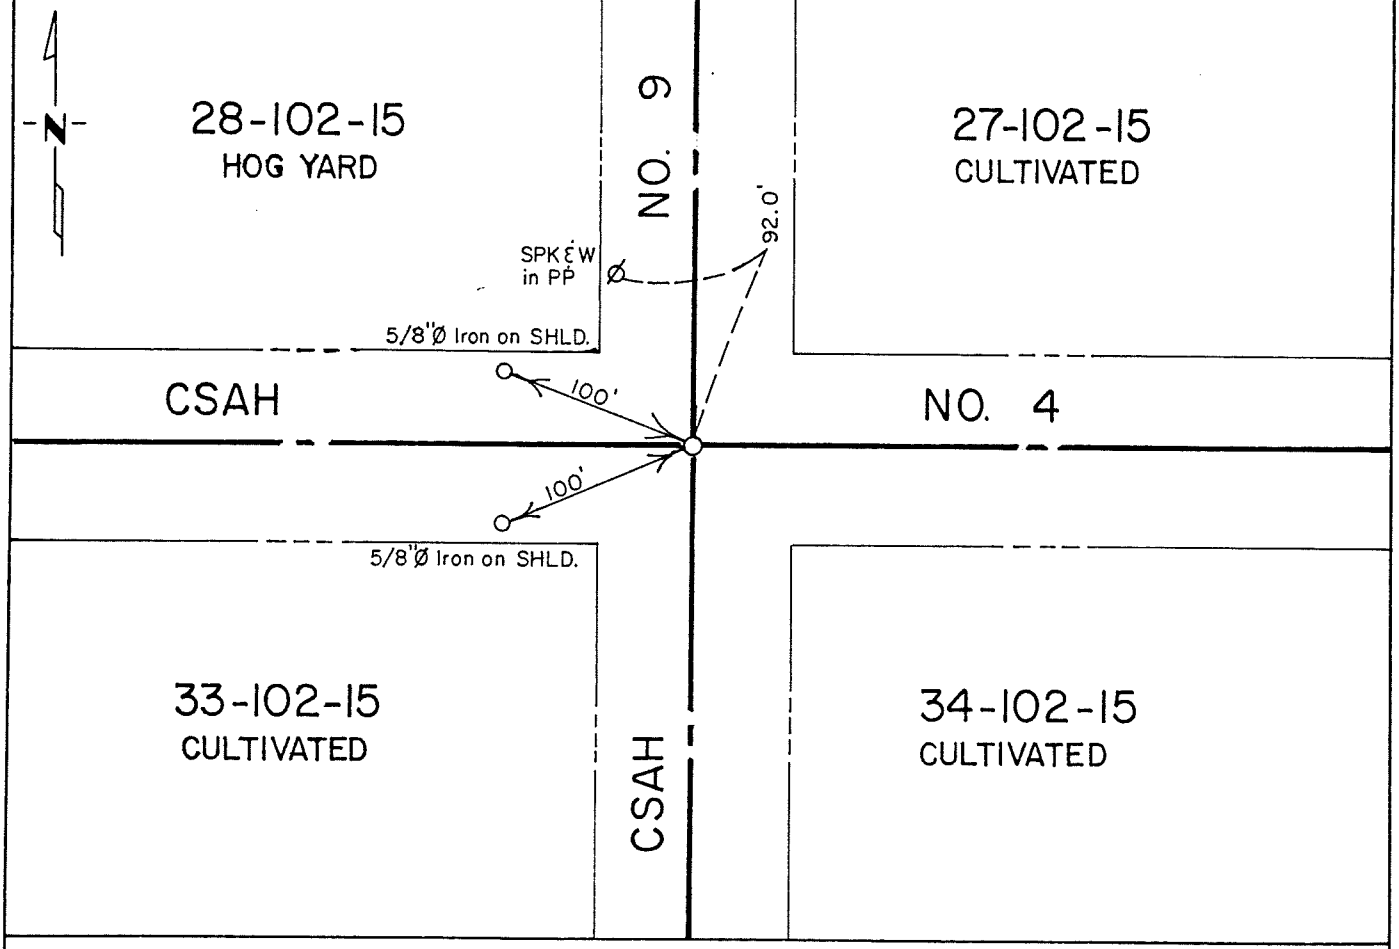

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-2-91

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Sec 34-102-15

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept.
Mower County Recorder's Office
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1940 Book "A" of the Mower County Engineer's Office shows inplace three rocks set vertical and ties were taken.

1953 Book "A" shows a concrete monument 3.0 feet below road surface and ties were taken.

1971 Book "A" shows corner found and the following ties were recorded:
91.3' NW to power pole
124.2' NE to tele pole
98.4' WNW to north end 18" RCP

1991 Jones, Haugh & Smith crew, under the direction of John H. Schulte IV, dug with County backhoe dug on centerline centerline of north-south-east-west roads for County State Aid Highway No. 9 grading project SAP 50-609-07. Excavation uncovered a Harrison cast iron monument over a 1/2" diameter iron over a concrete monument with a 1/2" diameter cast in center. Monument agrees with 1946 grading plan. Concrete monument set over three vertical stones. Left monument as found and placed a cast iron monument over concrete monument.

The monument found is in agreement with the record and fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 34, Township 102N, Range 15W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 4-25-1991 (DATE) found NO EVIDENCE OF PLS CORNER.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 5-21-91 (DATE) placed a cast iron monument on ℄ road at midpoint between Sec. corners.

SKETCH OF REFERENCE TIES

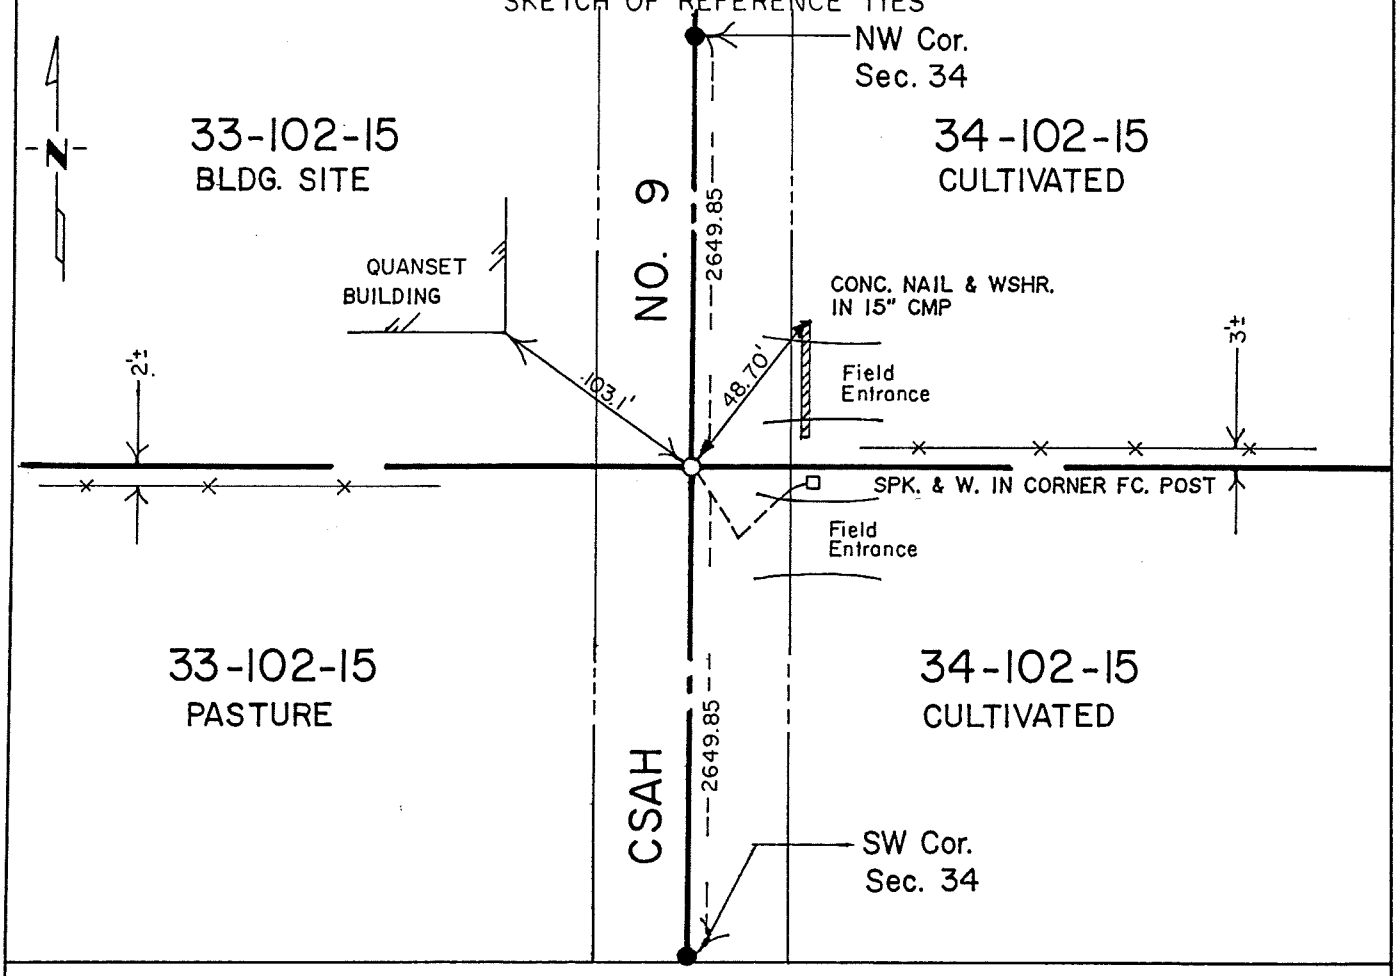

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-23-91

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Sec 34-102-15

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept.
Mower County Recorder's Office
Zenk Engineering
Tucker Land Surveying

No information was found to support evidence of a perpetuation of the original public land survey corner.

1991 Jones, Haugh & Smith crew, under the direction of John H. Schulte IV, dug with County backhoe dug on centerline centerline of north-south road for County State Aid Highway No. 9 grading project SAP 50-609-07. A 4'x15'x4' hole was excavated and no evidence of the original public land survey corner was found. Therefore, after taking measurements within the section, a cast iron monument was placed on the centerline N-S road at the midpoint between section corners.

The monument set fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.