P 22 "A"
Index No. P 85 "L"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 17, Township 102N, Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 11-21-89 (DATE) found a 1"x 2" WOOD STAKE 1" BELOW ROAD SURFACE OVER A 6"Ø CONCRETE MONUMENT WITH A 1/2"Ø IRON IN CENTER.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 11-21-89 (DATE) placed a 5/8"Ø x 16" IRON CAPPED RLS 13807 OVER MONUMENT.

SKETCH OF REFERENCE TIES

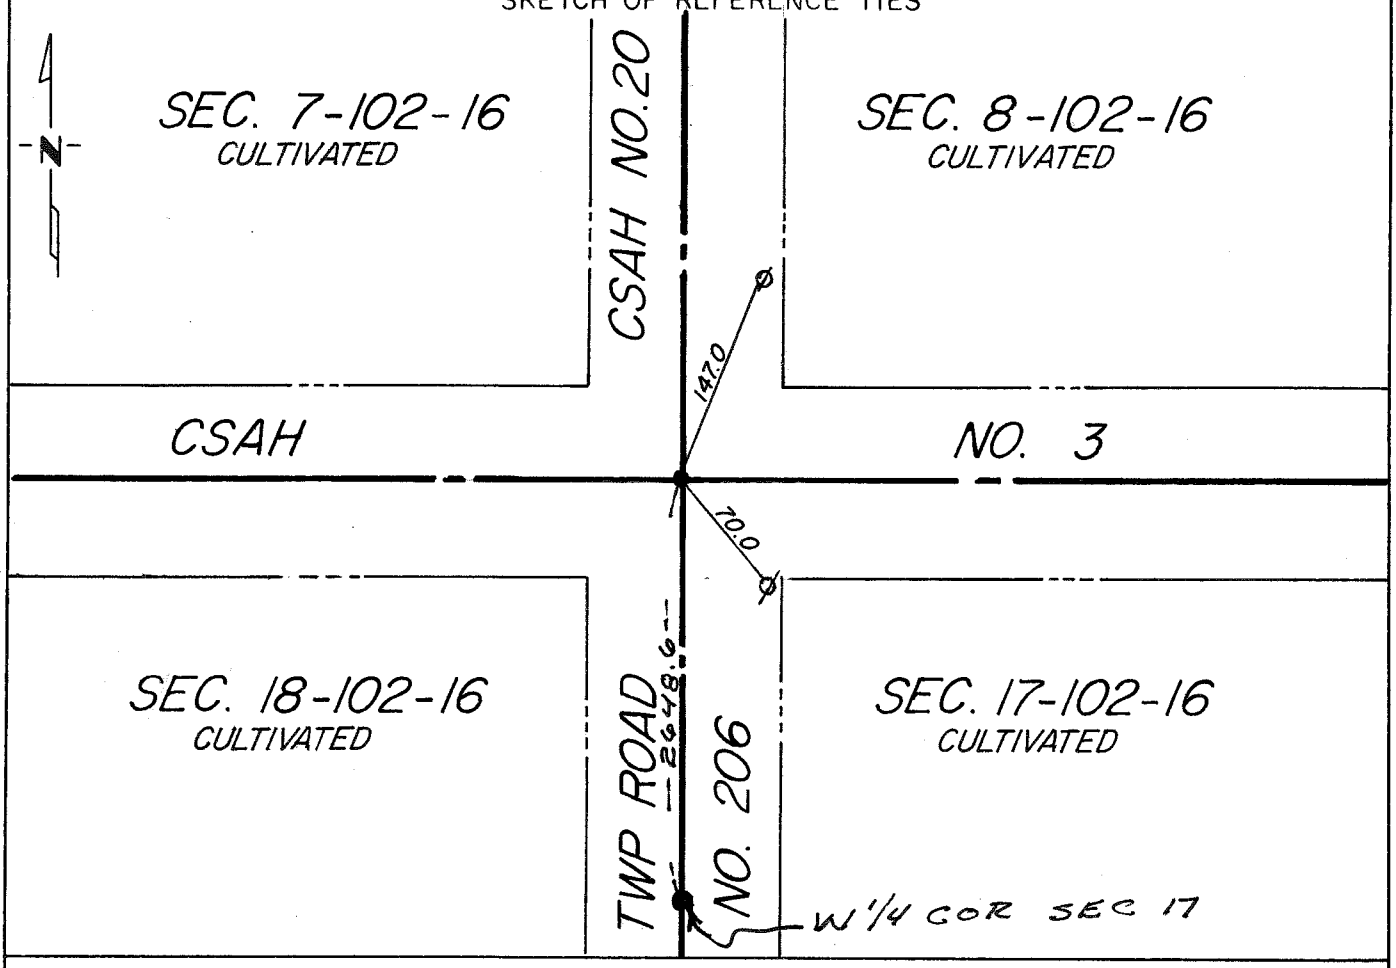

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 12-22-89 DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Section 17-102-16

This corner was originally established by Deputy Surveyor John Quigley of the United States General Land Office in 1853. The government notes show this corner was marked with a wood post in a mound of earth with a trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Records Office

1989 Jones, Haugh & Smith Inc. crew dug with the county backhoe operator and uncovered a 1" x 2" wood stake 1' below road surface. Continued digging and found a 6" diameter concrete monument with a ½" diameter iron in center 2.5' below road surface.

Therefore aceppted 1" x 2" wood stake and 6" diameter concrete monument as evidence of public land survey corner. Placed a 5/8"Ø x 16" iron capped RLS 13807 over monument.

Corner found fits occupation and road centerlines within the section. For electronic survey data and analysis, contact firm of Jones Haugh & Smith.

Index No. p22, "O" p85, "M"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 17, Township 102N, Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 11-21-89 (DATE) found a NO EVIDENCE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 11-21-89 (DATE) placed a 5/8"Ø x 16" IRON CAPPED RLS 13807 ON CENTER LINE OF NORTH-SOUTH ROAD AT MIDPOINT BETWEEN NW & SW CORNER.

SKETCH OF REFERENCE TIES

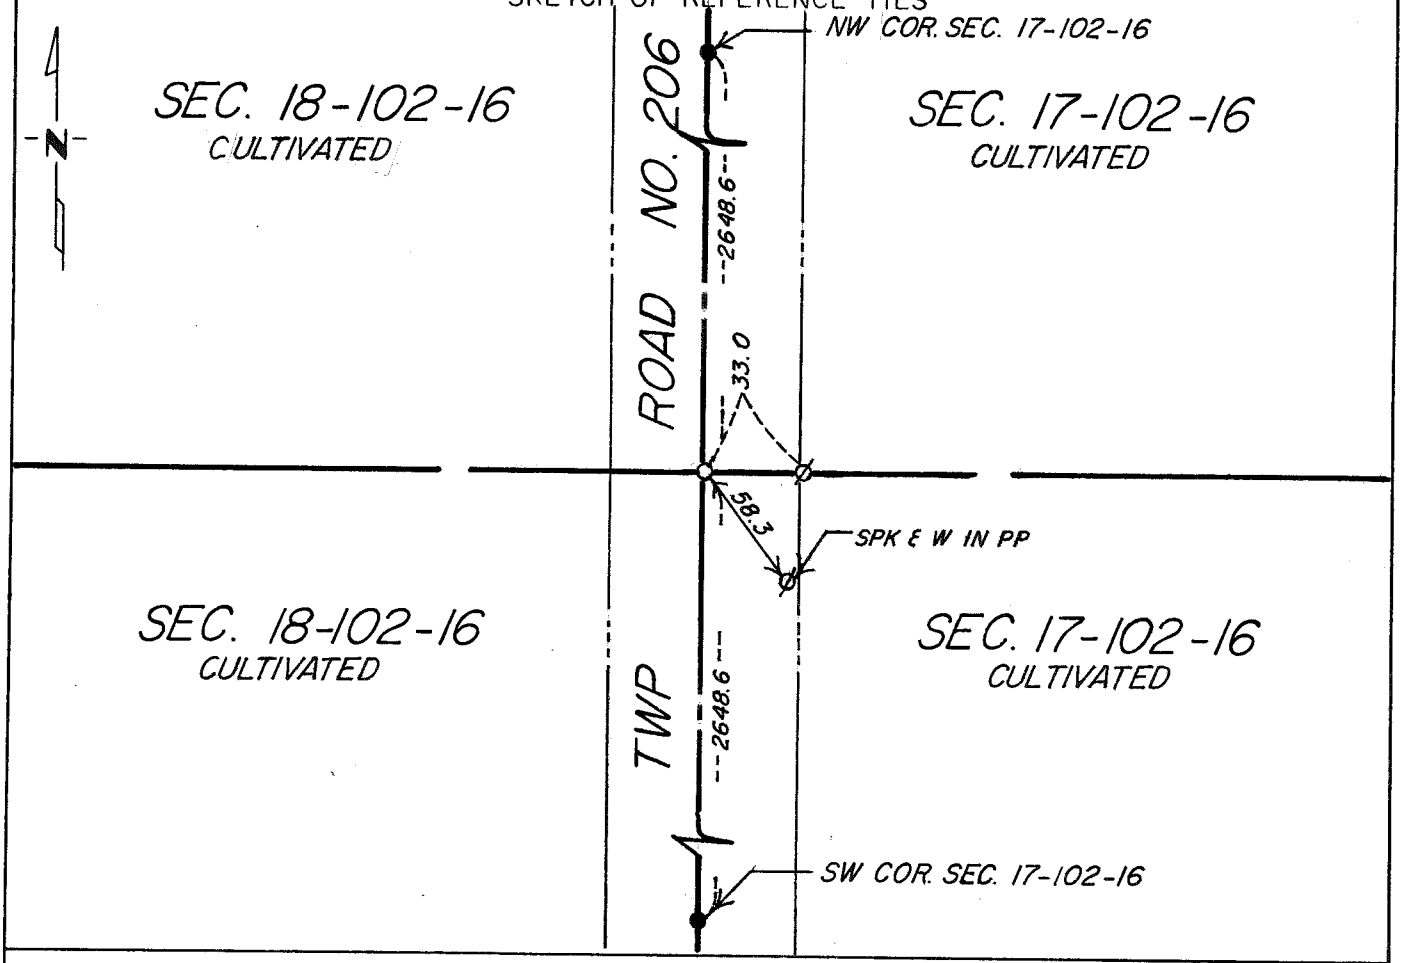

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 12-22-89 DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

$W\frac{1}{4}$ corner Section 17-102-16

This corner was originally established by Deputy Surveyor John Quigley of the United States General Land Office in 1853. The government notes show this corner was marked with a wood post in a mound of earth with a trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorders Office

1989 Jones, Haugh & Smith Inc. crew together dug with the Mower County backhoe operator a hole 4' x 8'x 5' deep and found no further evidence of public land survey corner or a perpetuation thereof.

Therefore we placed a 5/8"Ø x 16" iron capped RLS 13807 at the midpoint of a straight line between northwest & southwest section. This location fits occupation road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analyaia, contact firm of Jones, Haugh & Smith.

p 22 "P"

Index No. P85 "N"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 17, Township 102N, Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 11-21-89 (DATE) found a 3/4"Ø PIPE 1" BELOW ROAD SURFACE.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 11-21-89 (DATE) placed a 5/8"Ø IRON CAPPED RLS 13807 AT LOCATION OF 3/4"Ø PIPE.

SKETCH OF REFERENCE TIES

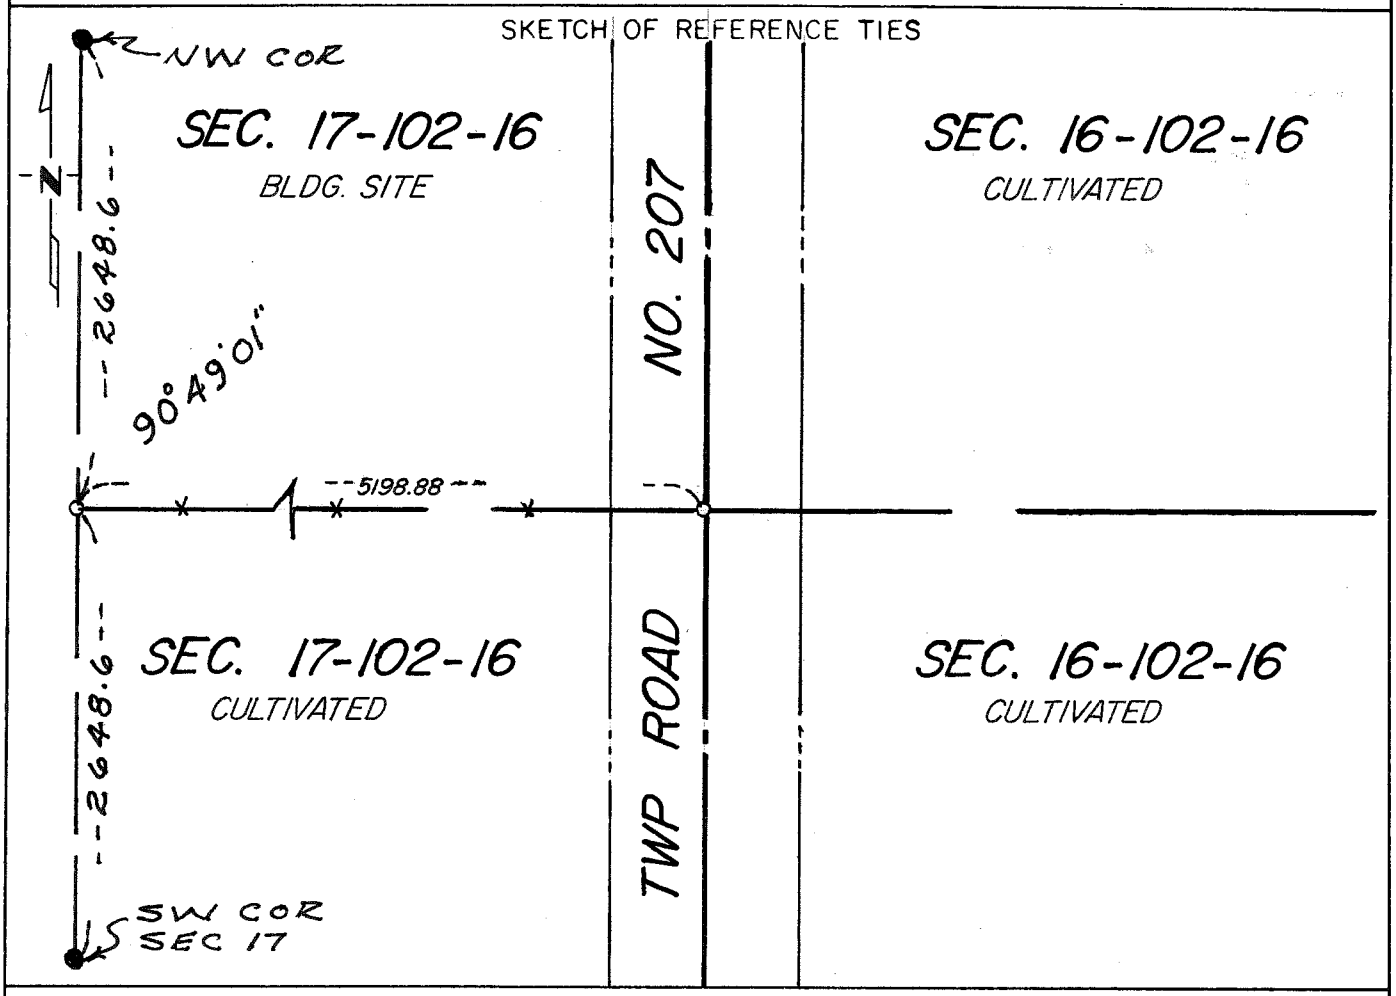

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] 12-22-89
SIGNATURE DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

E¼ corner Section 17-102-16

This corner was originally established by Deputy Surveyor John Quigley of the United States General Land Office in 1853. The government notes show this corner was marked with a wood post in a mound of earth with a trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorders office

1989 Jones, Haugh & Smith Inc. crew dug with the county backhoe operator and uncovered a 3/4" diameter pipe 1' below road surface. Continued digging and found no further evidence of public land survey corner.

Therefore accepted 3/4" diameter pipe as a perpetuation of the public land survey corner and placed a 5/8" diameter iron at location of 3/4" pipe.

Corner found fits occupation and road centerline within the section. For electronic survey data and analysis, contact firm of Jones, Haugh & Smith.