Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 17, Township 102N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/01/1995 (DATE) found a STONE AND PIECES OF WOOD STAKE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 05/01/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

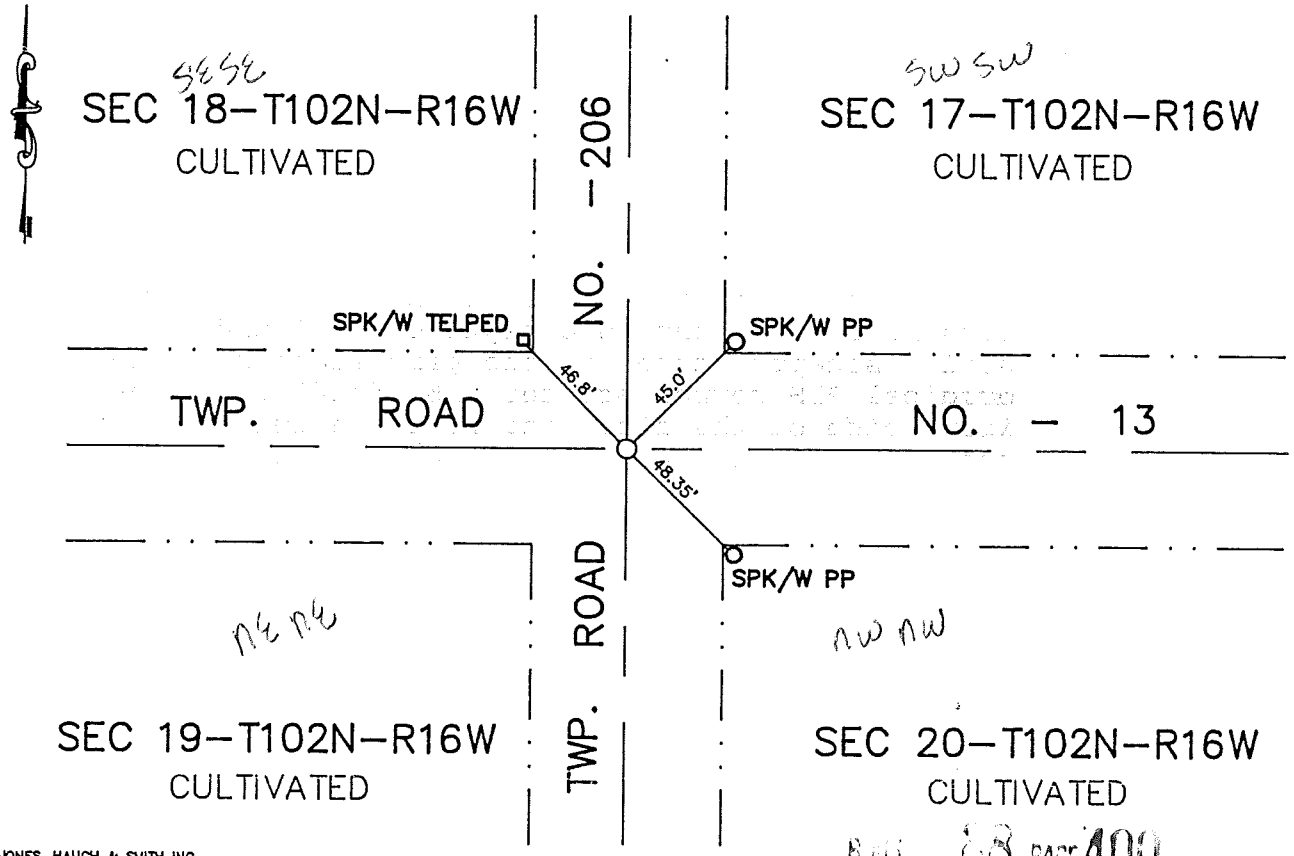

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Book 88 PAGE 400

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-25-95

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 26 day of Sept A.D., 1995

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 439611

M.H.D. FORM NO. 2105

Book 88 Misc Page 400

SW Cor SEC 17-102-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1853 Mower County records state an in-placed stone 3' X 20" diameter at this location is the corner of the section. An old Oak stake was also found and placed over the stone.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at CL CL intersection N-S twp. road and E-W twp. road. A 1/2" X 24" iron was found 6" below the road surface. Continued digging and found stone and pieces of wood stake 2' deep. The stone and pieces of wood stake were accepted as the true corner, and a cast iron monument was placed over, 4" below the road surface.

The monument fit occupation and road centerlines within the section and is in agreement with the records and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

BOOK 88 PAGE 401

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 18, Township 102N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 06/20/2001 (DATE) placed a CIM

SKETCH OF REFERENCE TIES

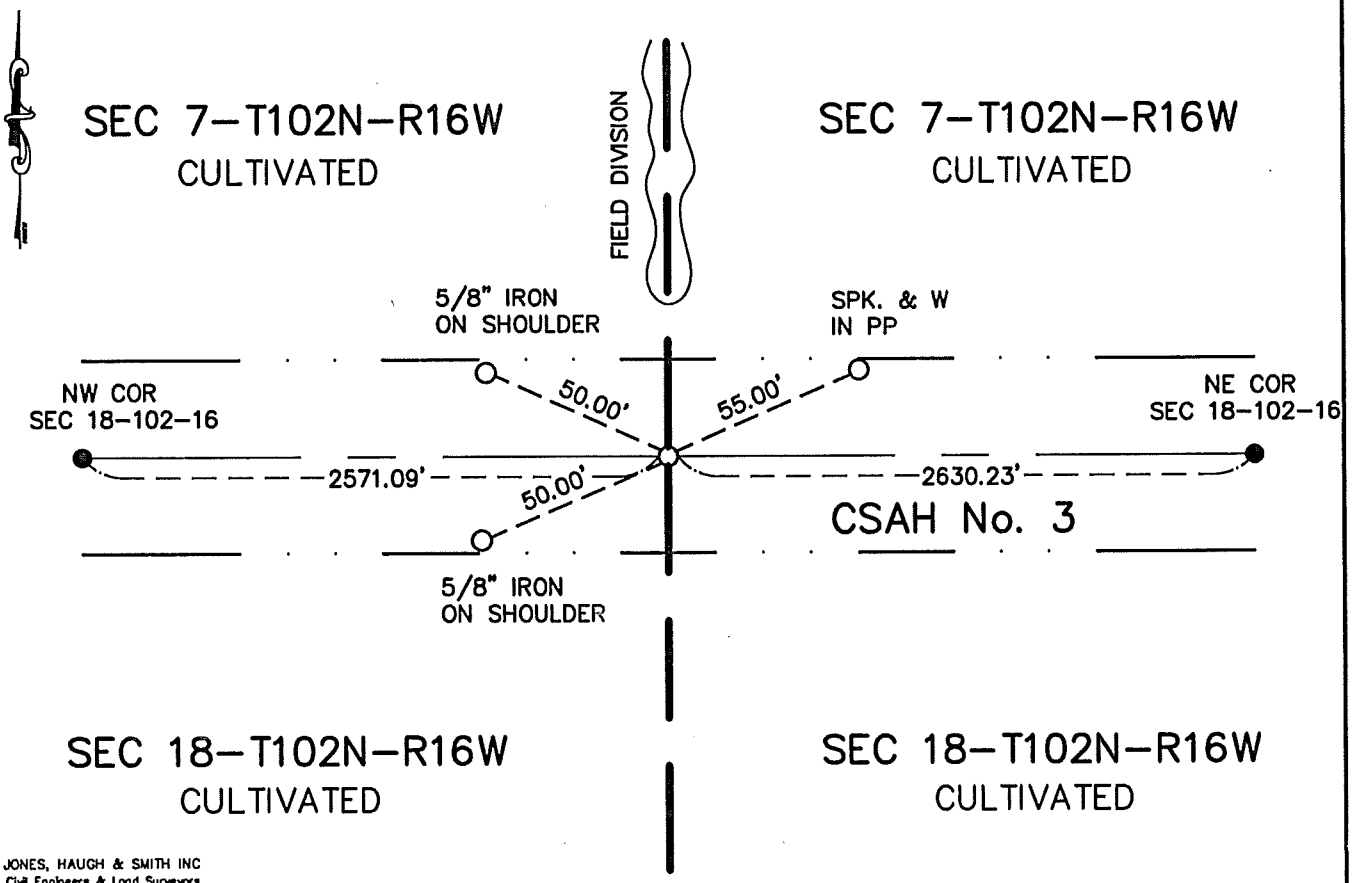

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 7-10-01 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

N 1/4 Cor Sec 18-102-16

Deputy Surveyor John Quigley of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

2001 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with Mower County backhoe, at the intersection of centerline of CSAH No. 3 and fence line North and found nothing. Mower Co. Highway Dept. notes state that road was subcut during last grading project. All evidence is presumed to be destroyed. Accepted intersection of centerline of CSAH No. 3 and field division North as best evidence of a perpetuation of original PLS corner as shown on Mower Co. grading plan. This location also fits distances given on Mower Co. grading plan. Set a CIM at location and took new ties.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 20, Township 102 Range 16, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On _____ (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a NO MONUMENT PLACED

SKETCH OF REFERENCE TIES

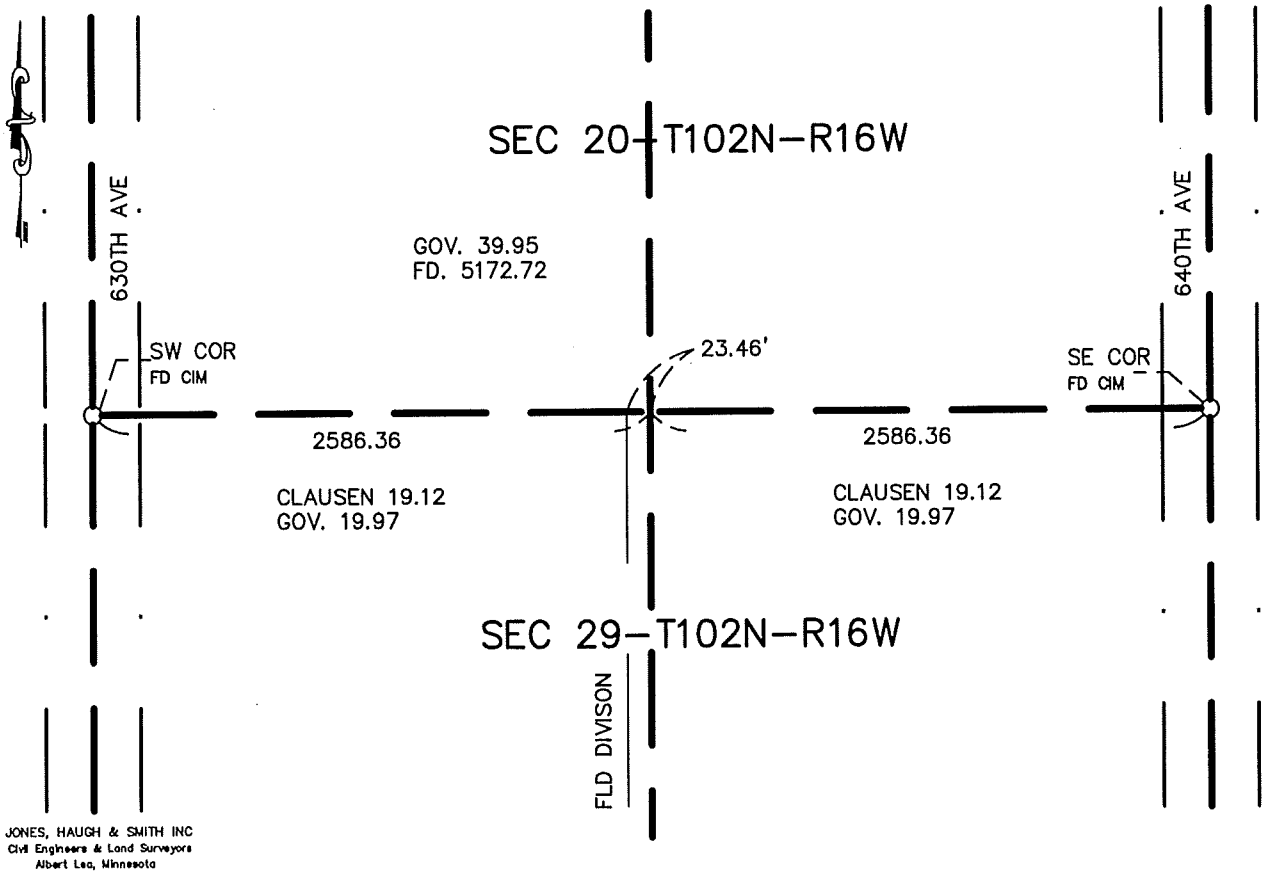

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ 6-4-04
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

S1/4 Corner Section 20-T102N-R16W

Deputy Surveyor John Quigley of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Department
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1888 Clausen field notes show a post at the midpoint of straight line between section corners and a measured distance of 5163.84 on south line of section.

2004 JHS crew measured South line of section 20 and found 5172.72 Vs. Clausen 5163.84. The location of the ¼ corner therefore the position was computed at midpoint of a straight line between section corners.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 21, Township 102N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/14/1997 (DATE) found a STONE WITH OAK STAKE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 05/14/1997 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

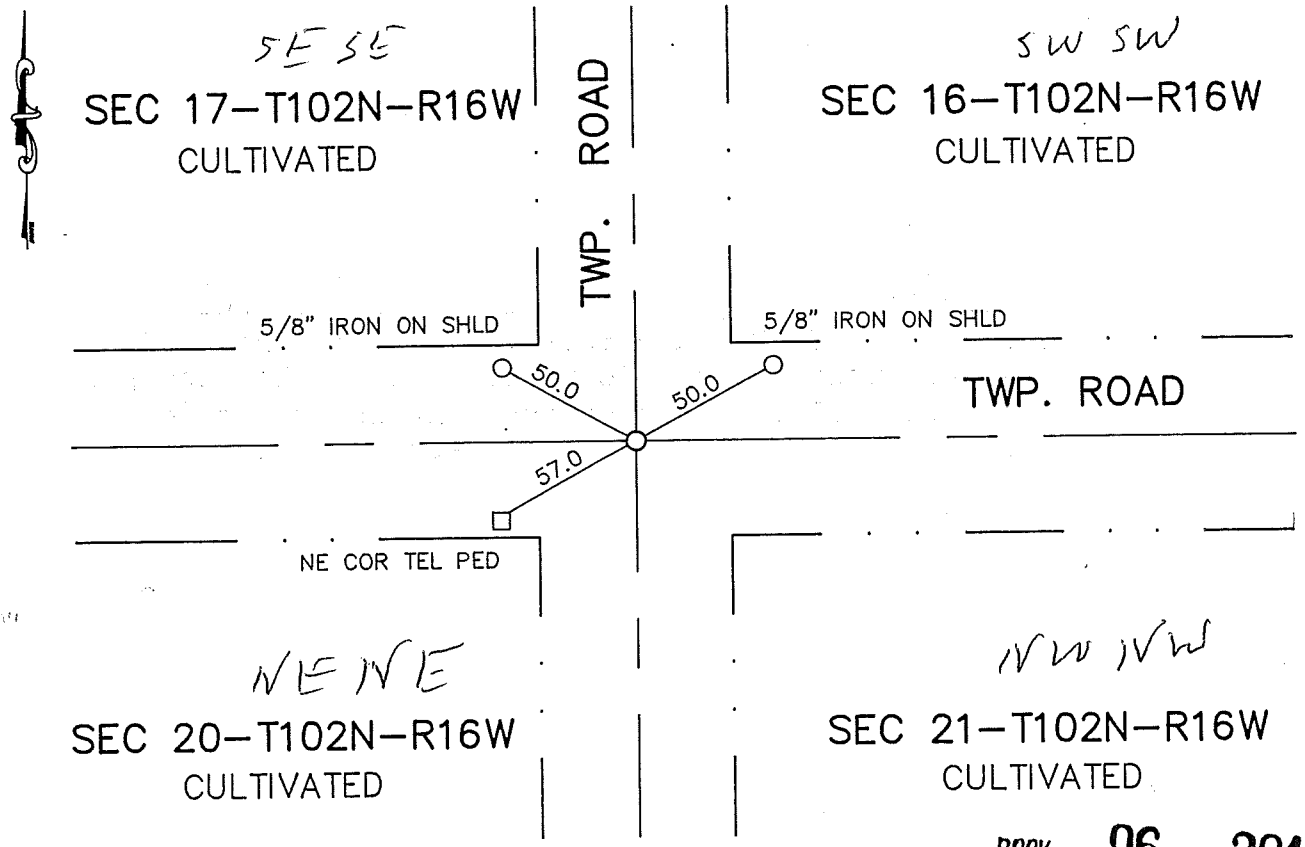

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 96 PAGE 291

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-9-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P .M. on the 10 day of Sept A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 456090

M.H.D. FORM NO. 2105

Book 96 Misc Page 291

NW Cor SEC 21-102-16

This corner was originally established by Deputy Surveyor John Quiqley of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1997 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with the Mower County backhoe on centerline of N-S and E-W township road Uncovered rock with an Oak hub on the south side of rock 4.0' below surface. Accepted rock as true PLS corner and set a 5/8"x16" iron capped 13807 on the north side of rock . Placed a cast iron monument 0.4' below road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 21, Township 102N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/14/1997 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 05/14/1997 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

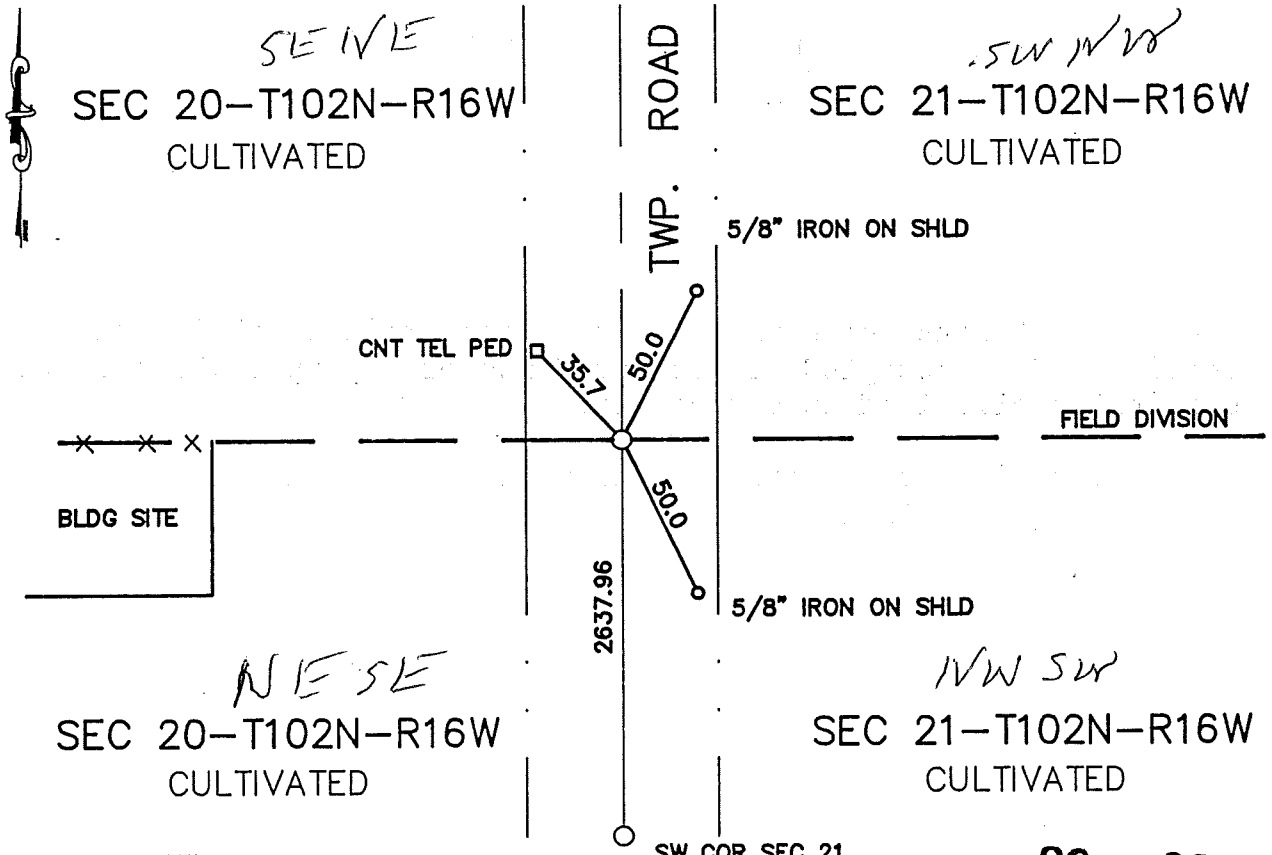

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 96 PAGE 293

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-9-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P .M. on the 10 day of Sept A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 456001

M.H.D. FORM NO. 2105

Book 96 Misc Page 293

W 1/4 Cor SEC 21-102-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1997 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with the county backhoe at the CL of township road N-S and in line with field division east. Dug to virgin soil and found no evidence of original PLS corner.
Located the remains of an old line fence 1000'+/- west of township road. Extended fence to township road and set a cast iron monument at the CL of township road and in line with line fence west.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 21, Township 102N Range 16W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-20-93 (DATE) found a 2"×2"×12" PIECE OF OLD CORNER FENCE POST WITH A 6"ø LOOP OF BARBED WIRE LAYING NEXT TO POST

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-20-93 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

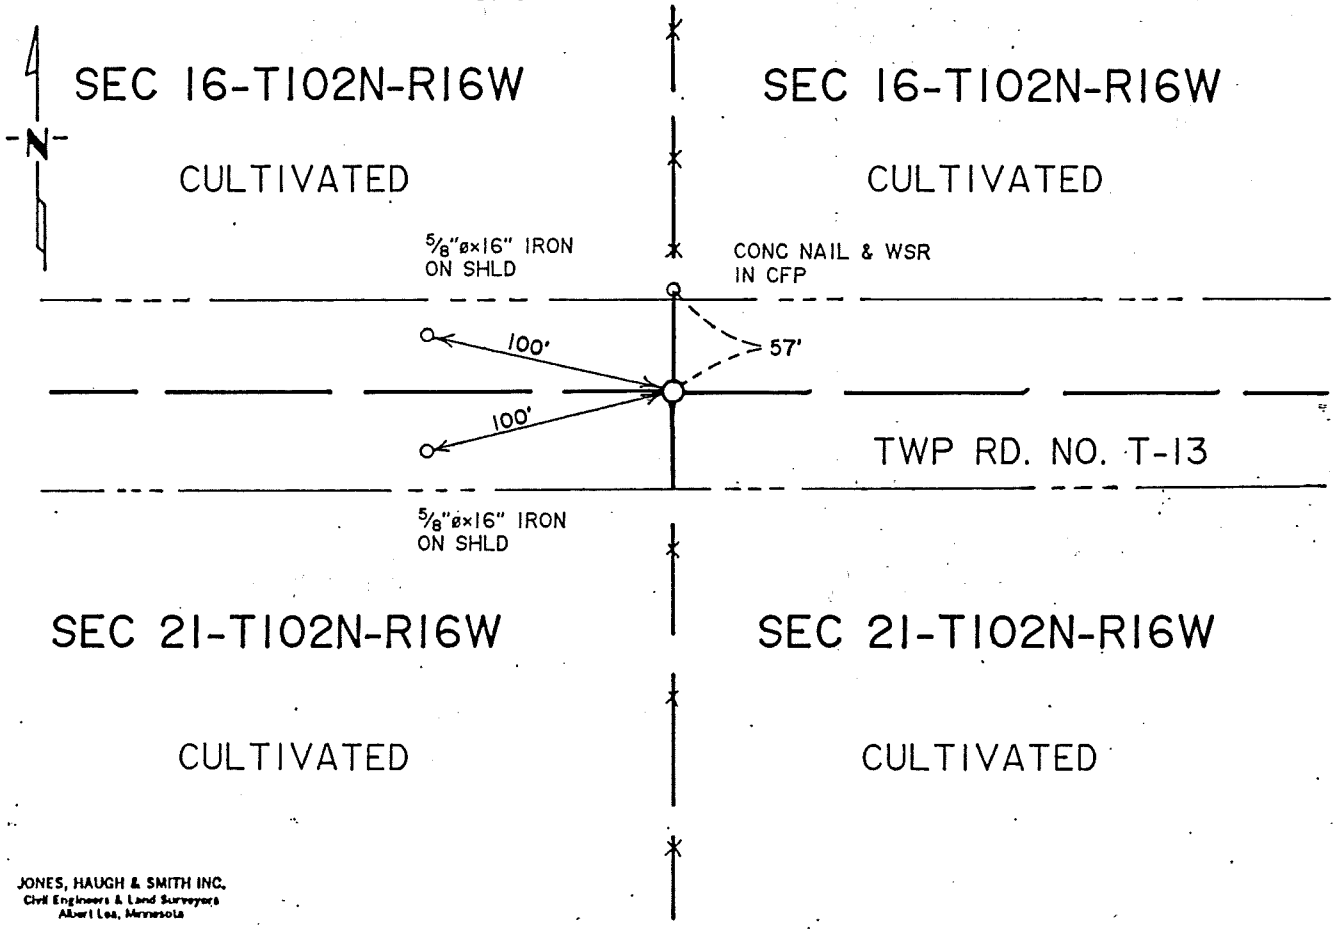

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ 5-25-93
SIGNATURE DATE

Registration No. 13607

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A.M. on the 26 day of MAY A.D., 1993

COUNTY RECORDER Amanda Enman

By Marlene Martin, Deputy

DOCUMENT NO. 421014

Book 79 Misc Pg 475

M.H.D. FORM NO. 2105

BOOK 79 PAGE 475

STATEMENT OF EVIDENCE

N 1/4 corner Section 21-102-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, Reg. No. 13807, dug a 5'x4'x15' long hole on the centerline of the east-west township road and in line with north-south fences. We dug to a depth of 4 feet which was virgin soil and uncovered a 2"x2"x12" piece of old wood corner post with a 6" diameter barbed wire loop laying next to post found. Location of post found was in centerline of east-west township road and also in line with north-south line fences. Placed a cast iron monument over location of post and barbed wire found near the road surface.

The monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 21, Township 102N Range 16W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-20-93 (DATE) found a 8"x8"x18" POINTED FIELD STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-20-93 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

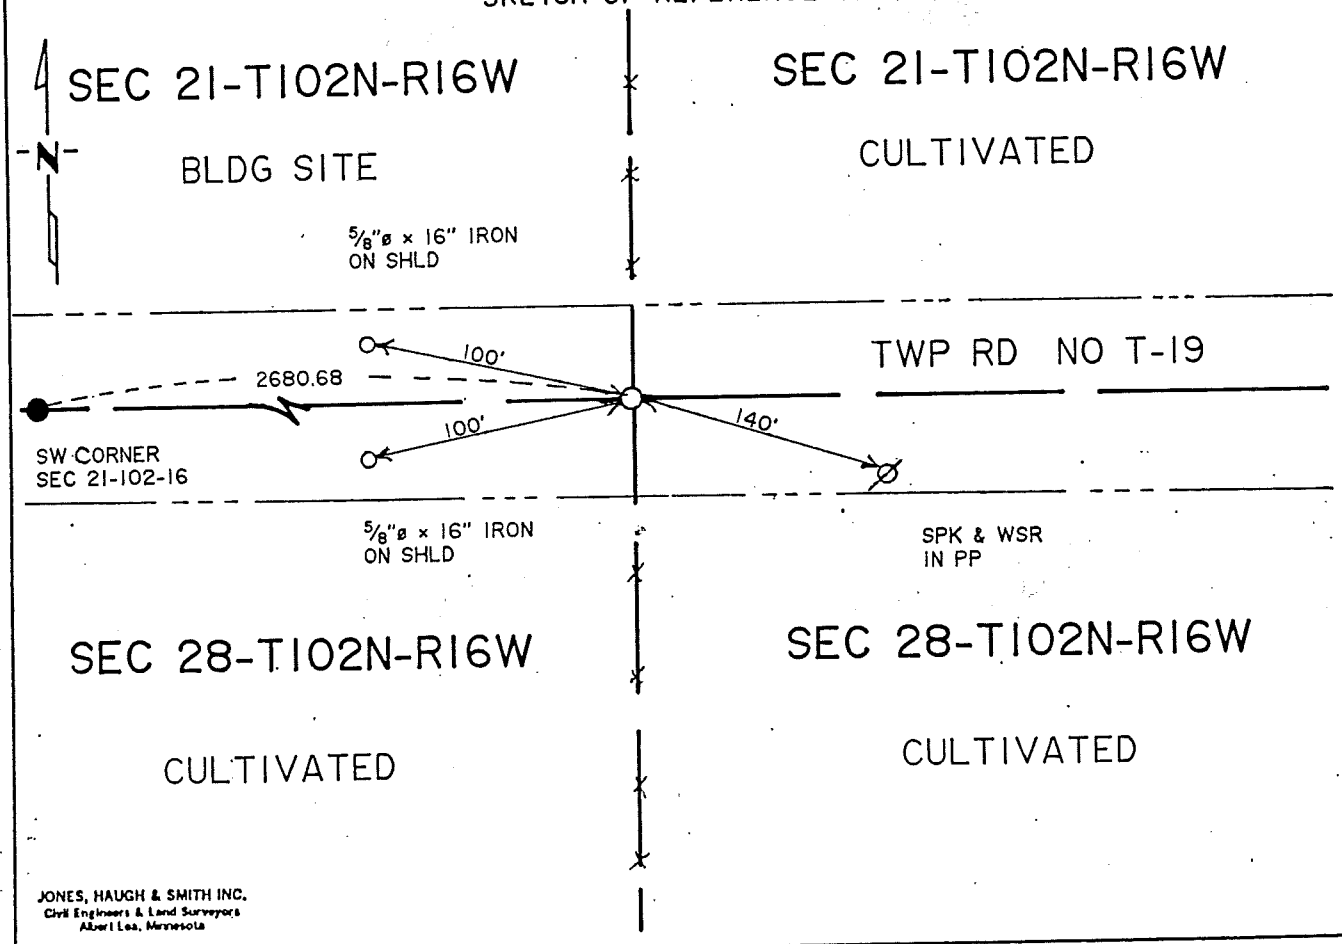

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] 5-25-93
SIGNATURE DATE

Registration No. 13607

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A.M. on the 26 day of May A.D., 1993

COUNTY RECORDER Amanda Enger

By Marlene Martin, Deputy

DOCUMENT NO. 421013

Book 79 Misc Pg 473

M.H.D. FORM NO. 2105

BOOK 79 PAGE 473

STATEMENT OF EVIDENCE

S 1/4 corner Section 21-102-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1888 Clausen, Mower County Surveyor, found a government post at a distance of 40.54 chains from the northwest and northeast corner of Section 28-102-16.

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, Reg. No. 13807, dug a 5'x3'x12' long hole on the centerline of the east-west township road and in line with north-south line fences. We found an 8"x8"x18" pointed field stone resting in virgin soil and on centerline of east-west roads and in line with north-south line fences. Therefore we accepted stone found as the best evidence of a perpetuation of the original public land survey corner and set a cast iron monument near road surface above stone found.

The monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 21, Township 102N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On — DATE found a POINTED STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On — DATE placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

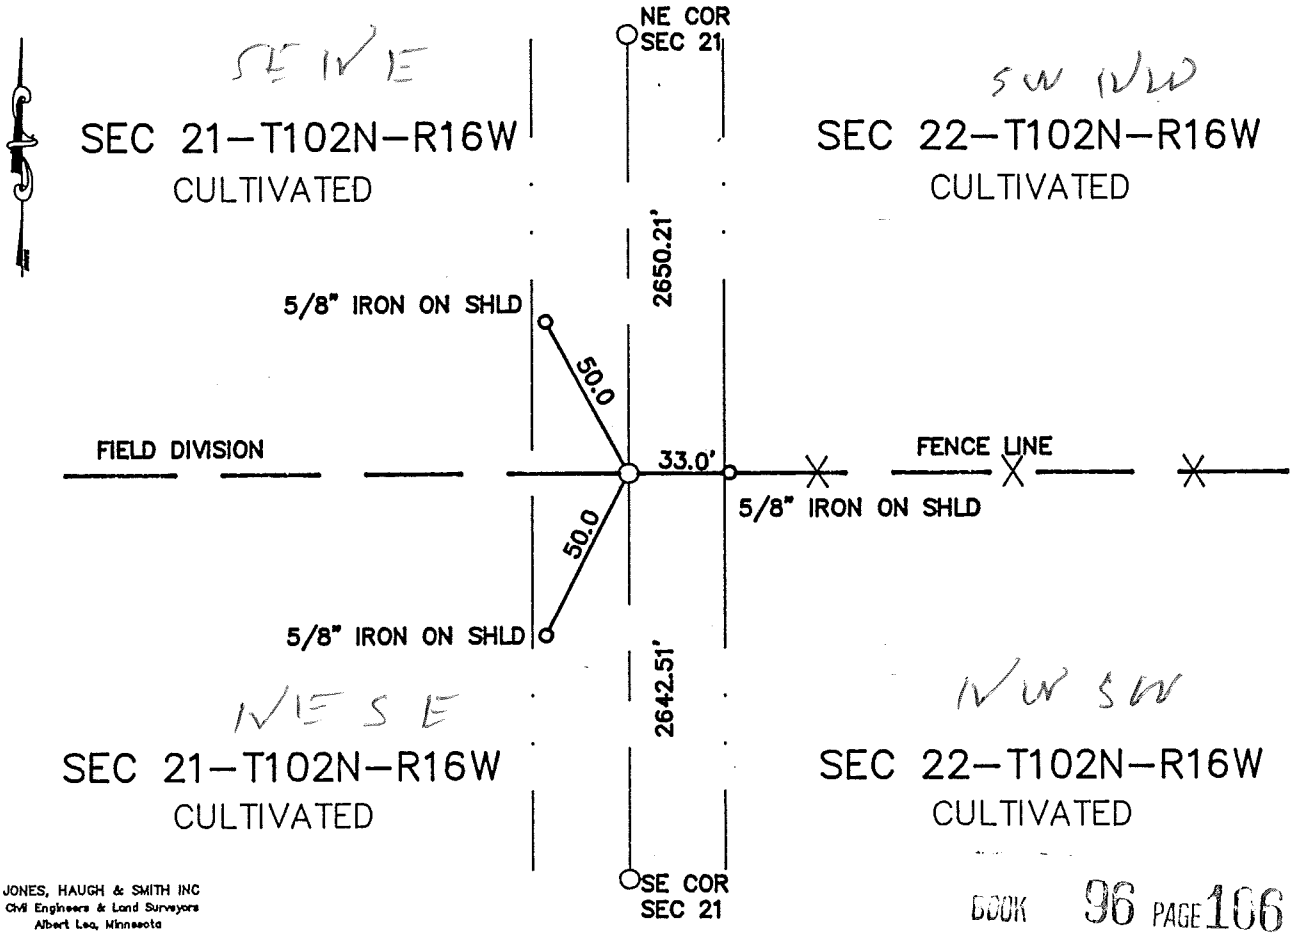

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 96 PAGE 106

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-4-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 6 day of Aug A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 455217

M.H.D. FORM NO. 2105

Book 96 Misc Page 106

E 1/4 Cor SEC 21-102-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1997 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe on centerline of township road and in line with fence east. Uncovered a pointed rock at 1.8' deep, on centerline of township road and in line with line fence east. Accepted rock as true PLS corner. Set 5/8" x 16" iron with cast iron monument over rock found 0.40 below road surface. Set 5/8" iron on north side of rock, cap no. 13807.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 21, Township 102N Range 16W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-20-93 (DATE) found a 8" x 8" x 18" POINTED FIELD STONE & A 2"x2"x4" BRICK LAYING ON EAST SIDE OF STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-20-93 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

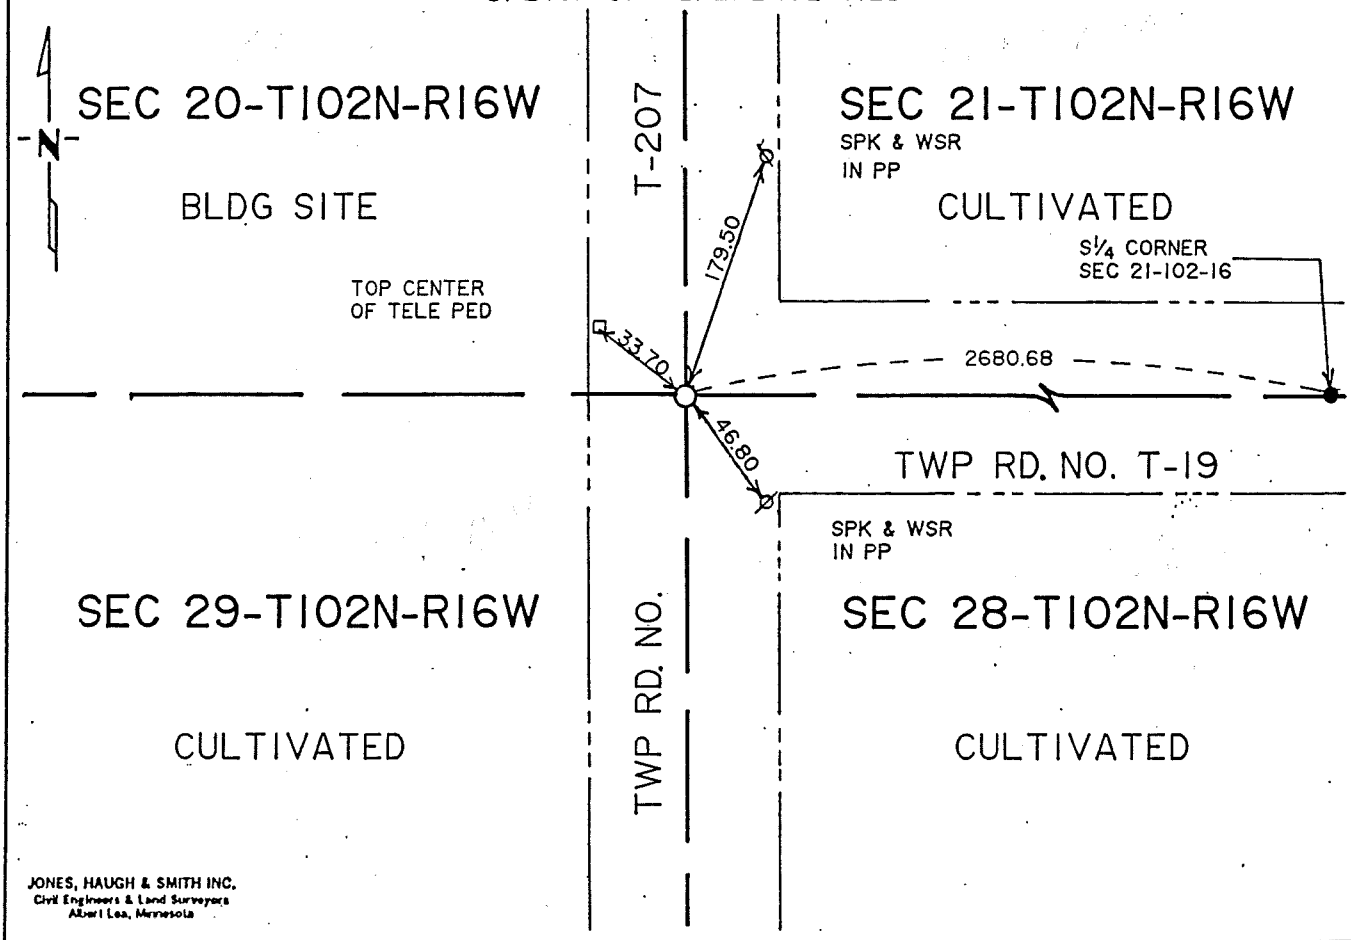

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-25-93

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A.M. on the 26 day of May A.D., 1993

COUNTY RECORDER Amanda Engo

By Marlene Martin, Deputy

DOCUMENT NO. 421012
Book 79 Misc Pg 471

M.H.D. FORM NO. 2105

BOOK 79 PAGE 471

STATEMENT OF EVIDENCE

SW corner Section 21-102-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1888 Clausen, Mower County Surveyor, indicates a government corner at the southeast corner of Section 20-102-16.

1892 Clausen, Mower County, Surveyor, indicates an iron bolt at the northeast corner of Section 29-102-16.

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, Reg. No. 13807, dug a 4'x2'x10' long hole on the centerline centerline of the east-west and north-south township roads. We found an 8"x12"x18" pointed field stone resting in virgin soil with a 2"x2"x4" piece of brick resting on the east side of the stone found. Therefore we accepted stone and brick found as the best evidence of a perpetuation of the original public land survey corner and set a cast iron monument near road surface above monuments found.

The monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 24, Township 102N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 10/18/1996 (DATE) found a HARRISON MONUMENT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10/18/1996 (DATE) placed a –

SKETCH OF REFERENCE TIES

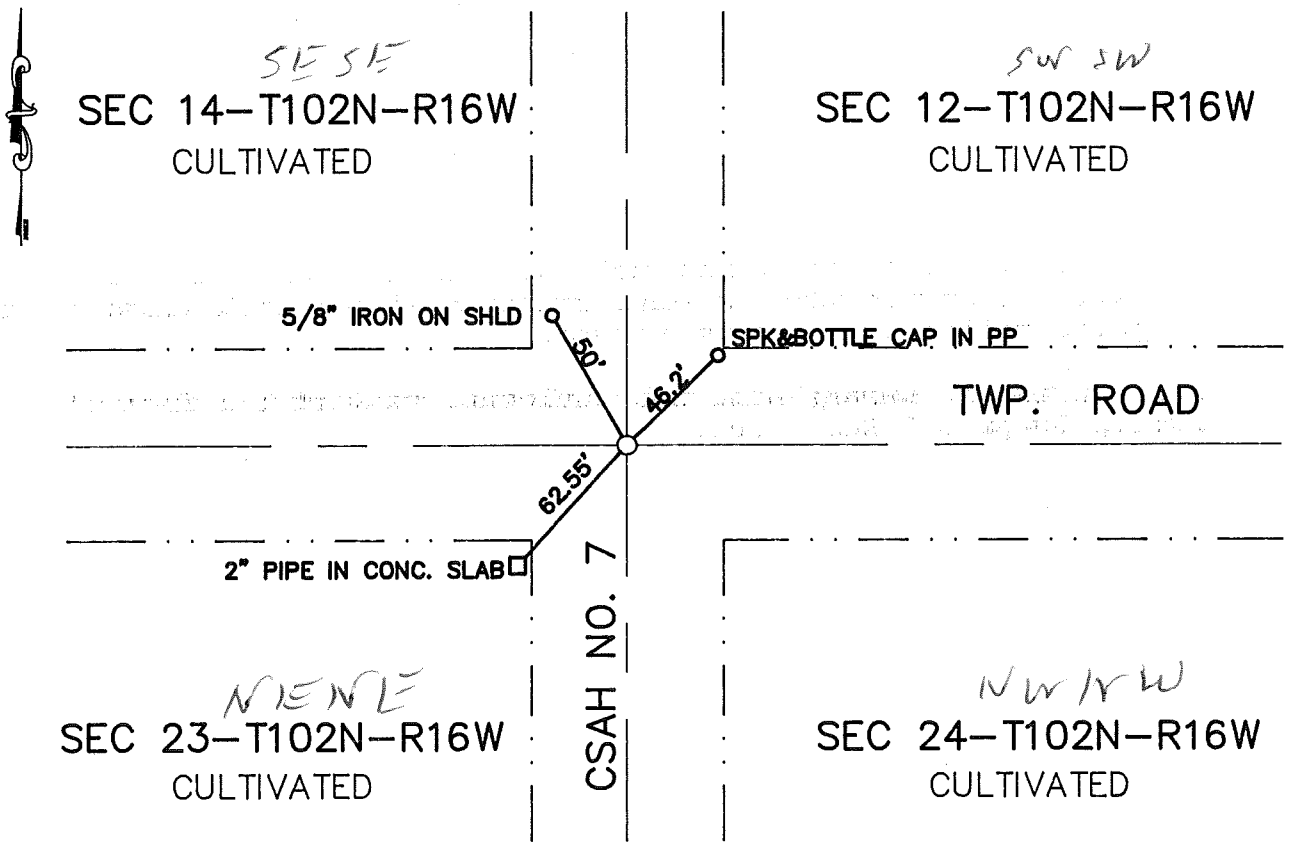

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 4-22-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 23 day of Apr A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 452557

M.H.D. FORM NO. 2105

BOOK 95 PAGE 49 Book 95 Misc Page 49

NW Cor SEC 24-102-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand at the CL of township road E-W and at the CL of CSAH No. 7 road N-S. Uncovered a Harrison monument at the CL CL of CSAH No. 7 and township road, which is believed to be a perpetuation of the corner found by Mower County during reconstruction of CSAH No. 7.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 24, Township 102N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 10/18/1996 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10/18/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

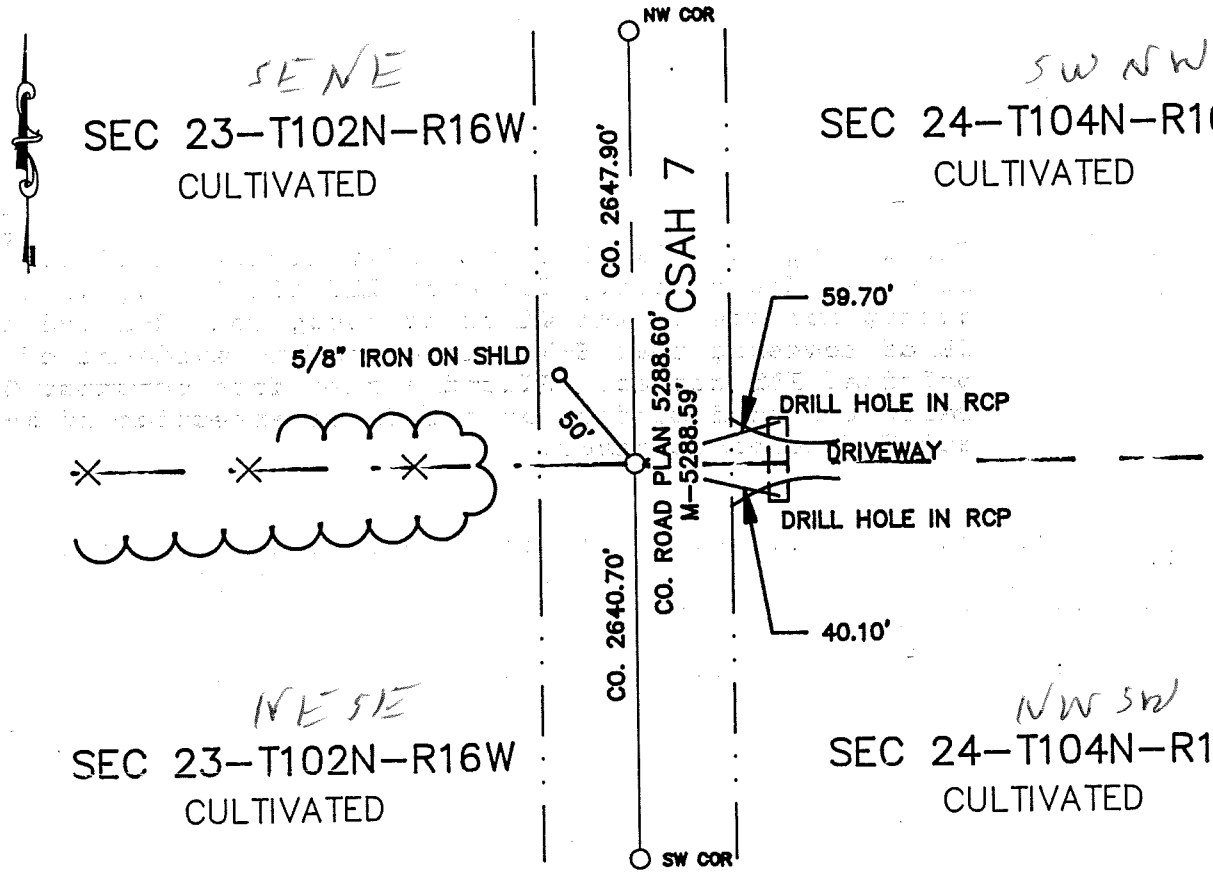

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-8-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P.M. on the 14 day of May A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 453075

M.H.D. FORM NO. 2105 BOOK 95 PAGE 187

Book 95 Misc Page 187

W 1/4 Cor SEC 24-102-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of CSAH No. 7 and in line with line fence west. Dug to virgin soil and found no evidence of original PLS corner. Placed a cast iron monument on a straight line between the NW and SW corners at distances shown on county road plan of 2640.7' north of SW corner of section.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 24, Township 102N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 10/18/1996 (DATE) found a HARRISON MONUMENT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10/18/1996 (DATE) placed a –

SKETCH OF REFERENCE TIES

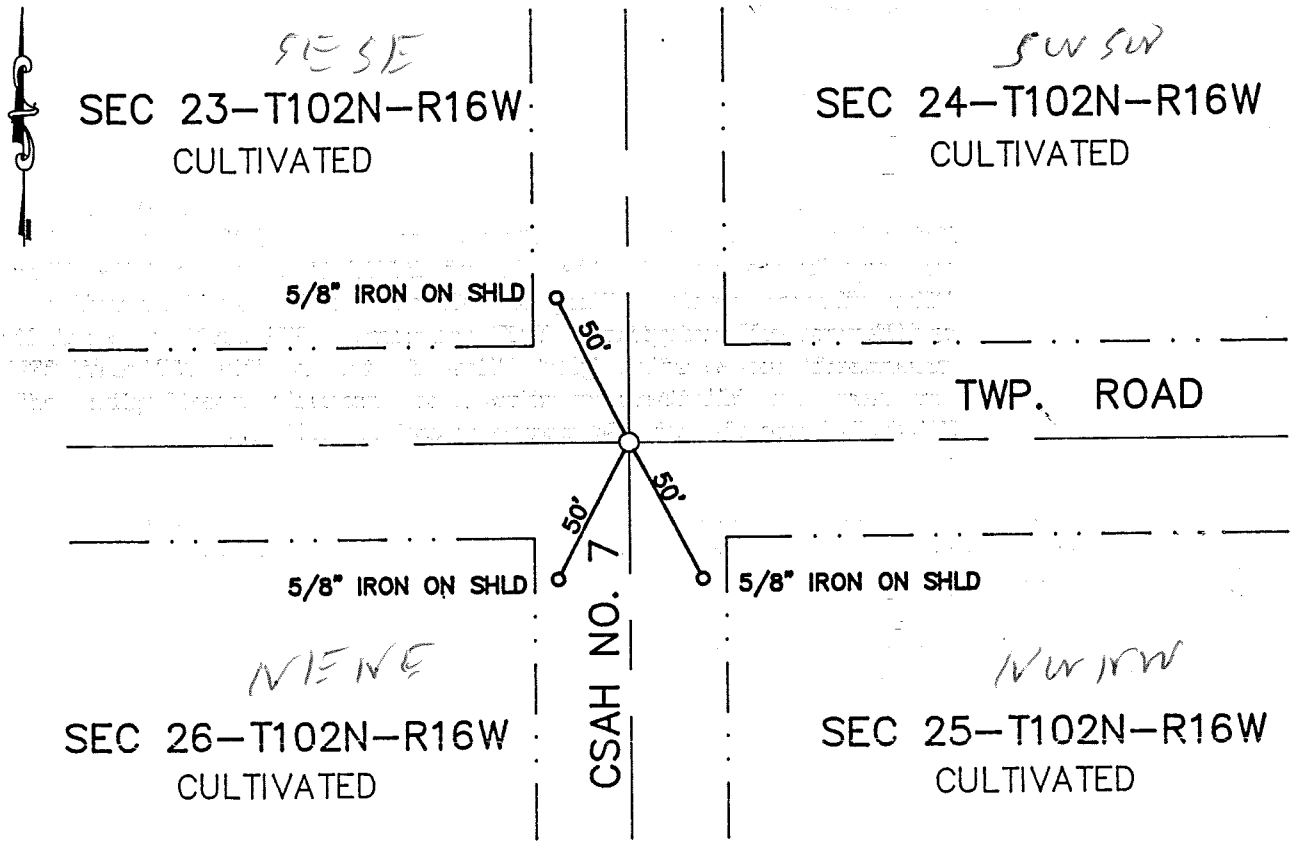

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 5-8-97 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 p .M. on the 14 day of May A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M Davis, Deputy

DOCUMENT NO. 453076

M.H.D. FORM NO. 2105 BOOK 95 PAGE 189

Book 95 Misc Page 189

SW Cor SEC 24-102-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand at the intersection of CSAH No. 7 N-S and township road E-W. Uncovered a Harrison monument. Took monument as a perpetuation of original PLS corner. Set by Mower County personnel after the reconstruction of CSAH No. 7.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 29, Township 102N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 10/24/1996 (DATE) found a 1'X1.8' STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10/24/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

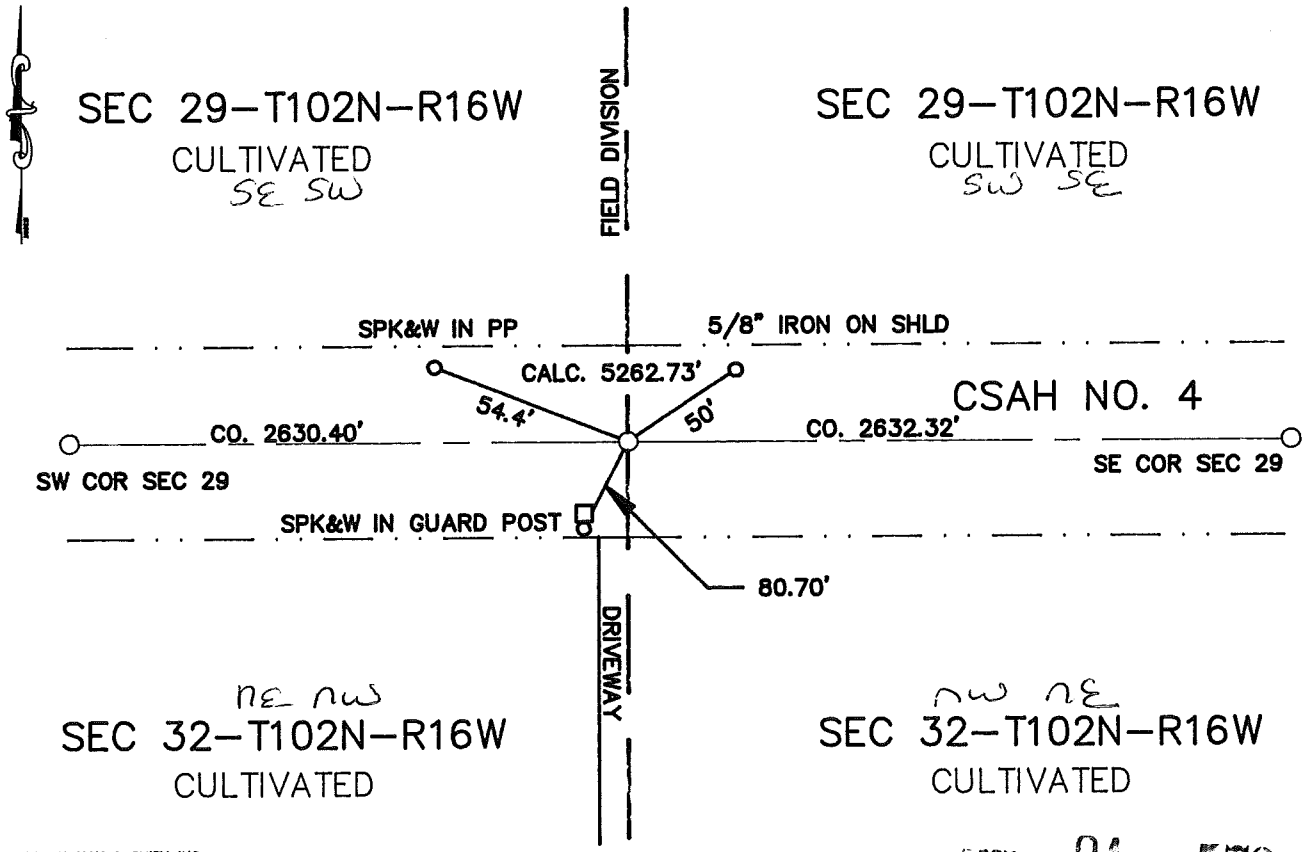

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 94 PAGE 570

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 4-4-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P.M. on the 9 day of April A.D., 1997

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 452260

M.H.D. FORM NO. 2105

Book 94 Misc Page 570

S 1/4 Cor SEC 29-102-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of CSAH No. 4 E-W. Uncovered a 1'x1.8' pointed stone 3.5' below the road surface. Continued digging and found no other evidence of original PLS corner. Accepted stone as a perpetuation of original PLS corner. Placed a 5/8" iron capped #13807 on the east side of stone. Placed a cast iron monument above stone found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

BOOK 94 PAGE 571

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 29, Township 102N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 09/03/1996 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 09/03/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

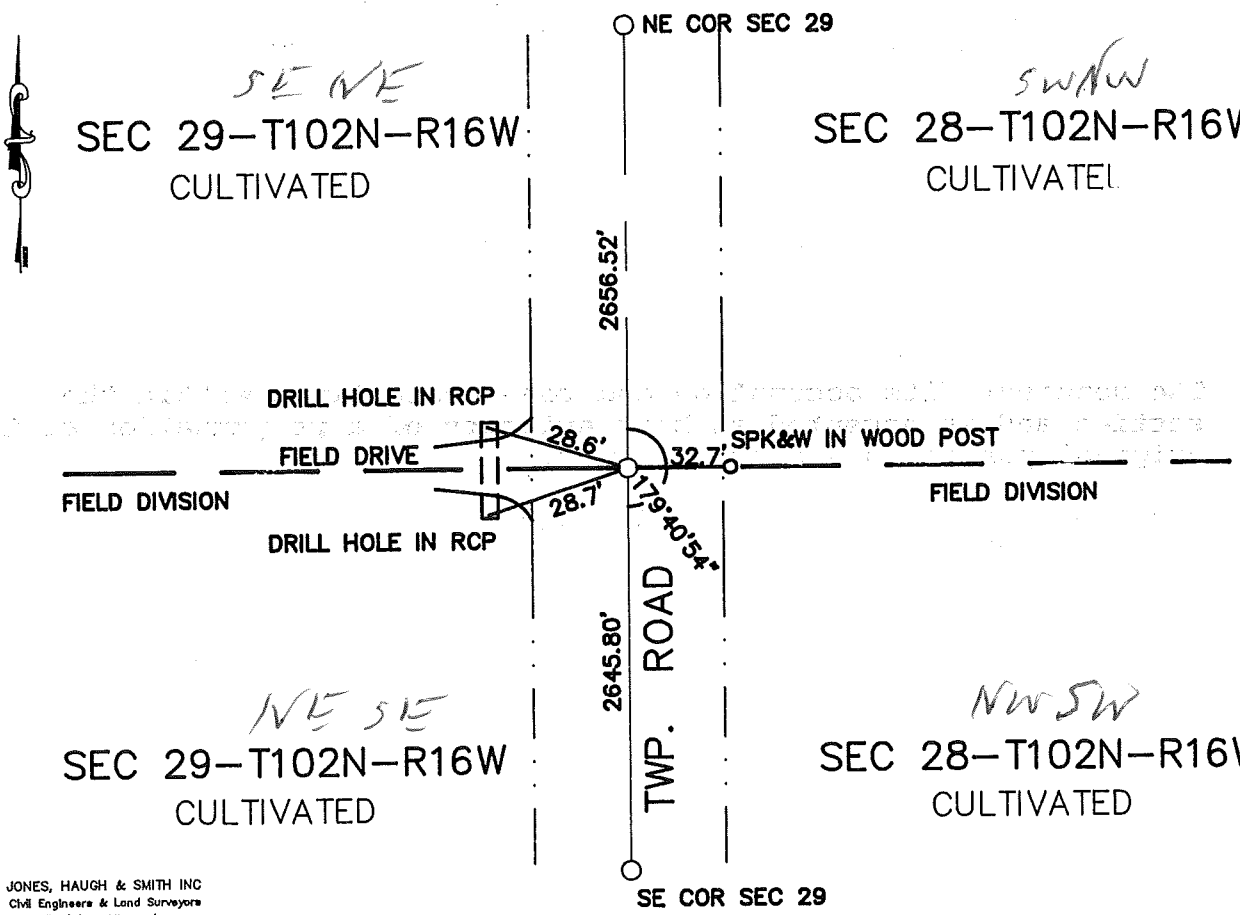

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 4-22-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 23 day of Apr A.D., 1997

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 452558

M.H.D. FORM NO. 2105

BOOK 95 PAGE 51 Book 95 Misc Page 51

E 1/4 Cor SEC 29-102-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of township road N-S and in line with field division E-W. Uncovered no evidence of original PLS corner. Placed a cast iron monument at the intersection of CL of roads and field division east and west.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 30, Township 102N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 04/26/1996 (DATE) found a 10"X18" FIELD STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 04/26/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

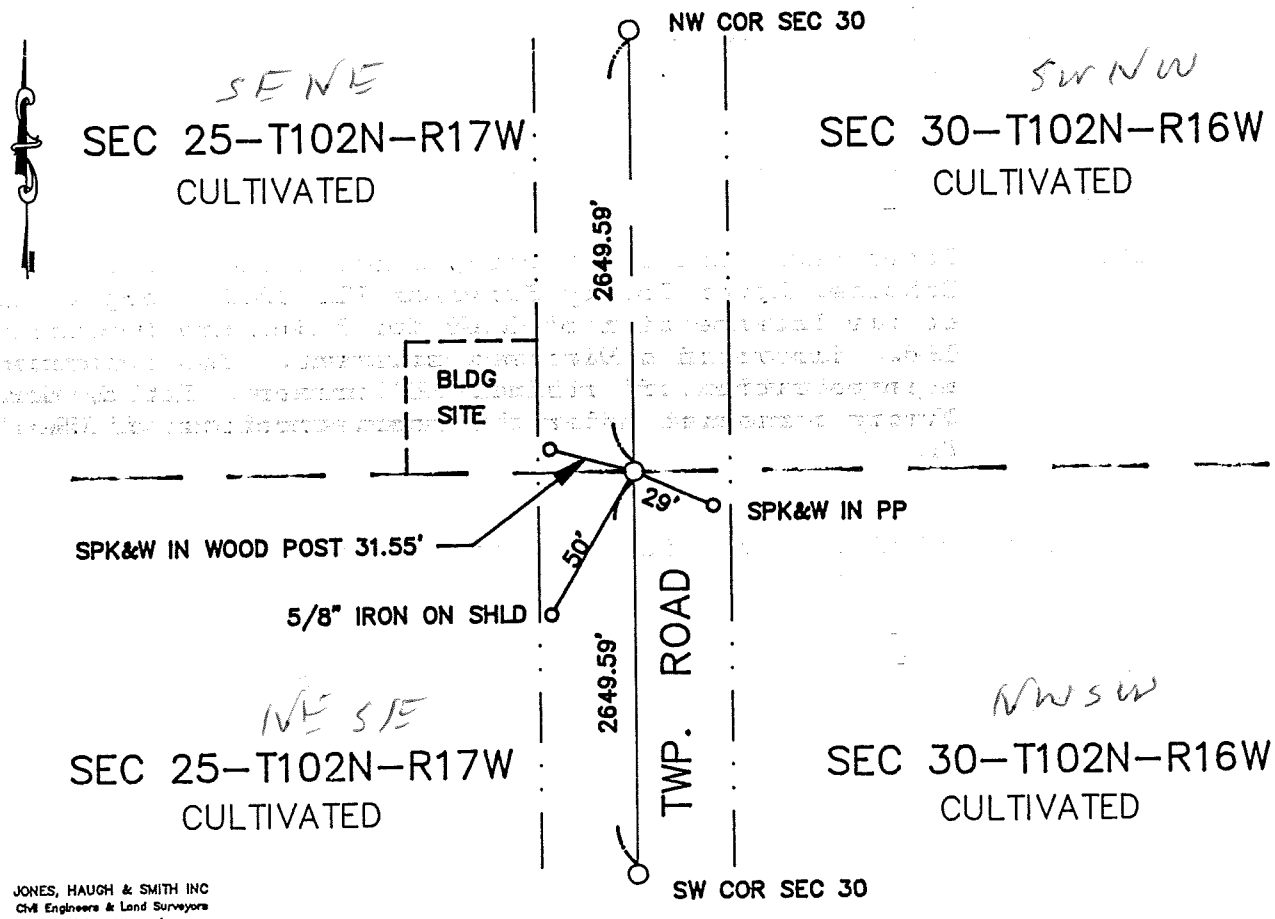

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-8-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P.M. on the 14 day of May A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M Davis, Deputy

DOCUMENT NO. 453077

M.H.D. FORM NO. 2105 BOOK 95 PAGE 191 Book 95 Misc Page 191

W 1/4 Cor SEC 39-102-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of township road N-S and in line with field division west. Uncovered a 10"x18" pointed stone 2.5' below road surface. Found no other evidence of original PLS corner. Accepted stone as a perpetuation of original PLS corner. Placed a 5/8" iron west side of stone found. Placed a cast iron monument on a straight line between the NW corner section 30 and the SW corner of section 30.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 30, Township 102N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 08/01/1996 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 08/01/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

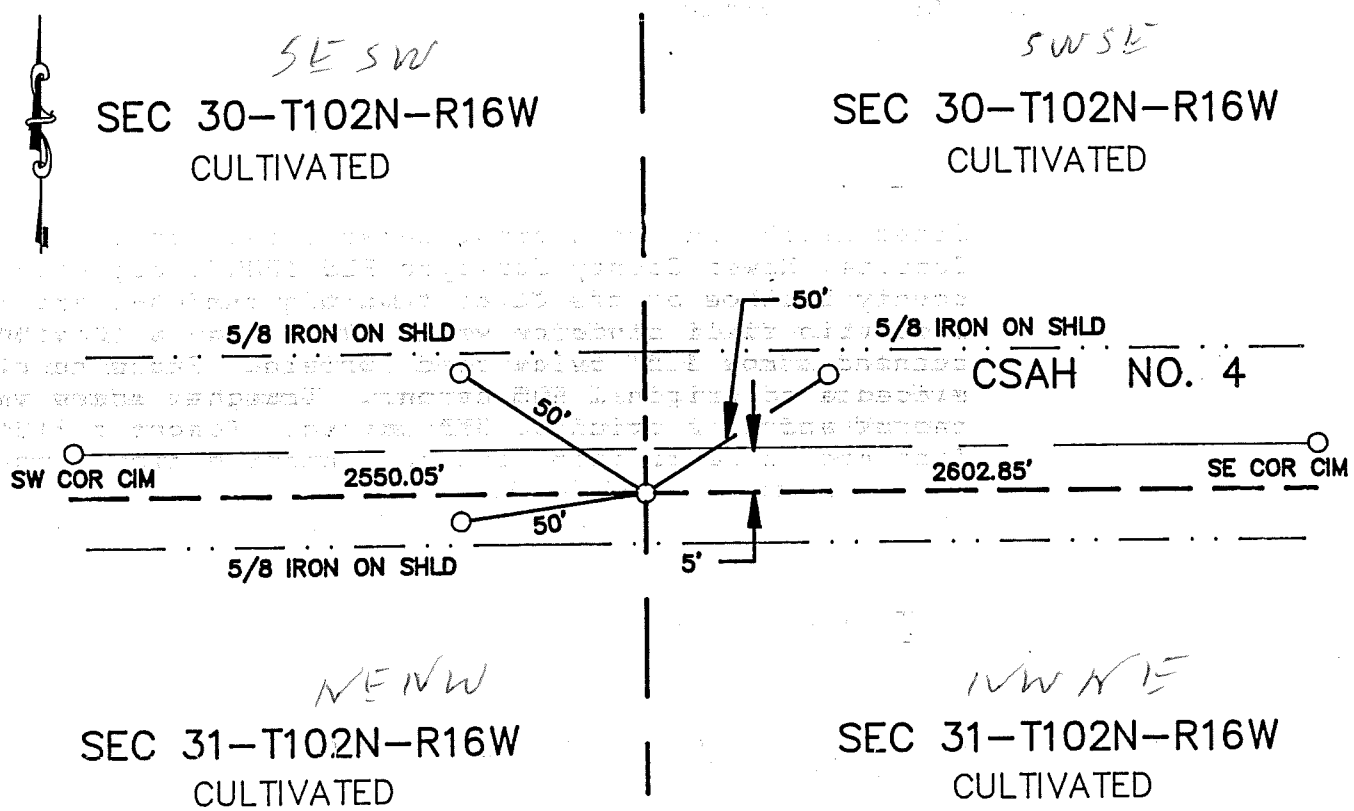

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-8-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P .M. on the 14 day of May A.D., 1997

COUNTY RECORDER Charles Engen

By Susan M. Laws, Deputy

DOCUMENT NO. 453078

M.H.D. FORM NO. 2105 BOOK 95 PAGE 193 Book 95 Misc Page 193

S 1/4 Cor SEC 30-102-16

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe 5' of south of CL of CSAH No. 4 at a proportioned distance between the SW and SE section corners. Found no evidence of original PLS corner. Placed a cast iron monument on a straight line between the SW and SE section corners at the proportional part distance in accordance with government chaining notes.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 30, Township 102N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 04/26/1996 (DATE) found a FIELD STONE 3' BELOW ROAD SURFACE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 04/26/1996 (DATE) placed a CAST IRON MONUMENT OVER FIELD STONE

SKETCH OF REFERENCE TIES

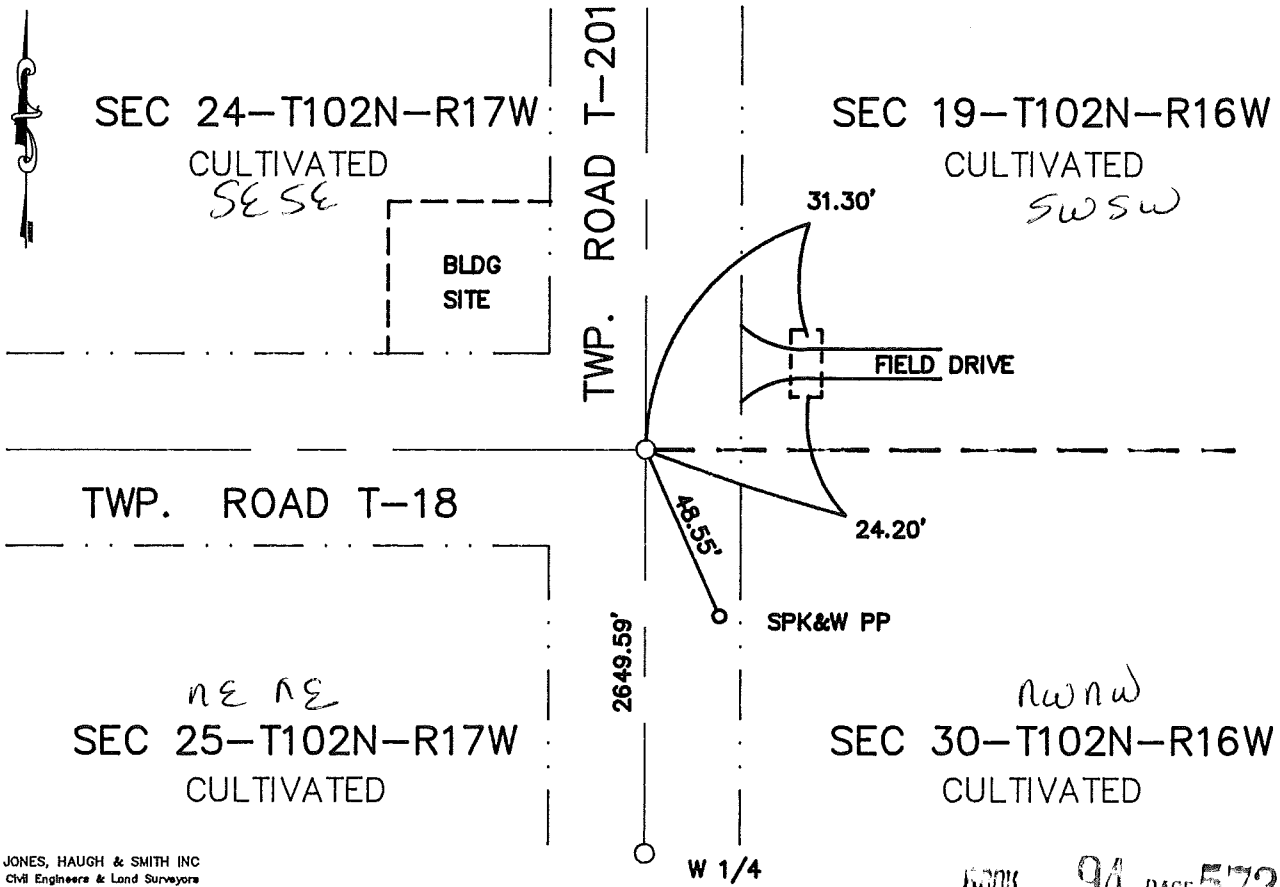

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 94 PAGE 572

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 4-4-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P.M. on the 9 day of Apr A.D., 1997

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 452261

M.H.D. FORM NO. 2105

Book 94 Misc Page 572

NW Cor SEC 30-102-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the intersection of township road west and township road N-S. Uncovered a 1.5'x2.0' field stone 3.0' below the road surface. Accepted the stone as a perpetuation of original PLS corner. Placed a 5/8" iron capped #13807 on the north side of the stone. Placed a cast iron monument over stone found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 30, Township 102N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 08/15/1996 (DATE) found a EXISTING SOUTH FENCE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 08/15/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

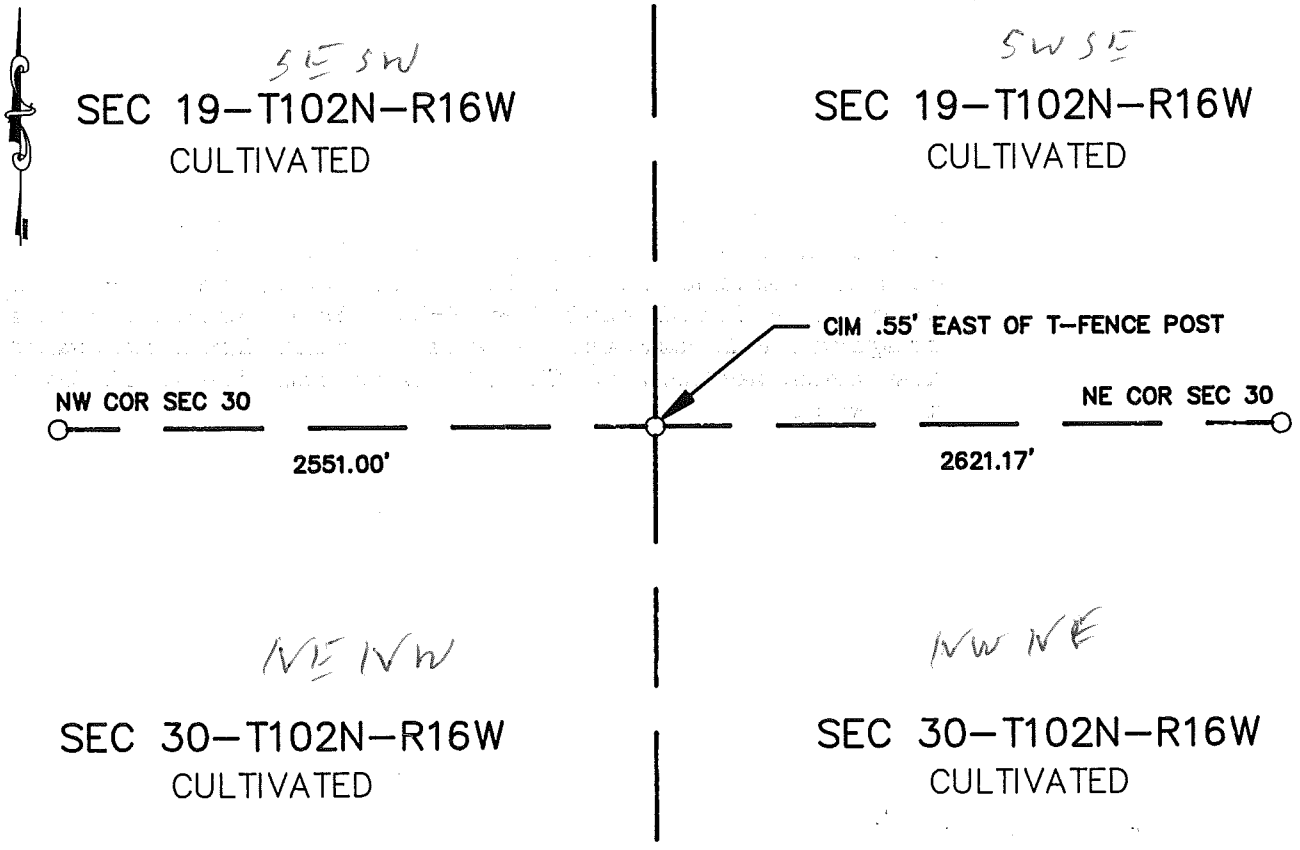

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 4-22-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 23 day of Apr A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 452559

M.H.D. FORM NO. 2105 BOOK 95 PAGE 53 Book 95 Misc Page 53

N 1/4 Cor SEC 30-102-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, placed a cast iron monument on a straight line between the NW and the NE section corners and in line with existing fence to the south.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 30, Township 102N Range 16W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-25-94 (DATE) found a NO EVIDENCE OF PLS CORNER

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-25-94 (DATE) placed a CIM ON C/L; FENCE E-W; 1/16TH LINE FENCE N.

SKETCH OF REFERENCE TIES

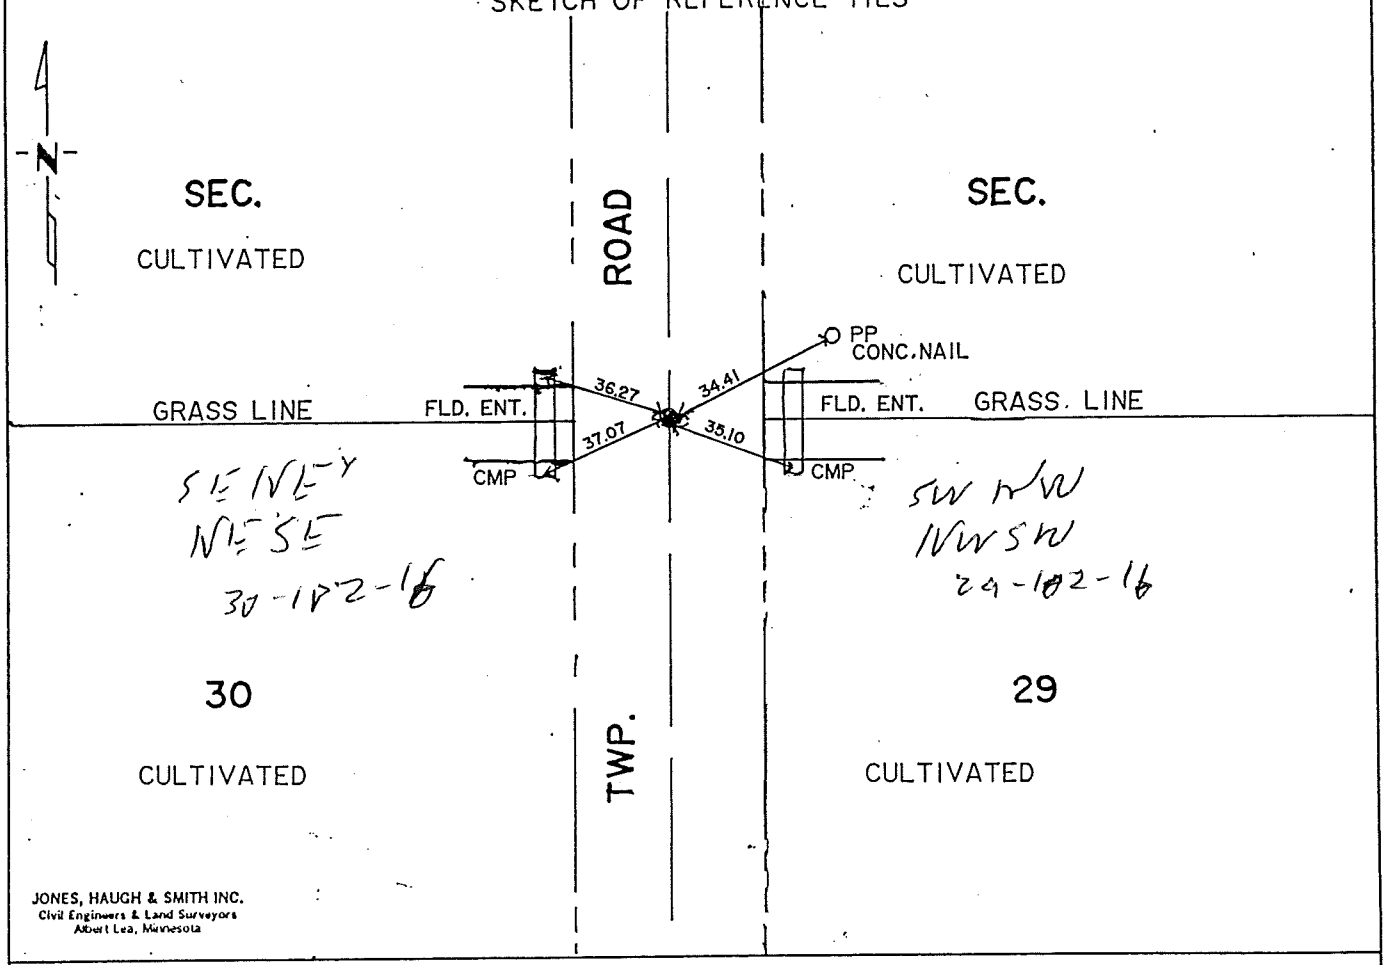

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-7-94

Registration No. 13907

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A .M. on the 11 day of July A.D., 1994

COUNTY RECORDER Charles Engar

By Marlene Martin, Deputy

DOCUMENT NO. 430566

Book 84 Misc Pg 1

M.H.D. FORM NO. 2105 BOOK 84 PAGE 1

STATEMENT OF EVIDENCE

E 1/4 cor 30-102-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1854. The government notes show this corner was marked with a wood post and charred stake and a trench with a mound of earth.

The following information was obtained to support evidence of the original public land survey corner or a perpetuation thereof:

1891 Clausen field notes indicate a stone at the corner.

1994 Jones, Haugh & Smith Inc personnel under the direction of John H. Schulte IV, RLS 13807, excavated with a backhoe a trench in the area of the corner. No evidence of the original public land survey corner was recovered.

The fence lines east and west and the township road centerline is accepted as the best available evidence of perpetuation of the original public land survey corner.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 30, Township 102N Range 16W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 5-25 94 (DATE) found a NO EVIDENCE OF PLS CORNER

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-25-94 (DATE) placed a CAST IRON MONUMENT ON C/L

SKETCH OF REFERENCE TIES

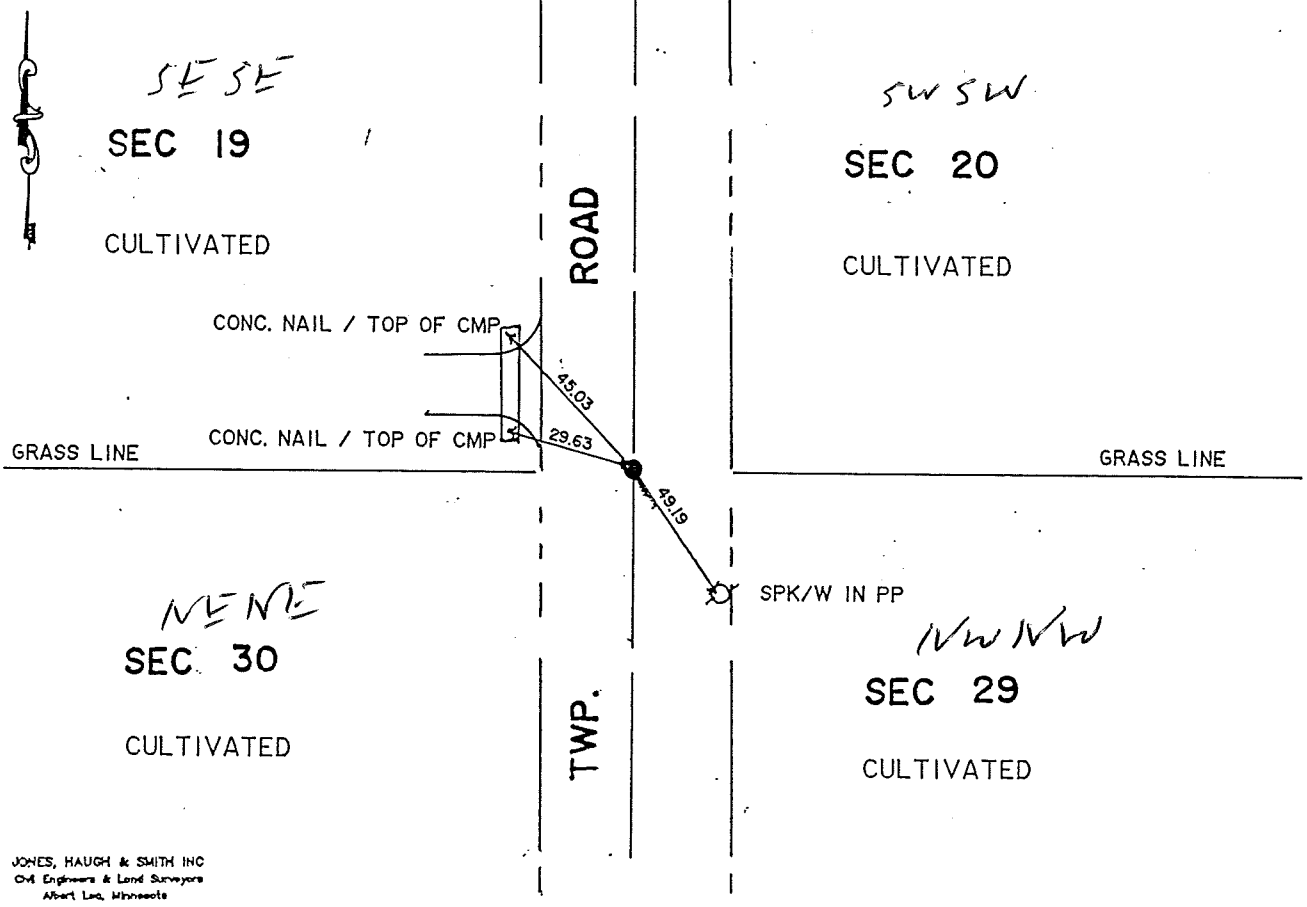

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-7-94

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A.M. on the 11 day of July A.D., 1994

COUNTY RECORDER Charles Engen

By Marlene Martin, Deputy

DOCUMENT NO. 430562

Book 84 Misc Pg 3

M.H.D. FORM NO. 2105

BOOK 84 PAGE 3

STATEMENT OF EVIDENCE

NE cor 30-102-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show this corner was marked with a wood post and charred stake and a trench with a mound of earth.

1891 Clausen field notes indicate a stone at the corner.

1994 Jones, Haugh & Smith Inc personnel under the direction of John H. Schulte IV, RLS 13807, excavated with a backhoe a trench in the area of the corner. No evidence of the original public land survey corner was recovered.

Set cast iron monument on centerline intersection of north-south township road and field division east and west. This location fits existing 1/16th line fences to north and south of corner.

The location of the township road and the fence lines east and west were accepted as the best remaining evidence of perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 30, Township 102N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 01/26/1996 (DATE) found a ALUMINUM MONUMENT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 01/26/1996 (DATE) placed a LEFT MONUMENT AS FOUND AND RETIED

SKETCH OF REFERENCE TIES

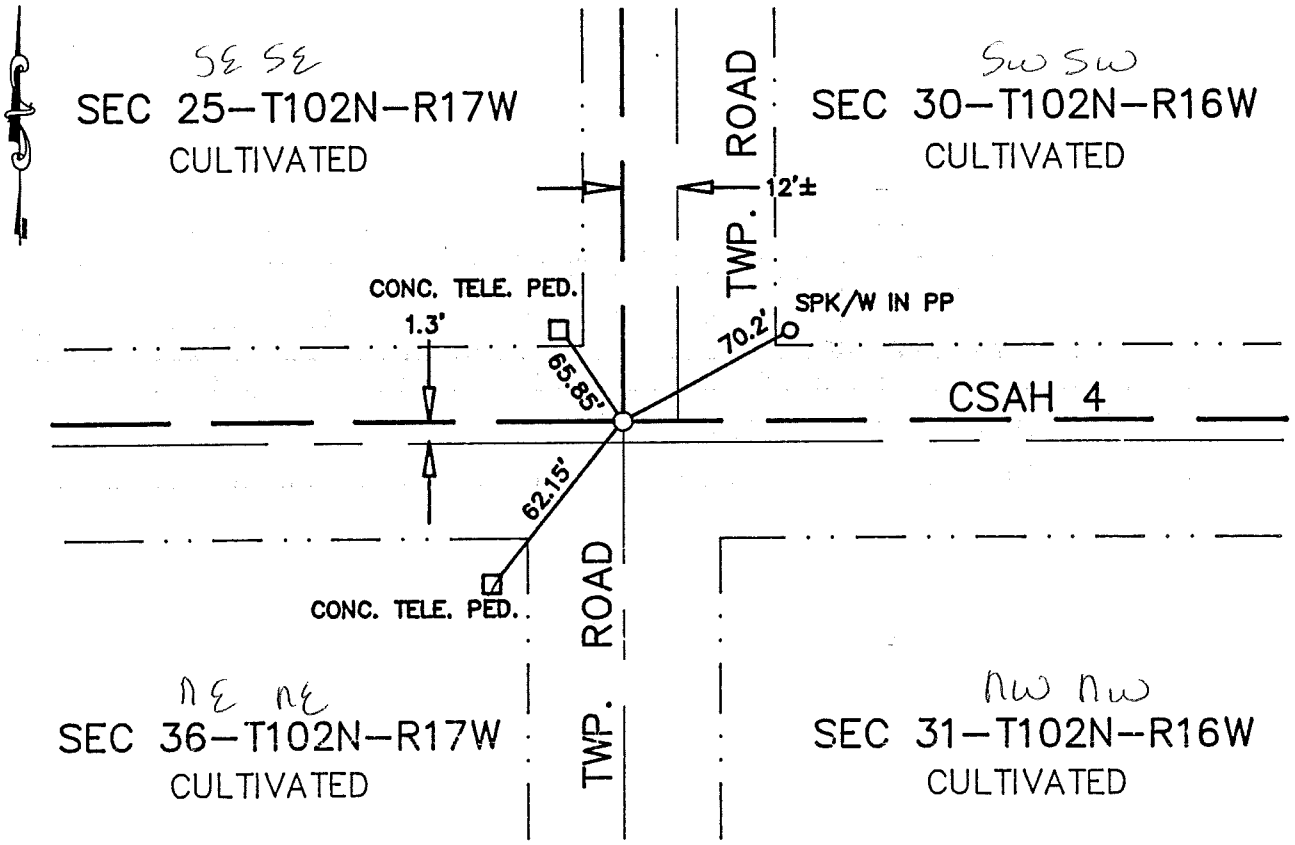

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page. BOOK 91 PAGE 562

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-19-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 22 day of July A.D., 1996

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 446550

M.H.D. FORM NO. 2105

Book 91 Misc Page 562

SW Cor SEC 30-102-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

Mower County Highway Department records show and in place monument with ties.

1973 Jones Haugh and Smith crew located corner using Mower County Highway Department ties.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, located corner at the CL of C.S.A.H. No. 4 and the CL of township road south and found an aluminum monument which checked with 1973 ties.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 30, Township 102N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 04/26/1996 (DATE) found a FIELD STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 04/26/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

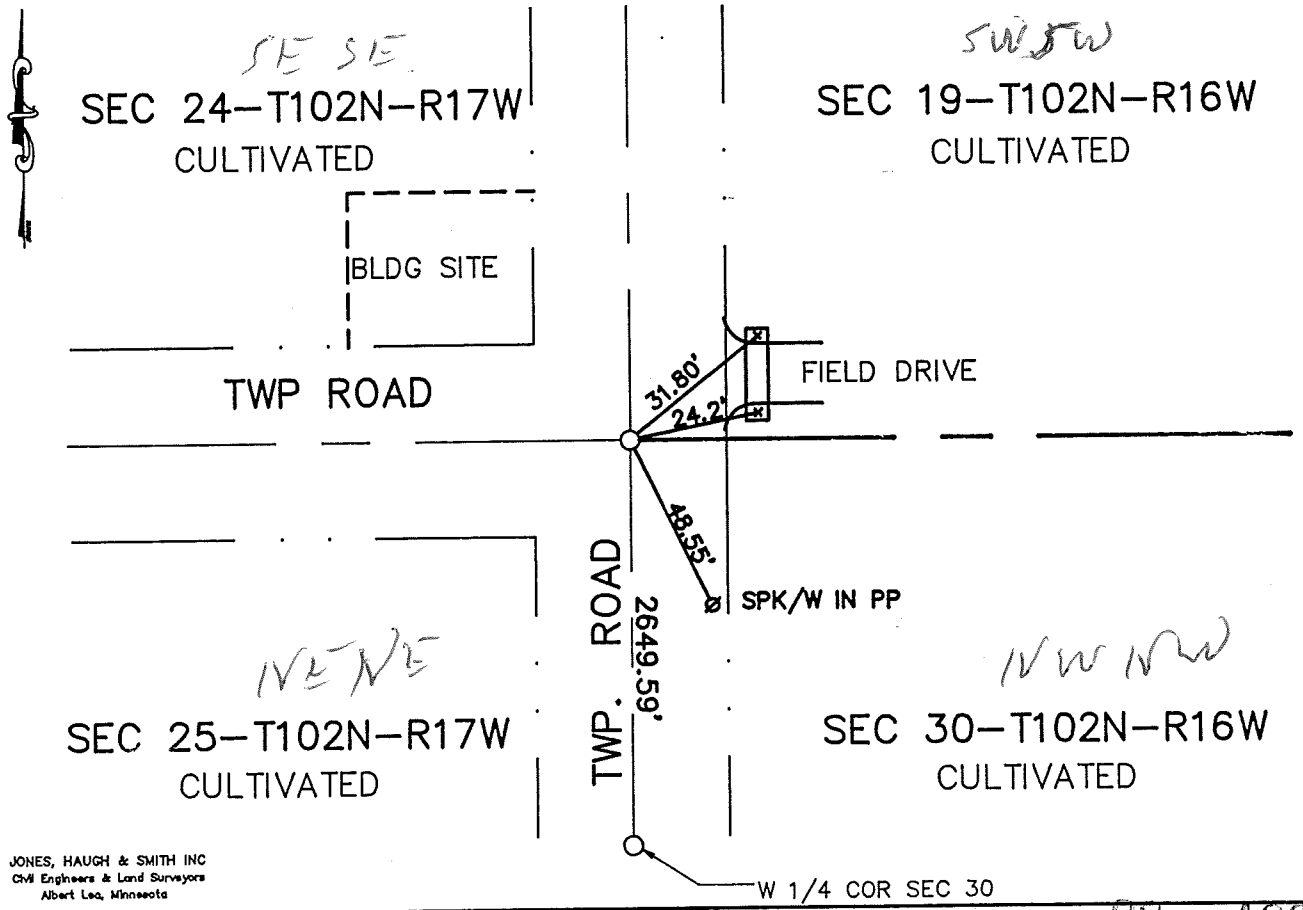

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page. BOOK 96 PAGE 108

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-4-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 6 day of Aug A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 455218

M.H.D. FORM NO. 2105

Book 96 Misc Page 108

NW Cor SEC 30-102-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe on centerline of township road N-S and centerline of township road to west. Uncovered a 1.5' x 2.0' field stone 3.0' below road surface. Found no other evidence of PLS corner. Accepted field stone as as true PLS corner. Stone fit centerline of township road N-S and township road west. Set capped 5/8" iron on north side of stone cap no. 13807. Set 5/8" x 16" iron with cast iron monument over stone found 0.40' below road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 31, Township 102N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/12/2004 (DATE) found a WOOD POST

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/12/2004 (DATE) placed a 5/8"X16" REBAR WITH CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

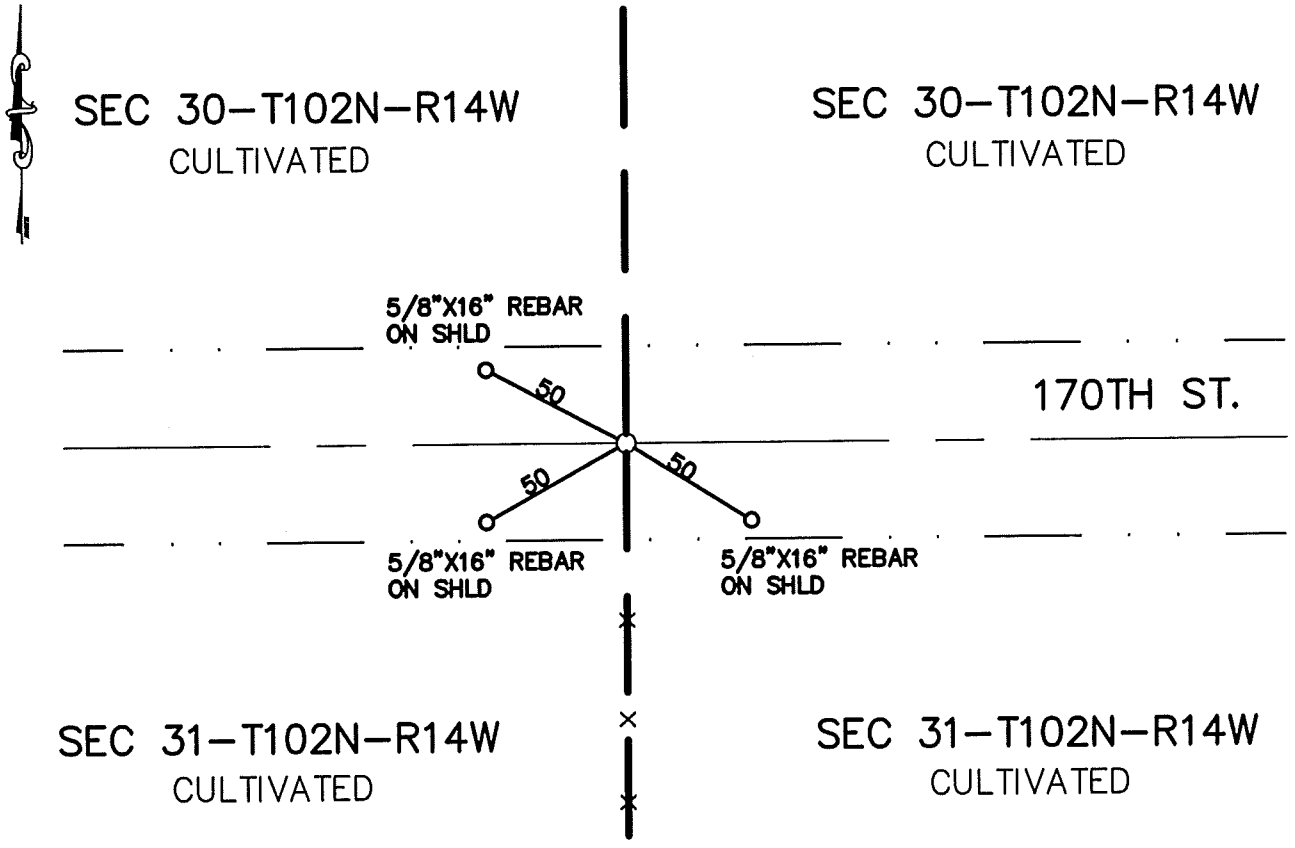

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 8-30-04 (DATE)

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

N 1/4 Corner Section 31-T102N-R14W

Deputy Surveyor John Taylor of the U.S. General Land Office originally established this corner in 1853 . The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Department
Mower County Recorder
Tucker Land Surveying

2004 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with Boe Brothers backhoe at centerline of township road east-west and in line with line fence south. Uncovered a wood post with two large spikes in top of said post. Post is 1.5' below old road bed. Placed a 5/8"x16" rebar capped #13807 on the west of the post. Placed a 5/8"x16" rebar with cast iron monument above post 0.6' below road surface.

The monument is in agreement with the record and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 31, Township 102N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/14/2004 (DATE) found a ALUMINUM MONUMENT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On – (DATE) placed a –

SKETCH OF REFERENCE TIES

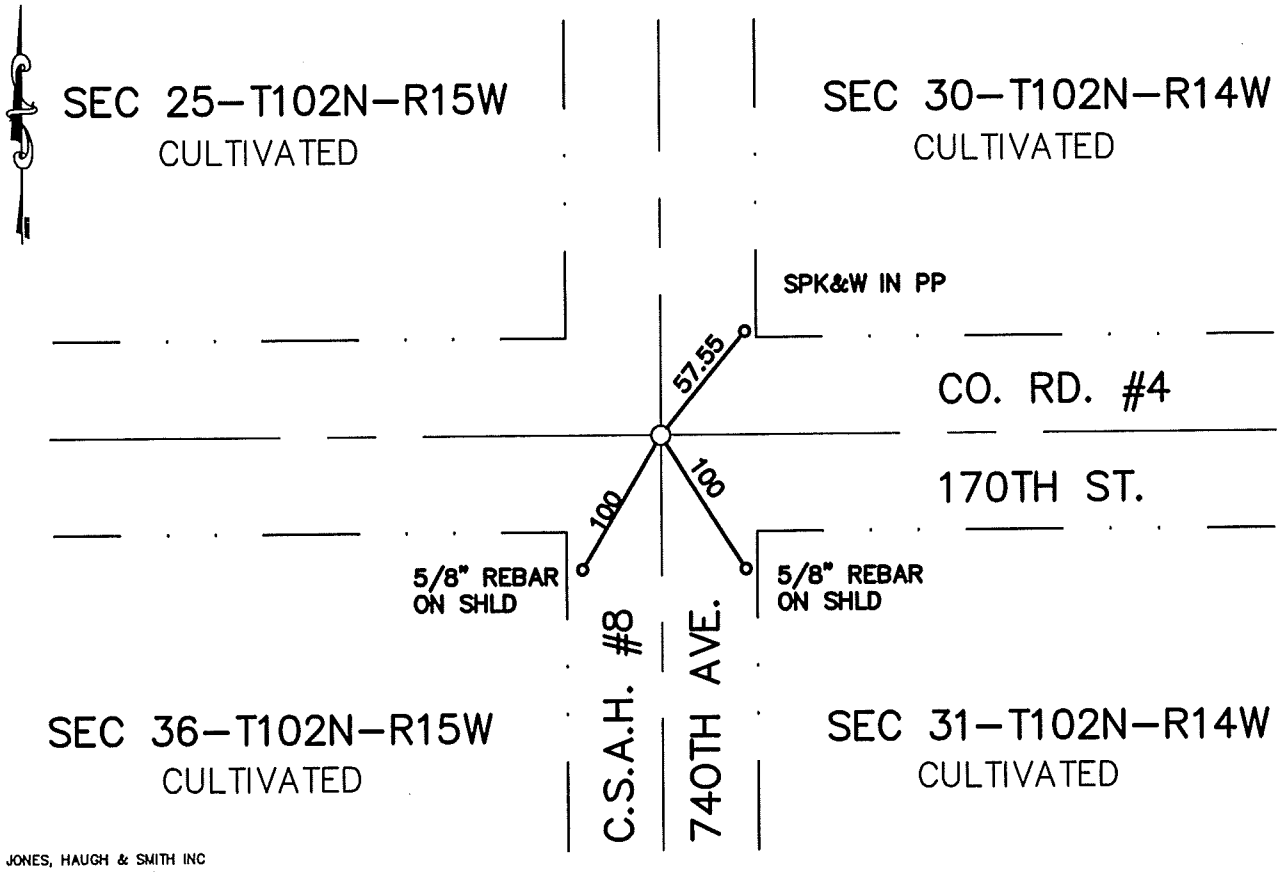

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-30-04

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

NW Corner Section 31-T102N-R14W

Deputy Surveyor John Ball of the U.S. General Land Office originally established this corner in 1853 . The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Department
Mower County Recorder
Tucker Land Surveying

Mower County Records state that the section corner is at station 397+55.0.
Ties to corner are:

38.0 NE to rock
40.1 NW to cottonwood
43.7 SW to fence post

2004 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand at the signal from locator and uncovered an aluminum monument. All previous ties were destroyed. Took new ties.

The monument is in agreement with the record and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 31, Township 102N Range 16W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-25-94 (DATE) found a CONC. MON ON 3/4 ROD / CONC. TILE MON OVERPOINTED STONE LEFT STONE INPLACE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-25-94 (DATE) placed a ROD ON S. SIDE OF STONE / CIM OVER STONE/

SKETCH OF REFERENCE TIES

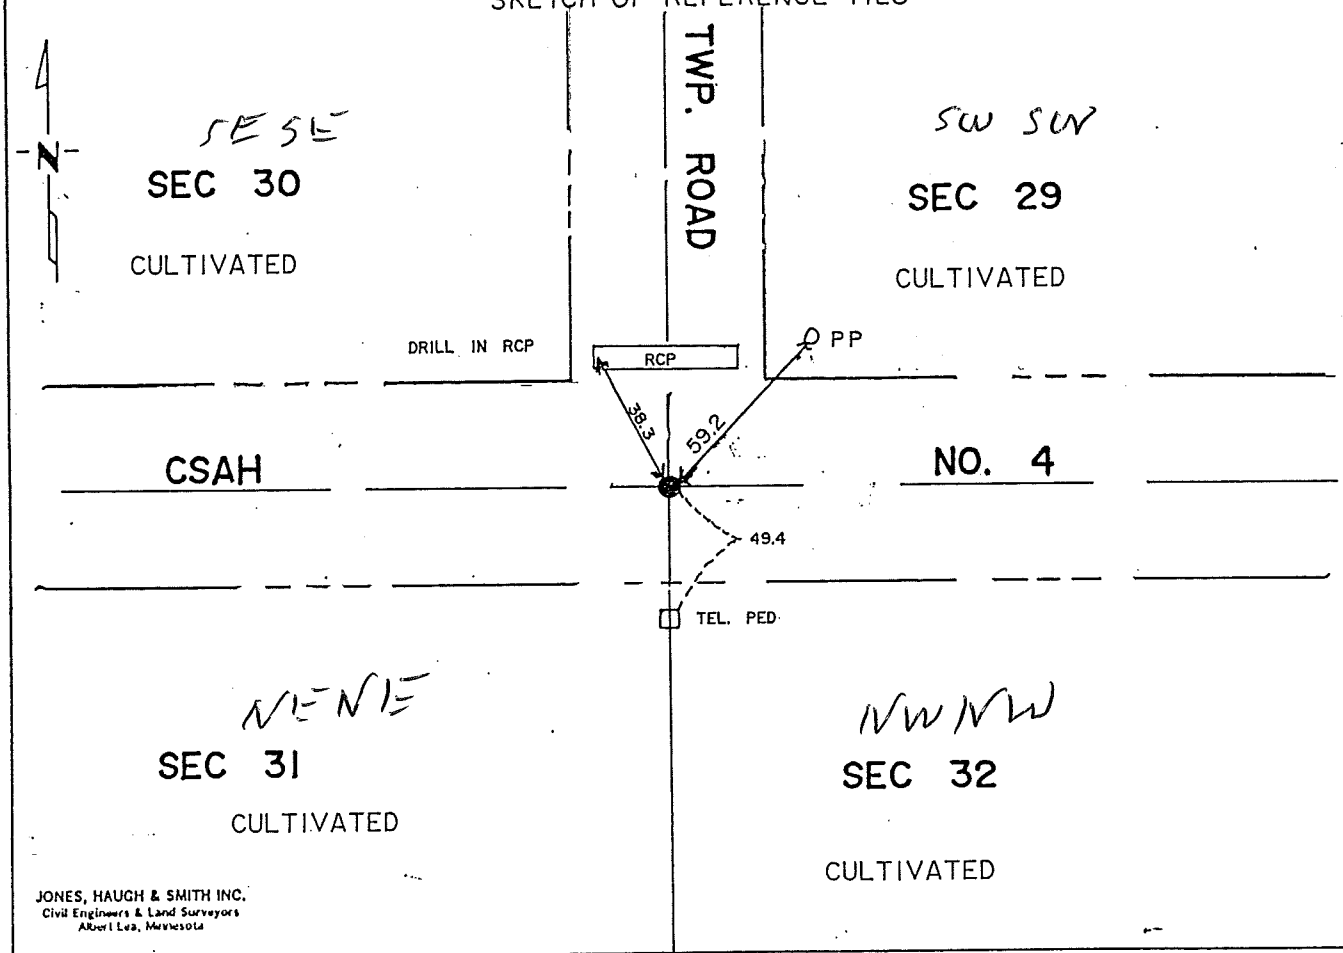

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-7-94

Registration No. 13607

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A .M. on the 11 day of July A.D., 1994

COUNTY RECORDER Charles Enger

By Marlene Manter, Deputy

DOCUMENT NO. 430568

Book 84 Misc Pg 5

MHD FORM NO. 2105

BOOK 84 PAGE 5

STATEMENT OF EVIDENCE

NE cor 31-102-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show this corner was marked with a wood post and charred stake and a trench with a mound of earth.

The following were contacted for section corner information:
Freeborn County Engineering Department

The following information was obtained to support evidence of the original public land survey corner or a perpetuation thereof:

1891 Clausen field notes indicate a stone at the corner.

1963 Mower County Grading Plans show concrete monument over stone.

1994 Jones, Haugh & Smith Inc personnel under the direction of John H. Schulte IV, RLS 13807, excavated with a backhoe in the area of the corner and found the concrete monument over the stone.

The stone is accepted as marking the location of the original public land survey corner.

BOOK 84 PAGE 6

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. P 125 "S"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 33, Township 102N Range 16W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 10-13-92 (DATE) found a NO EVIDENCE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10-13-92 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

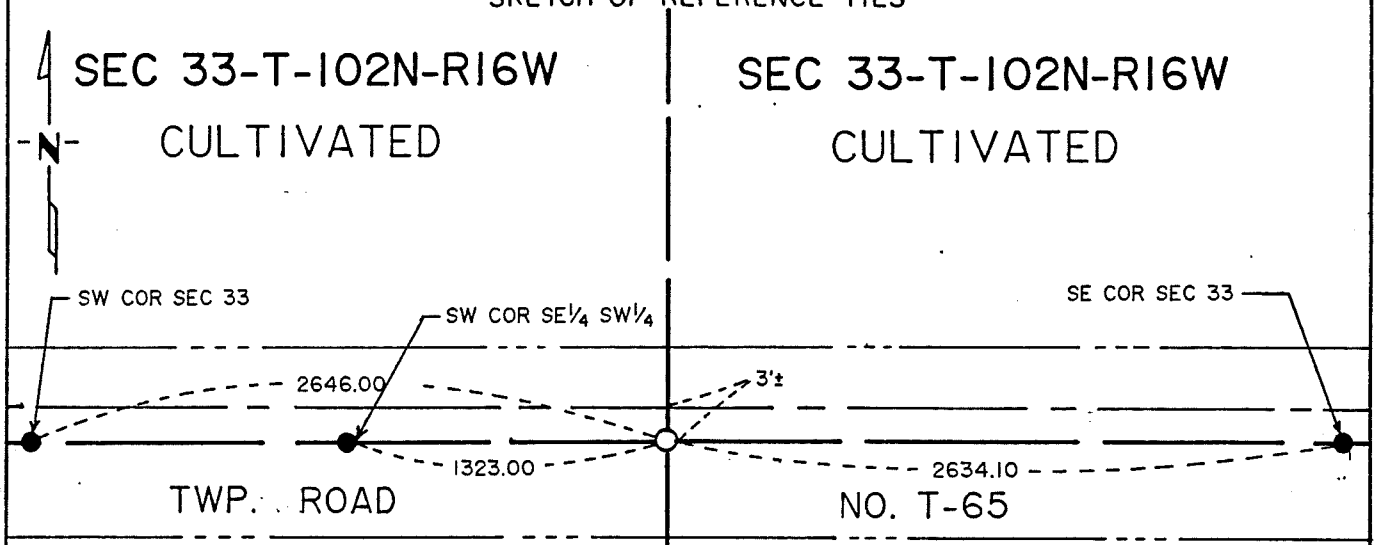

SEC 4-T-101N-RI6W
CULTIVATED

SEC 4-T-101N-RI6W
CULTIVATED

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 12-16-92 DATE

Registration No. 13007

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

S 1/4 corner Sec 33-102-16

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following evidence was obtained to support a perpetuation of the original public land survey corner.

1886 Clausen field notes indicate a government post.

1992 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, dug a 6'x8'x4' deep hole and found nothing. Set cast iron monument on straight line between southeast and southwest corners and in line with fence line south. This position fits existing 1/16 line fences along the south line of the section.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. P 125 "A"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 33, Township 102N Range 16W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 10-13-92 (DATE) found a 3/4Ø IRON ALUM. CAPPED MOWER CO. HWY. DEPT OVER A 6" CONCRETE MONUMENT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10-13-92 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

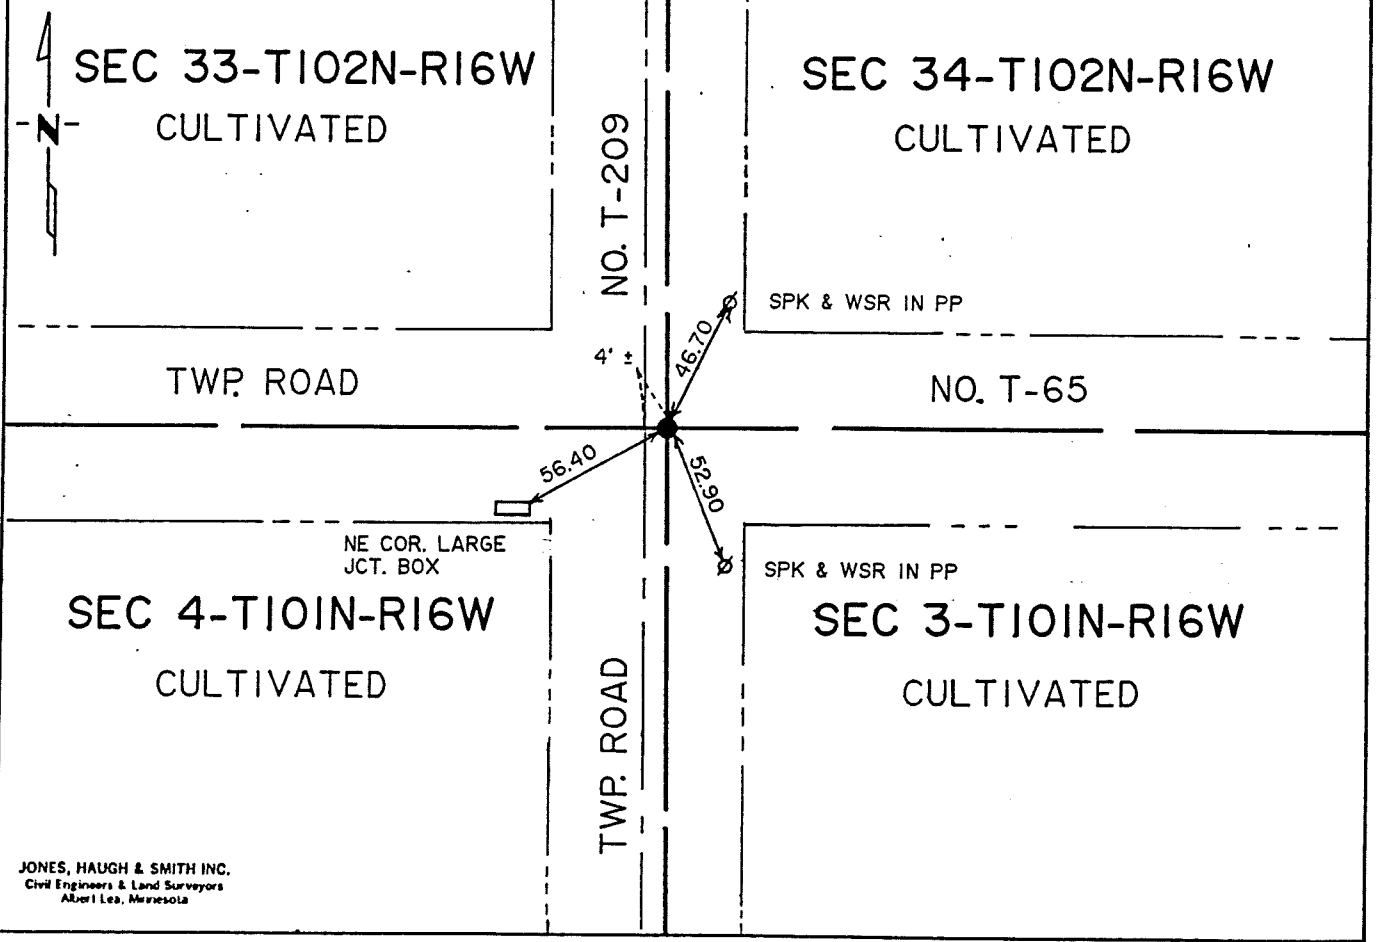

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 12-16-92 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SE corner Sec 33-102-16

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench. The following ties were taken:

8" Black Oak	N 1 1/2° E	262 links (172.92 ft)
6" Burr Oak	S 38 3/4° E	242 links (159.72 ft)
8" Black Oak	S 46 1/2° W	80 links (128.00 ft)

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following evidence was obtained to support a perpetuation of the original public land survey corner.

1886 Clausen field notes indicate a stone at the SW corner Section 34-102-16.

1992 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, dug with County backhoe a 4'x6'x3' deep hole. Found a 3/4" diameter iron alum. capped "Mower Co Hwy Dept" over a 6" diameter concrete monument, 3 feet deep in virgin soil, four feet east of centerline of Township Road No. T-209. Set cast iron monument at road surface over concrete monument.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. P 123 "B," P124 "B" P125 "B"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 33, Township 102N Range 16W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 10-13-92 (DATE) found a MOWER CO. HWY. DEPT./ ALUM. MONUMENT AND UNCOVERED LARGE POINTED FIELD STONE PIECES CLAY TILE AROUND STONE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10-13-92 (DATE) placed a _____

SKETCH OF REFERENCE TIES

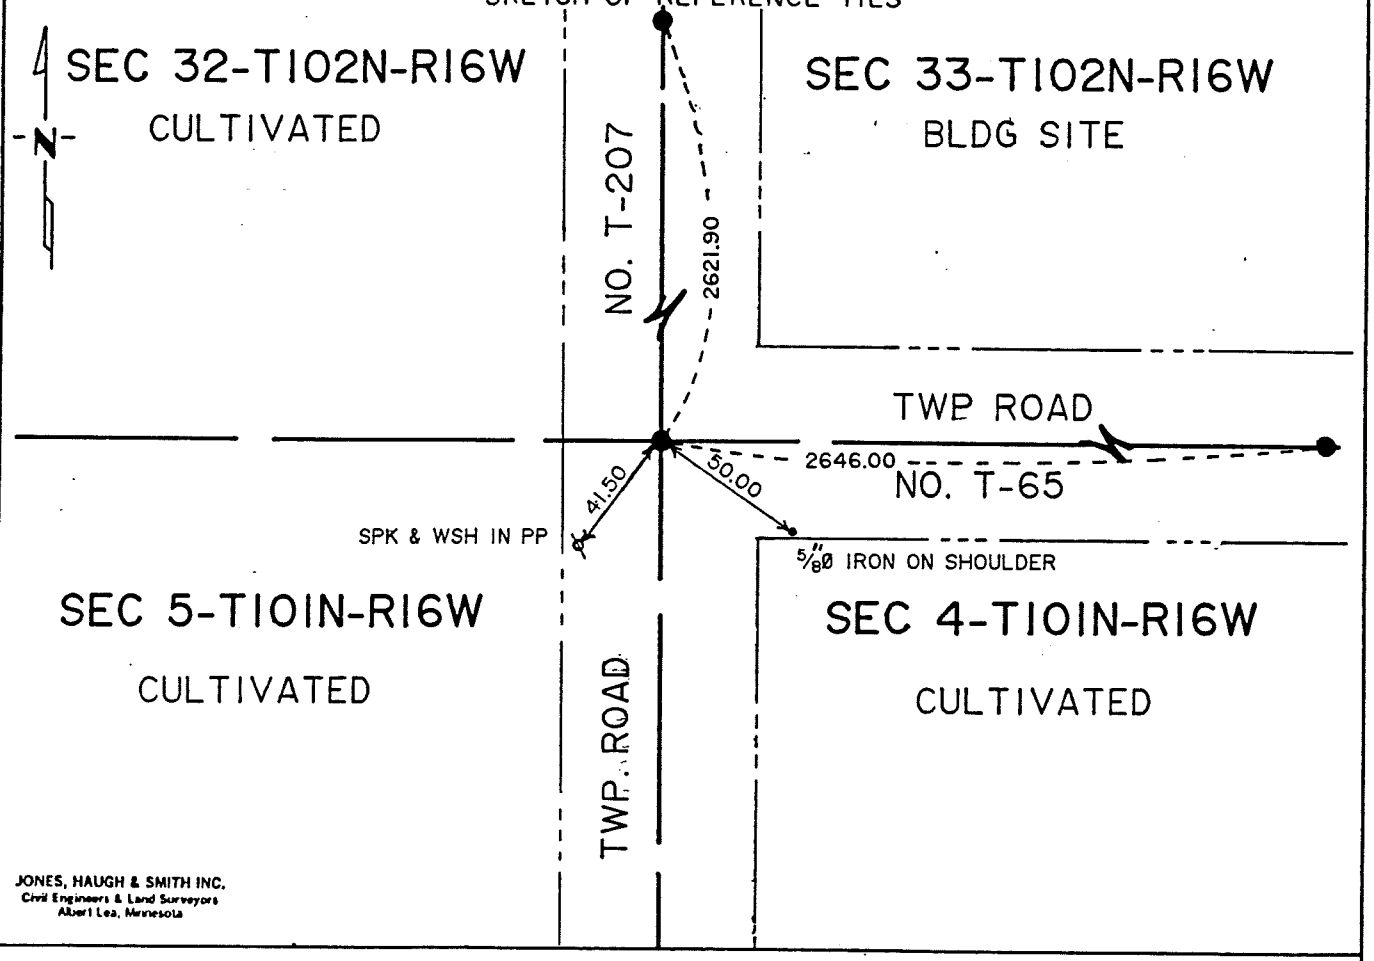

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ (SIGNATURE) 12-16-92 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Sec 33-102-16

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following evidence was obtained to support a perpetuation of the original public land survey corner.

1886 Clausen field notes indicates a post.

Book A in the Office of Mower County Highway Department indicates a section corner rock at the SE corner Section 32. The following ties were taken:
WNW 27.7' to cor fence post
ENE 48.5' to 2nd willow
SE 77.2' to cor fence post
WSW 44.7' to 10' Ash

1992 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, dug at location of alum. monument marked "Mower Co Hwy Dept". Found a large pointed field stone with pieces of clay tile around stone three feet deep in virgin soil. Left monuments as found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. P 123 (E), 125 (K)

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 33, Township 102N Range 16W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 10-13-92 (DATE) found a MOWER CO. HWY. DEPT. ALUM. MONUMENT AND 6"Ø CONCRETE MONUMENT 2.50' BELOW ROAD SURFACE

■ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10-13-92 (DATE) placed a NOTHING

SKETCH OF REFERENCE TIES

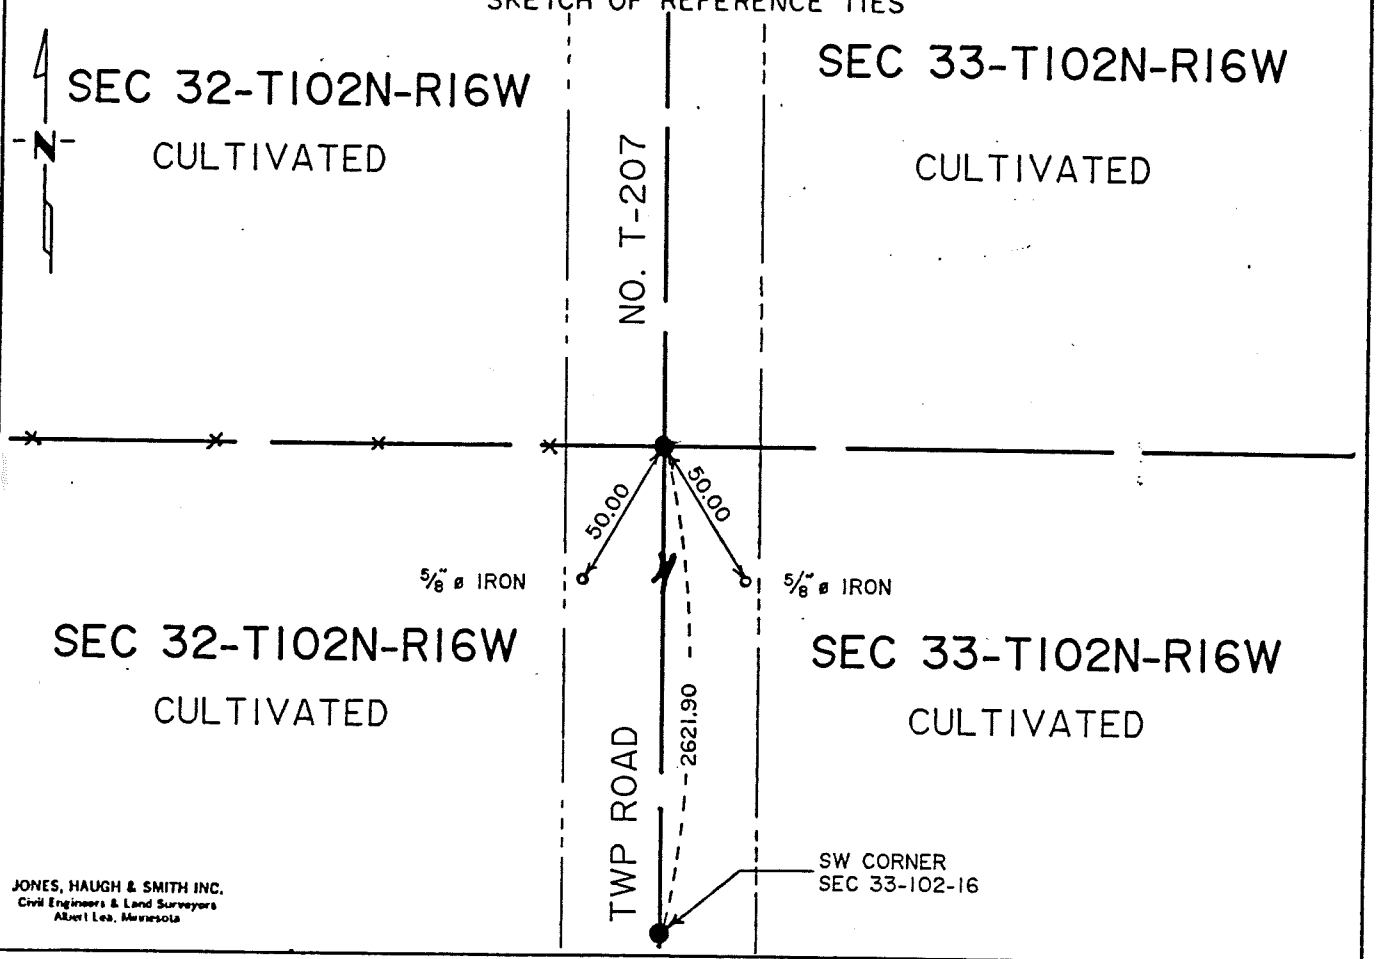

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 12-16-92 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Sec 33-102-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following evidence was obtained to support a perpetuation of the original public land survey corner.

1886 Clausen field notes indicate a post inplace.

Book A in the Office of Mower County Highway Department indicates a concrete monument inplace at the split of the northeast corner of Section 32 and the southeast corner of Section 32. Measured distance of 2621.45 feet to E 1/4 corner of Section 32.

1992 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, dug with County backhoe on centerline of Township Road T-207. Found a alum. monument marked "Mower Co Hwy Dept". 2621.90 feet north of the southwest corner continued digging and found 6" diameter concrete monument 2.5 feet deep under the alum. monument. Left both monuments inplace and agrees with past records recorded in Book 'A'.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. p106 "I"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 36, Township 102N Range 16W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 10-12-92 (DATE) found a CAST IRON MOUNUMENT OVER POINTED FIELD STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10-12-92 (DATE) placed a RESET CAST IRON MOUNUMENT

SKETCH OF REFERENCE TIES

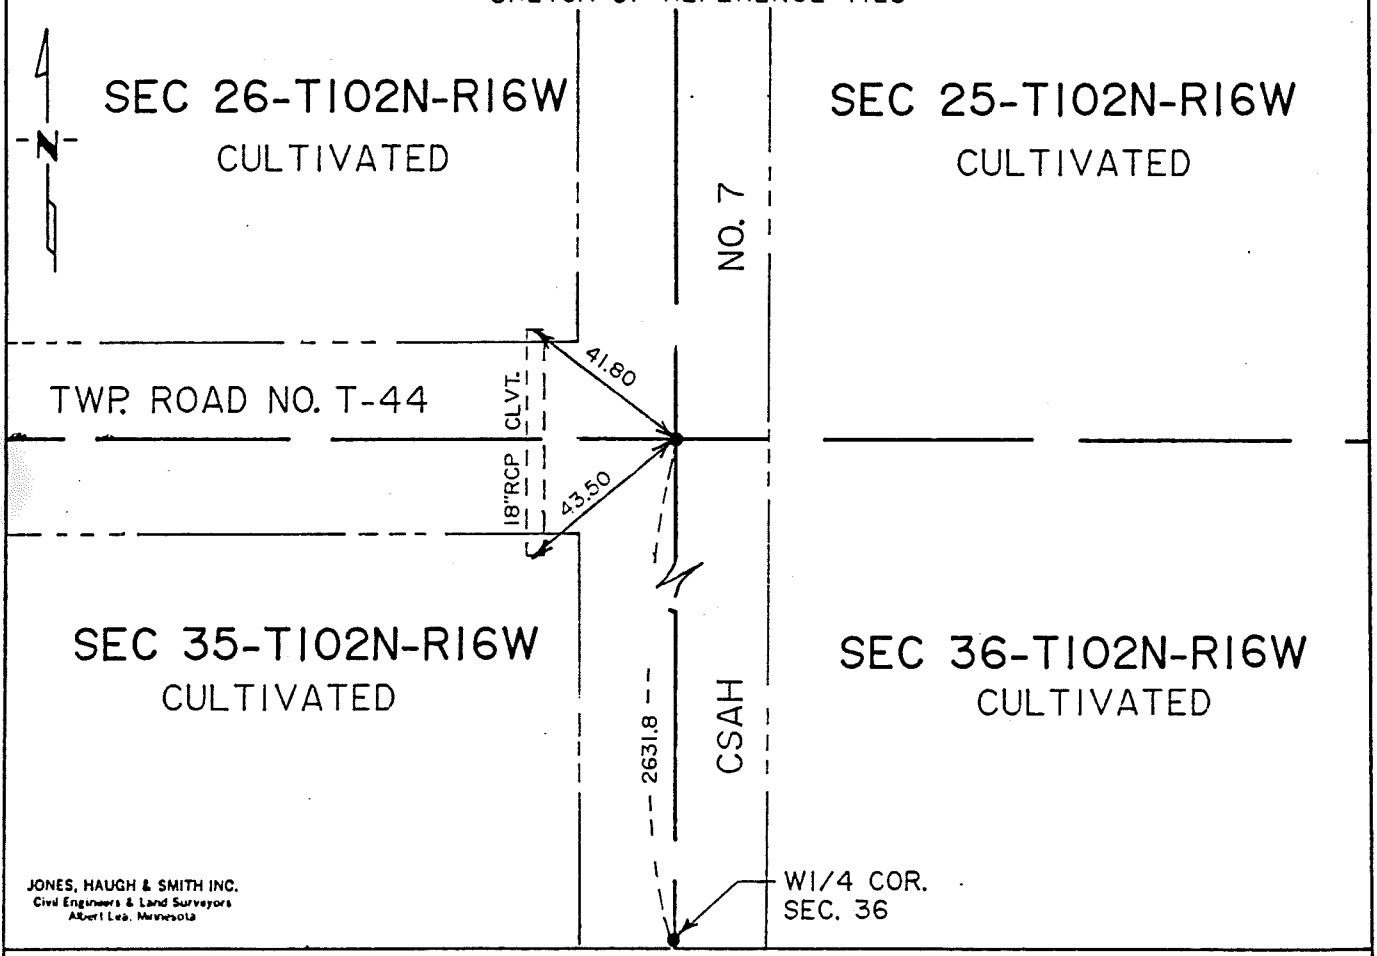

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 12-16-92 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Sec 36-102-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following evidence was obtained to support a perpetuation of the original public land survey corner.

1886 Clausen field notes indicate a government post at the northeast corner of Section 35-102-16.

1954 Book A in the Office of Mower County Highway Department indicates a 1/2" diameter iron over stone. The following ties were taken:
NW 69.9' to tele pole
SW 37.3' to SE corner S.C. apron
E 50.4' to straight fence post
SE 36.6' to SW corner S.C. apron

1992 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, dug with County backhoe on centerline centerline of CSAH No. 7 and Township Road T-44. Found a harrison cast iron monument over a pointed field stone 2.5 feet deep. Set cast iron monument over stone, one foot below road surface.

The monument found fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. P106 "N"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 36, Township 102N Range 16W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 10-12-92 (DATE) found a NO EVIDENCE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10-12-92 (DATE) placed a CAST IRON MOUNUMENT

SKETCH OF REFERENCE TIES

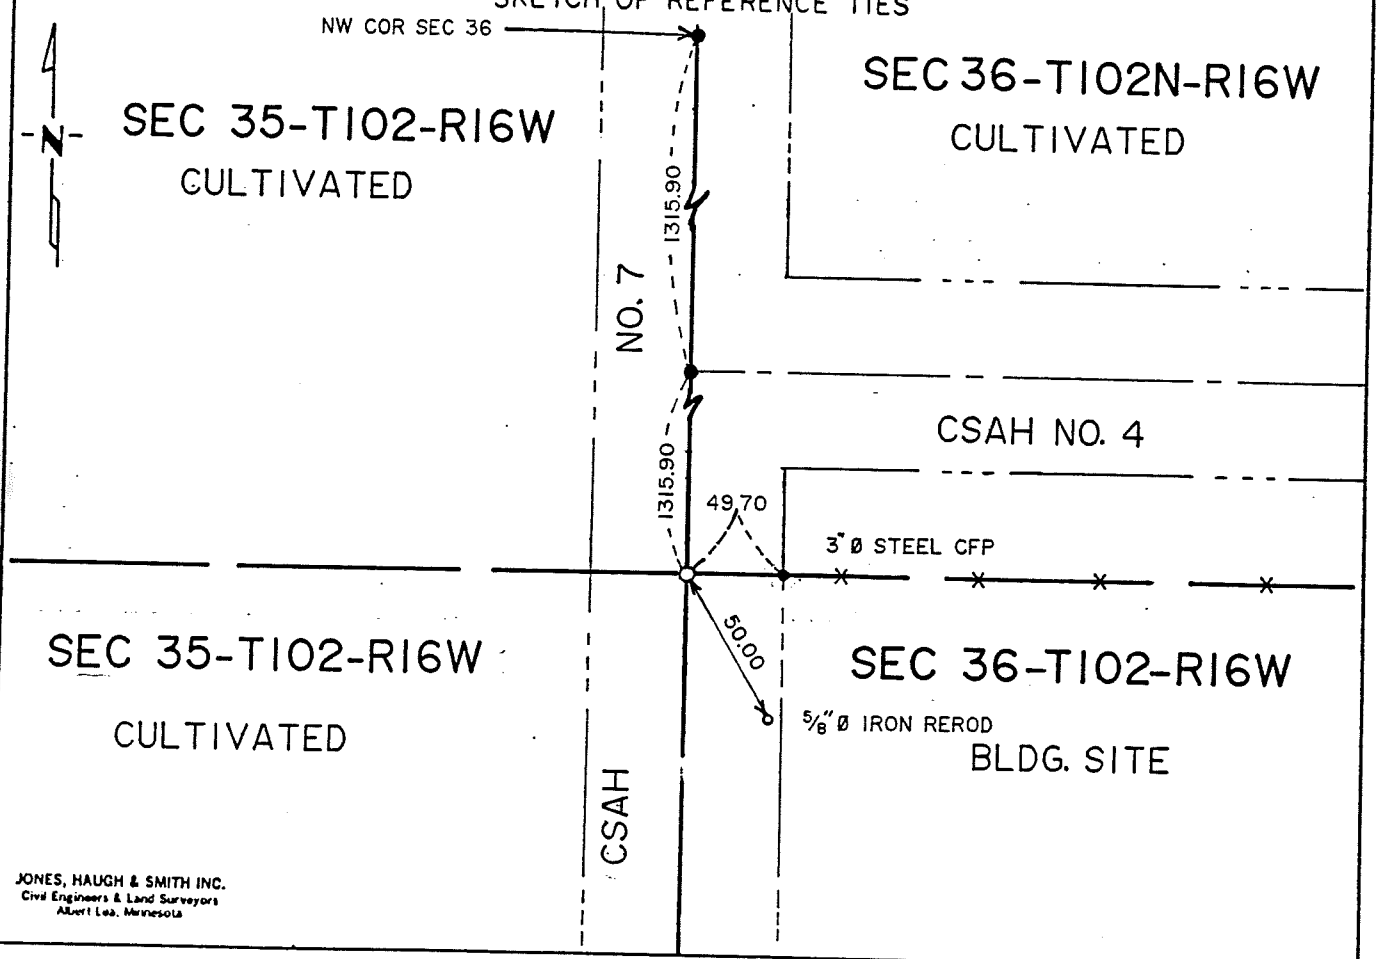

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 12-16-92 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Sec 36-102-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following evidence was obtained to support a perpetuation of the original public land survey corner.

1891 Clausen field notes indicate a wood post was found at the E 1/4 corner of Section 35.

1992 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, found the southwest corner of the NW 1/4 NW 1/4 and the northwest corner of Section 36 and dug a 4'x20'x8' deep hole on centerline of CSAH No. 7 at the location of the W 1/4 corner and found nothing. Therefore established position of corner using an extension of the west line of the NW 1/4 NW 1/4 of Section 35 and doubling over the distance.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. P106 "D" ✓

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 36, Township 102N Range 16W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 10-13-92 (DATE) found a NO EVIDENCE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10-13-92 (DATE) placed a CAST IRON MOUNUMENT

SKETCH OF REFERENCE TIES

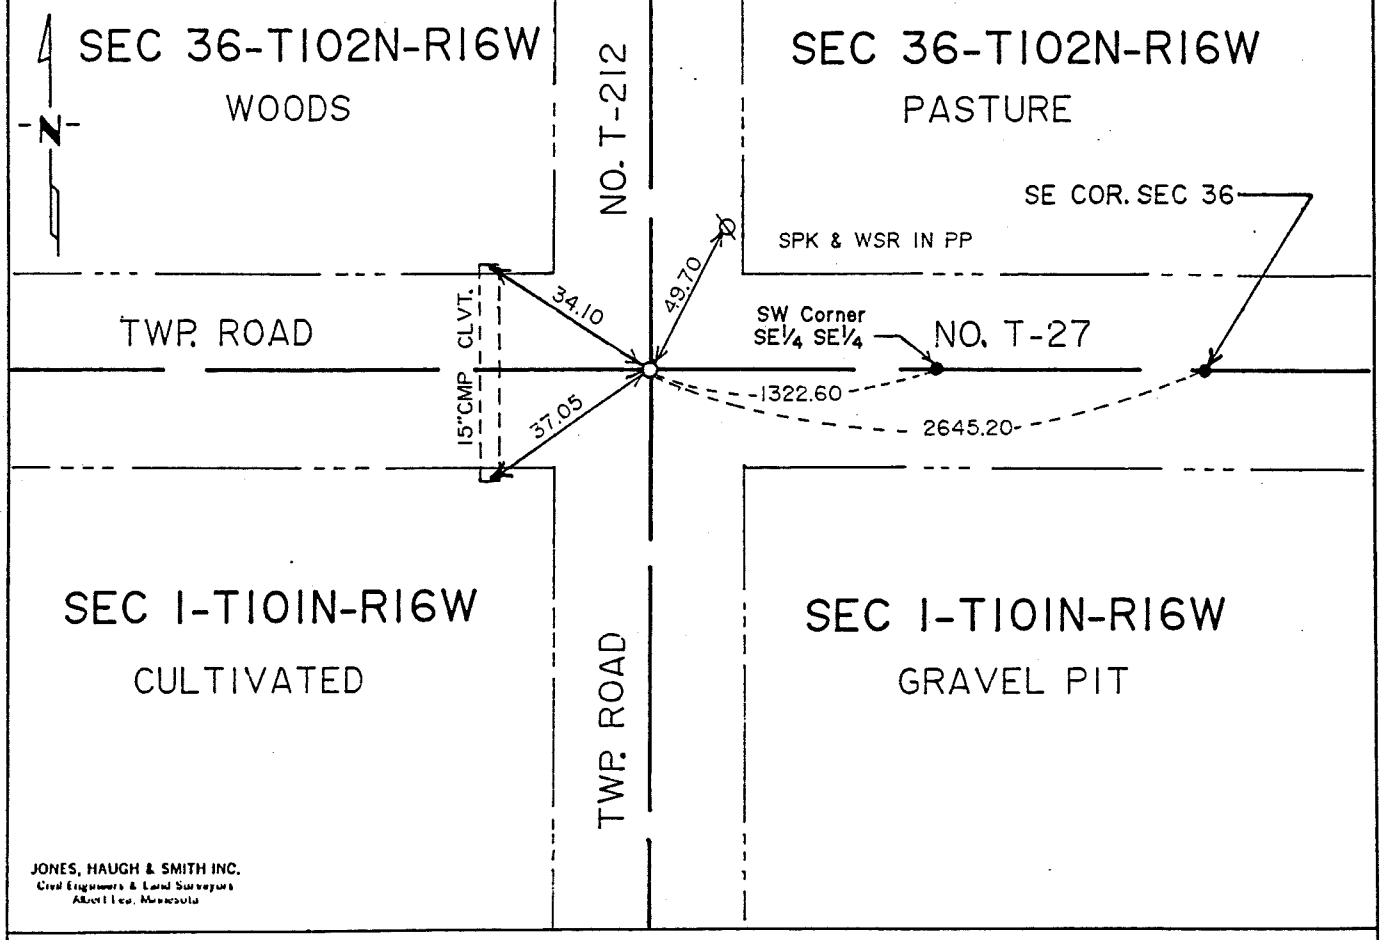

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 12-16-92 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

S 1/4 corner Sec 36-102-16

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench. The following ties were taken:

10" Burr Oak	W 75° E	387 links (255.42 ft)
10" Burr Oak	S 70° E	550 links (363.00 ft)

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following evidence was obtained to support a perpetuation of the original public land survey corner.

1954 Book A in the Office of Mower County Highway Department indicates a concrete monument inplace and uncovered during a survey of the County Pit. The following ties were taken:
NW 76.8' to blazed 10" cottonwood
SW 32.0' to corner fence post
SE 62.0' to blazed 10" Oak

1992 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, dug with County backhoe on the centerline centerline of township roads and no evidence was found of a concrete monument or original public land survey corner. Therefore using information recorded from E.V. Carlson, Mower County Engineer, in Book A, the southwest corner of the SE 1/4 SE 1/4 of Section 36 was re-established using ties from 1954 records and upon digging the southeast corner of the section and the southwest corner of the SE 1/4 SE 1/4. The 1/4 corner was established at the doubled over distance on an extension of the south line of the SE 1/4 SE 1/4 of said Section 36.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. P106 "G"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 36, Township 102N Range 16W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 10-13-92 (DATE) found a NO EVIDENCE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10-13-92 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

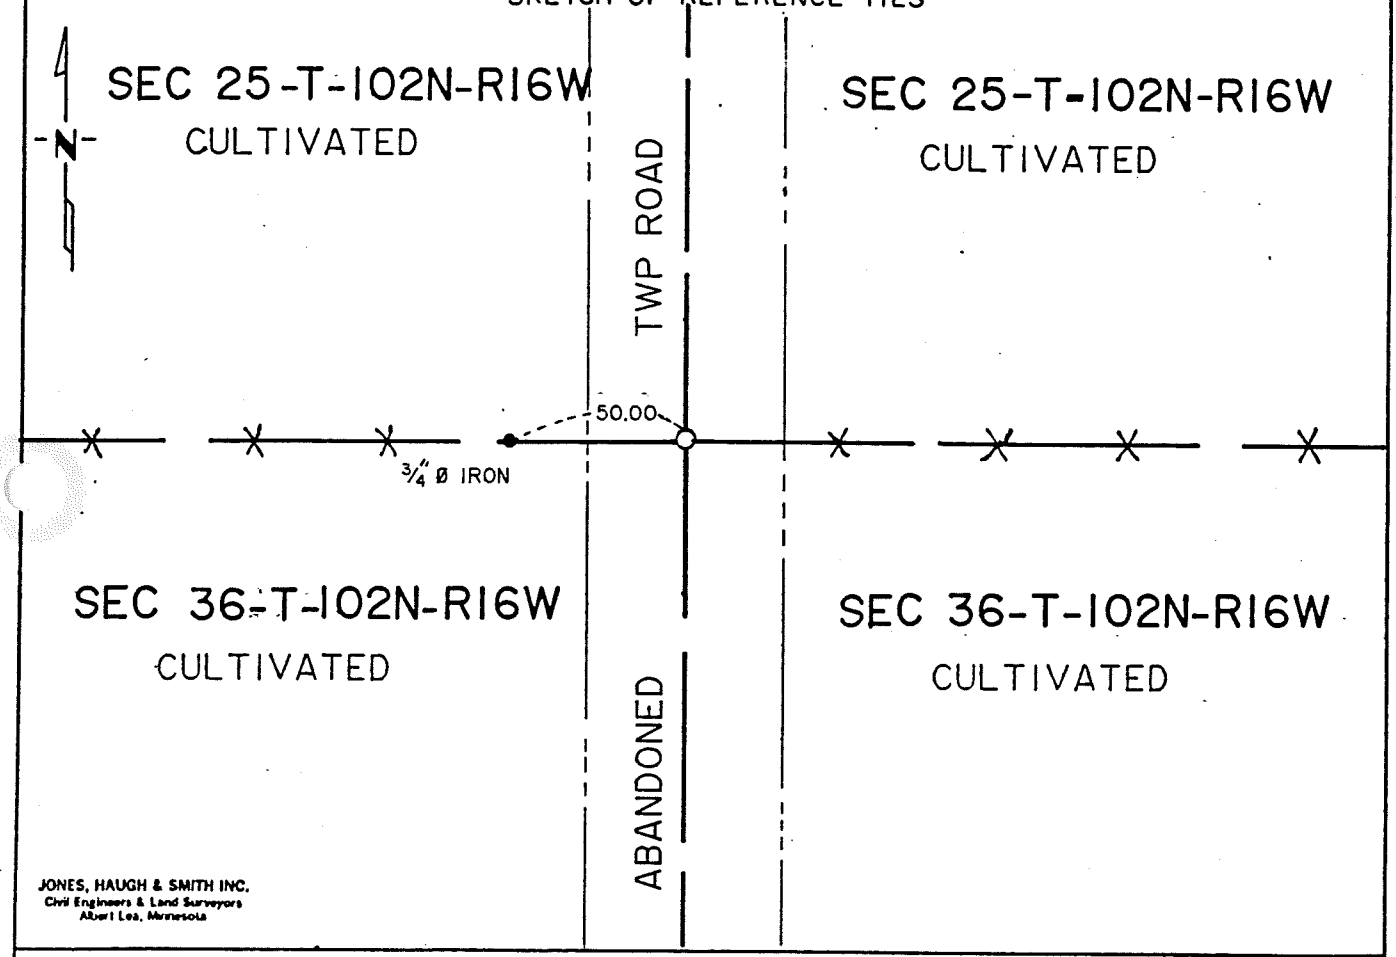

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 12-16-92 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Sec 36-102-16

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench. The following ties were taken:

12" Burr Oak N 47° E 267 links (176.22 ft)

The following were contacted for section corner information:

Mower County Highway Dept
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following evidence was obtained to support a perpetuation of the original public land survey corner.

1954 Book A in the Office of Mower County Highway Department indicates N 1/4 corner inplace marked with 1 3/4" diameter pipe. The following ties were taken:

E 50' to 3/4" diameter rod
W 50' to 3/4" diameter rod or fence line E and W

1992 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, set cast iron monument using 1954 Mower County Highway Department ties. A 2 foot more or less, cut was made removing road grade destroying 1 3/4" diameter pipe uncovered in 1954.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. P106 "B"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 36, Township 102N Range 16W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 10-13-92 (DATE) found a ½" ø IRON IN A CONCRETE MONUMENT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10-13-92 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

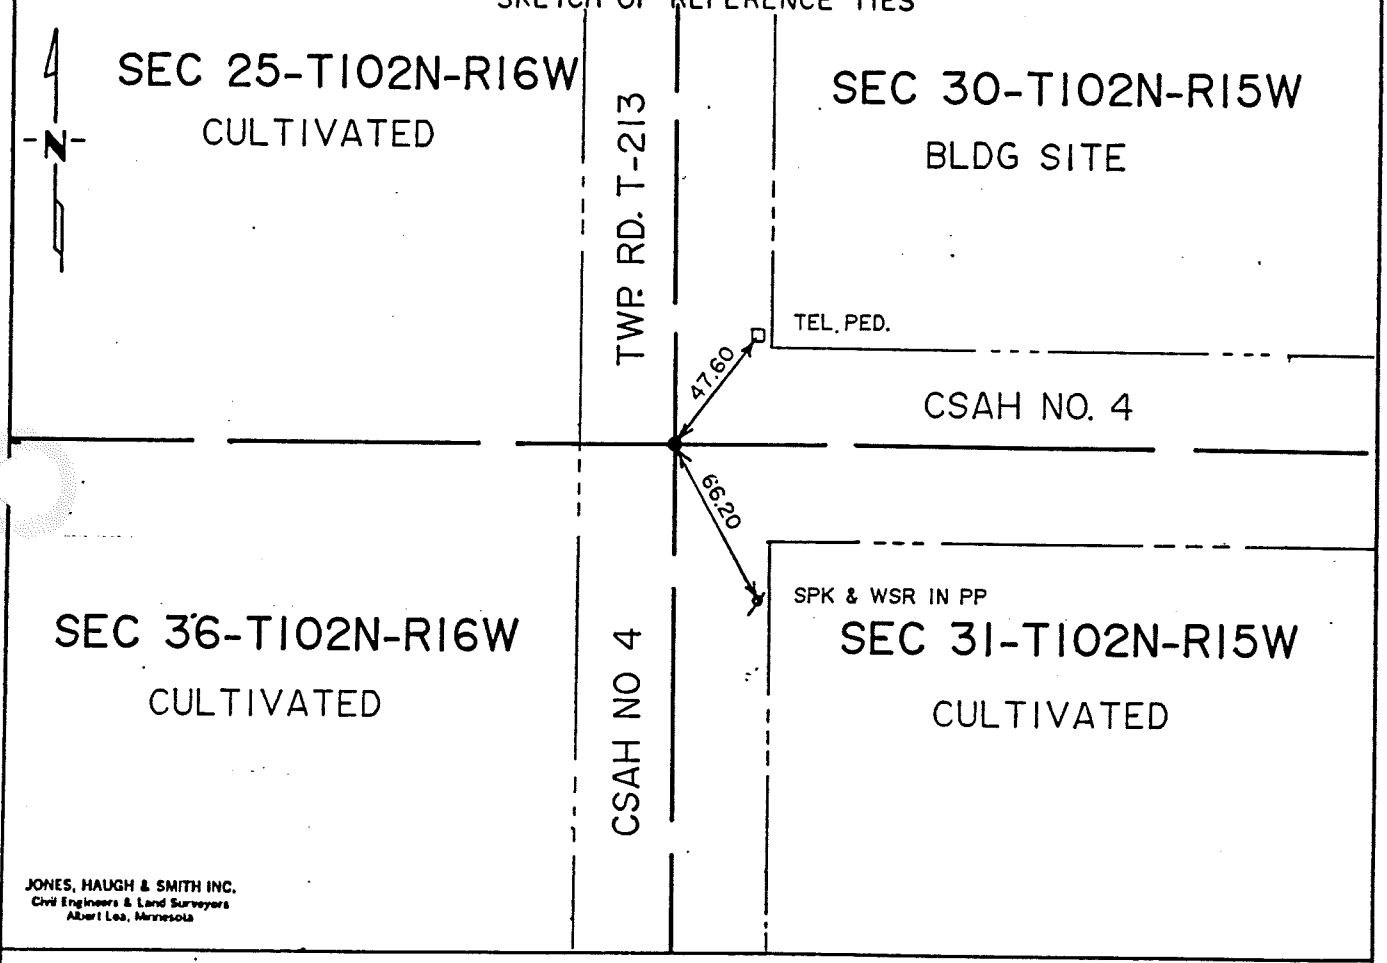

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 12-16-92 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NE corner Sec 36-102-16

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following evidence was obtained to support a perpetuation of the original public land survey corner.

Book A in the Office of Mower County Highway Department indicates a corner. No identification is given to type of monument. The following ties were taken:
SW 64.8' to fence post
SE 49.4' to fence post
NW 48.5' to mail box
NW 44.0' to fence post

1992 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, dug a 4'x4'x2.5' deep hole and uncovered a 1/2" diameter iron in a partially destroyed concrete monument. No further evidence was found. Set cast iron monument at road surface above concrete monument.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. P 106 110"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 36, Township 102N Range 16W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 10-13-92 (DATE) found a NO EVIDENCE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10-13-92 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

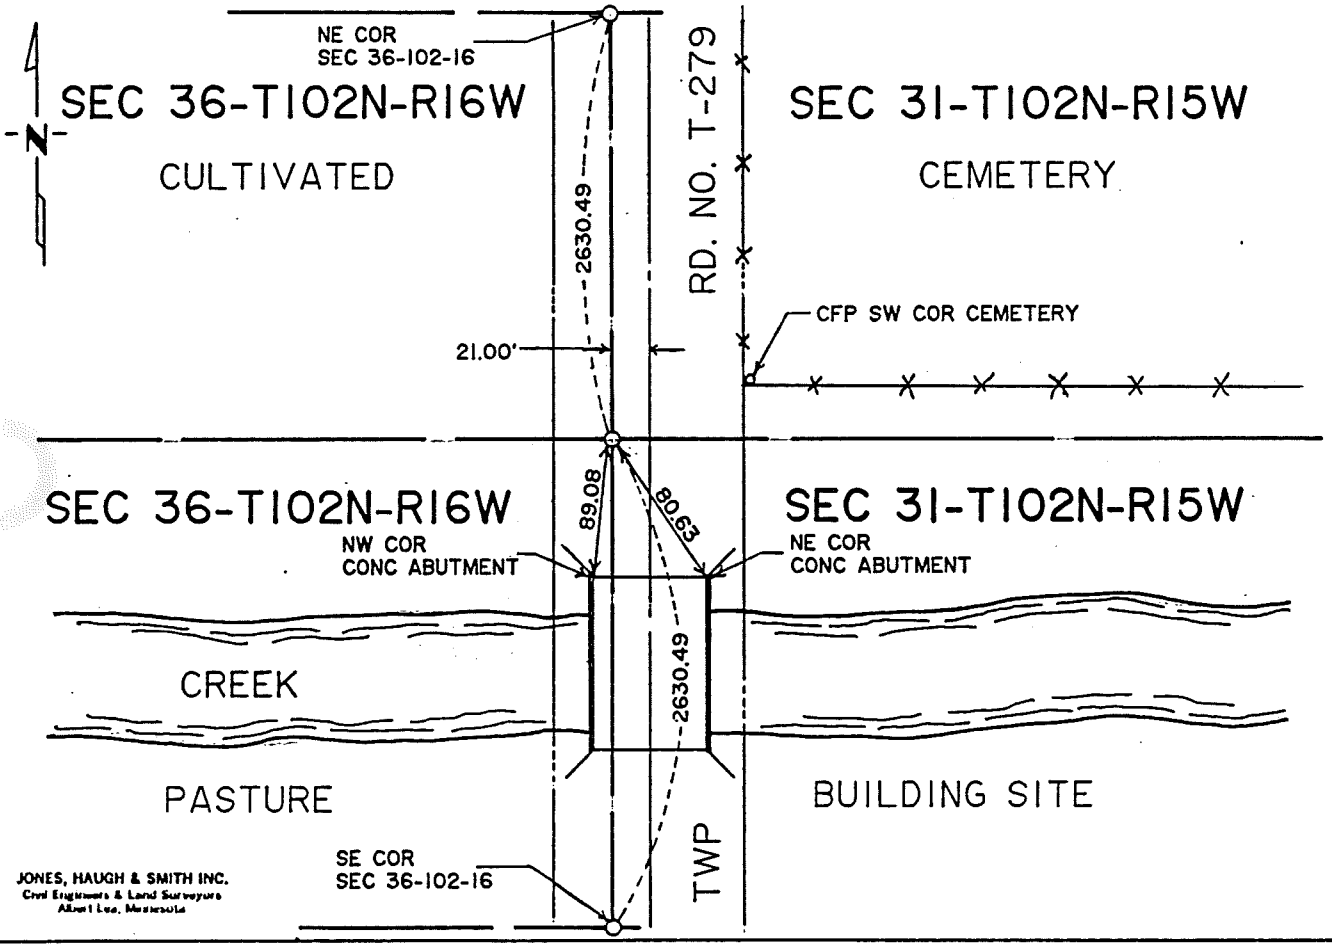

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 12-16-92 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

E 1/4 corner Sec 36-102-16

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench. The following ties were taken:

10"	Black Oak	N 1° W	84 links (55.44 ft)
11"	Black Oak	S 22° W	195 links (128.70 ft)

The following were contacted for section corner information:

Mower County Highway Dept
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following evidence was obtained to support a perpetuation of the original public land survey corner.

1879 Clausen field notes indicate a government post at the W 1/4 corner of Section 31-102-15.

1992 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, found no evidence of the original government wood post noted in Clausen field notes of 1879. Original corner was destroyed by new bridge construction. Township Road T-279 meanders to meet the new bridge. Therefore we set the public land survey corner at the distance between the northeast corner and the southeast corner of Section 36 and on a straight line six inches below ground surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. P106 "F"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 36, Township 102N Range 16W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 10-13-92 (DATE) found a 3/4 X 12" IRON OVER 6" DIAMETER CONCRETE MONUMENT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10-13-92 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

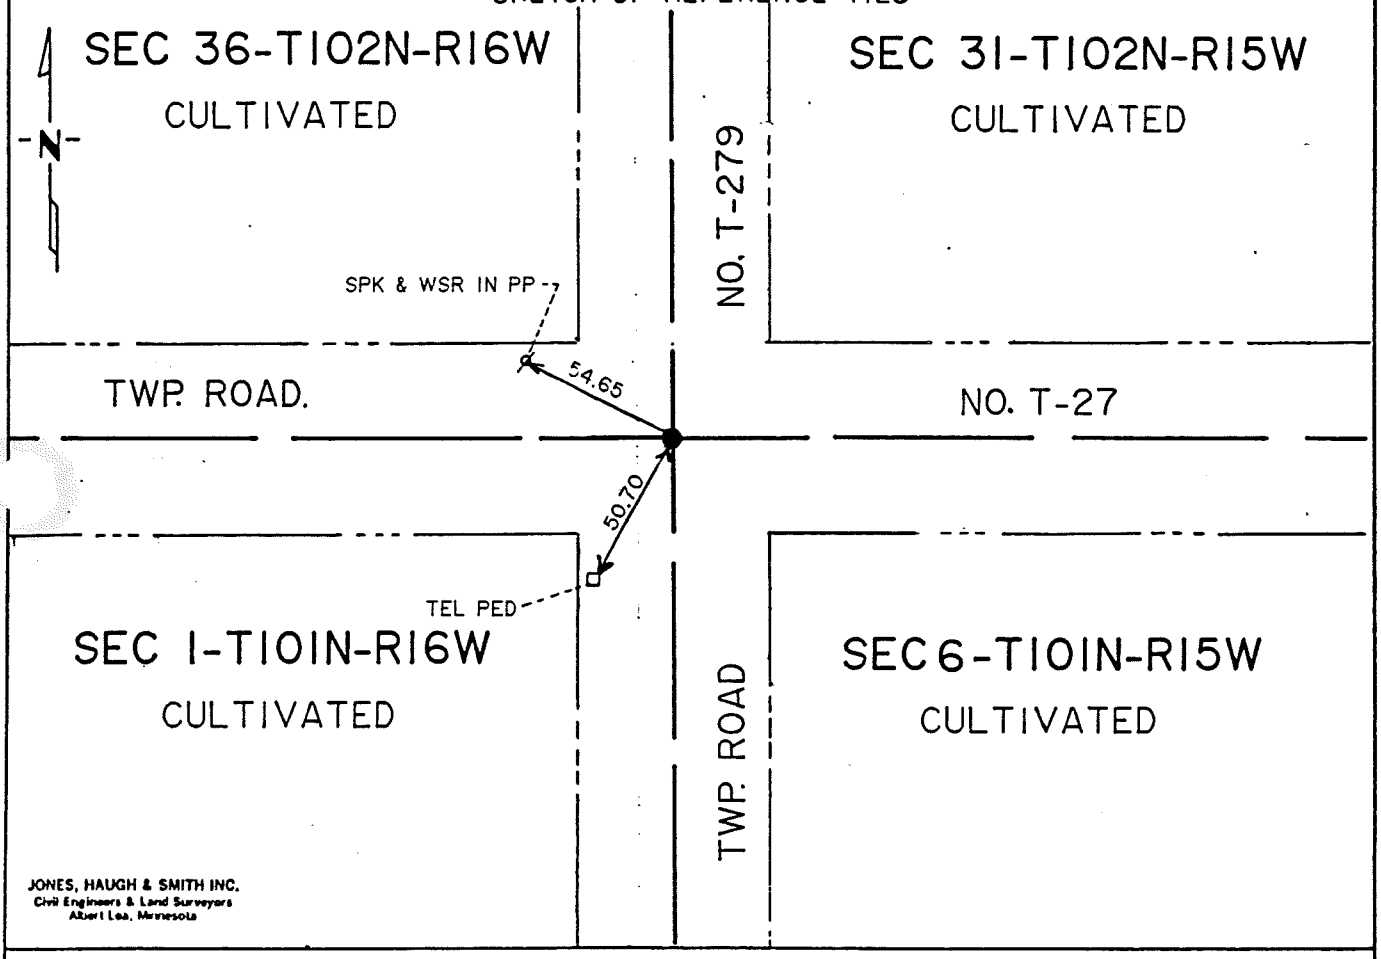

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] 12-16-92
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SE corner Sec 36-102-16

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench. The following ties were taken:

12" Black Oak	N 53 1/2° E	95 links (62.70 ft)
10" Burr Oak	N 77° W	558 links (368.28 ft)
10" Burr Oak	S 48° W	565 links (372.90 ft)
11" Burr Oak	S 44° E	357 links (235.62 ft)

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following evidence was obtained to support a perpetuation of the original public land survey corner.

1879 Clausen notes indicate a post set at the SW corner Section 31-102-15, Clayton Township.

1954 Book A of the Mower County Highway Department indicates a 2' long concrete monument 8" under road surface over a stone at the southeast corner of Section 36-102-16. The following ties were taken:
56.7' WNW to blazed 10" Oak
43.7' SW to blazed PP
45.7' SE to tele pole
48.0' NE to cor fence post

1992 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, dug with Mower County backhoe and uncovered a 3/4" diameter x 12" long iron over a 6" diameter concrete monument 2.5 feet deep in virgin soil. Left concrete monument as found and set cast iron monument on road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.