P.23 "F"

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 11, Township 102N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 6-23-88 (DATE) found a 3/4"Ø IRON CAST IN A CONC. MONUMENT 2' BELOW ROAD SURFACE.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6-23-88 (DATE) placed a 5/8" IRON CAPPED RLS 13807 OVER CONCRETE MONMENT.

SKETCH OF REFERENCE TIES

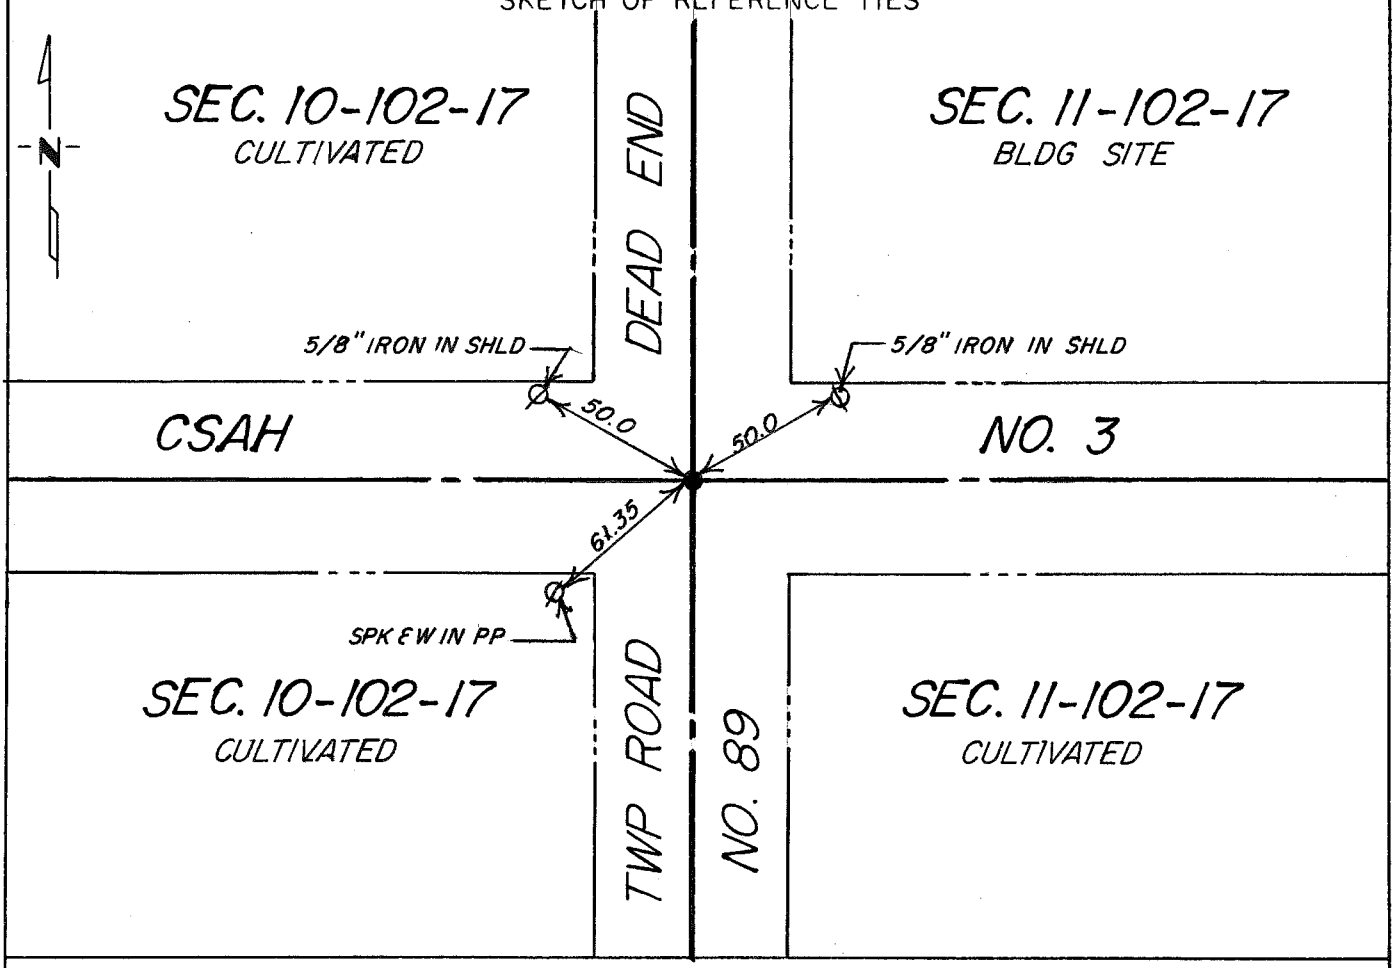

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] III
SIGNATURE

12-22-89
DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE
W¼ corner Section 11-102-17

This corner was originally established by Deputy Surveyor William I. Anderson of the United States General Land Office in 1854. The government notes show this corner was marked with a charred stake together with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Records Office

1930± Mower County grading plan shows a concrete monument at ¼ corner.

1989 Jones Haugh & Smith Inc. personnel together with the Mower County backhoe operator dug on the centerline centerline of N-S-E-W roads and uncovered a 3/4" diameter iron cast in a 6" diameter concrete monument 2' below road surface. Placed a capped 5/8"Ø x 16" iron RLS 13807 over concrete monument.

The monument found fits occupation and road centerlines within the section and agrees with past records from the Mower County Highway Department.

For electronic survey data and analysis, contact firm of Jones, Haugh & Smith.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 12, Township 102N, Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 10-11-85 (DATE) found a concrete monument 1.7' deep.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 10-11-85 (DATE) placed a cast iron monument on road surface over monument found.

SKETCH OF REFERENCE TIES

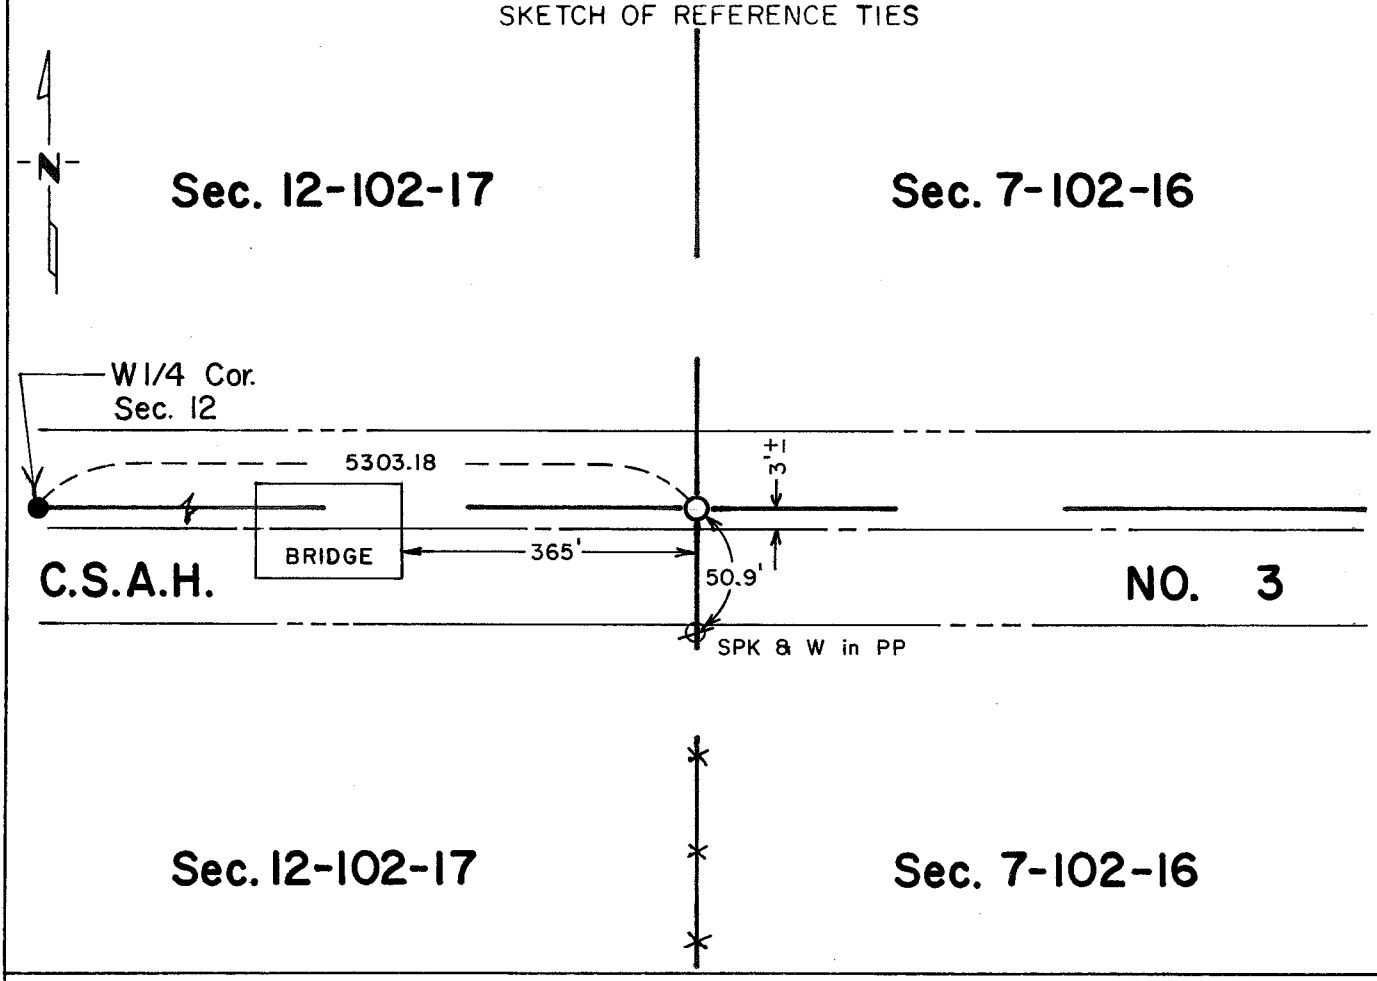

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-23-91

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

E 1/4 corner Sec 12-102-17

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Survey Office in 1853. The government notes show this corner was marked with a wood post and the following ties were taken:

10" Burr Oak	S 1/2° E	500 links (330.0')
10" Burr Oak	N 1° E	706 links (465.96')

The following were contacted for section corner information:
Mower County Engineering Department
Mower County Recorder's Office

1954 The County Engineer's Book "A" shows a concrete monument inplace in accordance with Mower County Road Plan and ties.

1985 Jones, Haugh & Smith crew found a concrete monument 1.7 feet deep. Placed a cast iron monument on road surface over monument found.

Corner found fits occupation fence lines south and agrees with past records. Therefore accepted corner as best evidence of a perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 12, Township 102N, Range 17 W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 10-11-85 (DATE) found a concrete monument 1.7' deep.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 10-11-85 (DATE) placed a cast iron monument on road surface over monument found.

SKETCH OF REFERENCE TIES

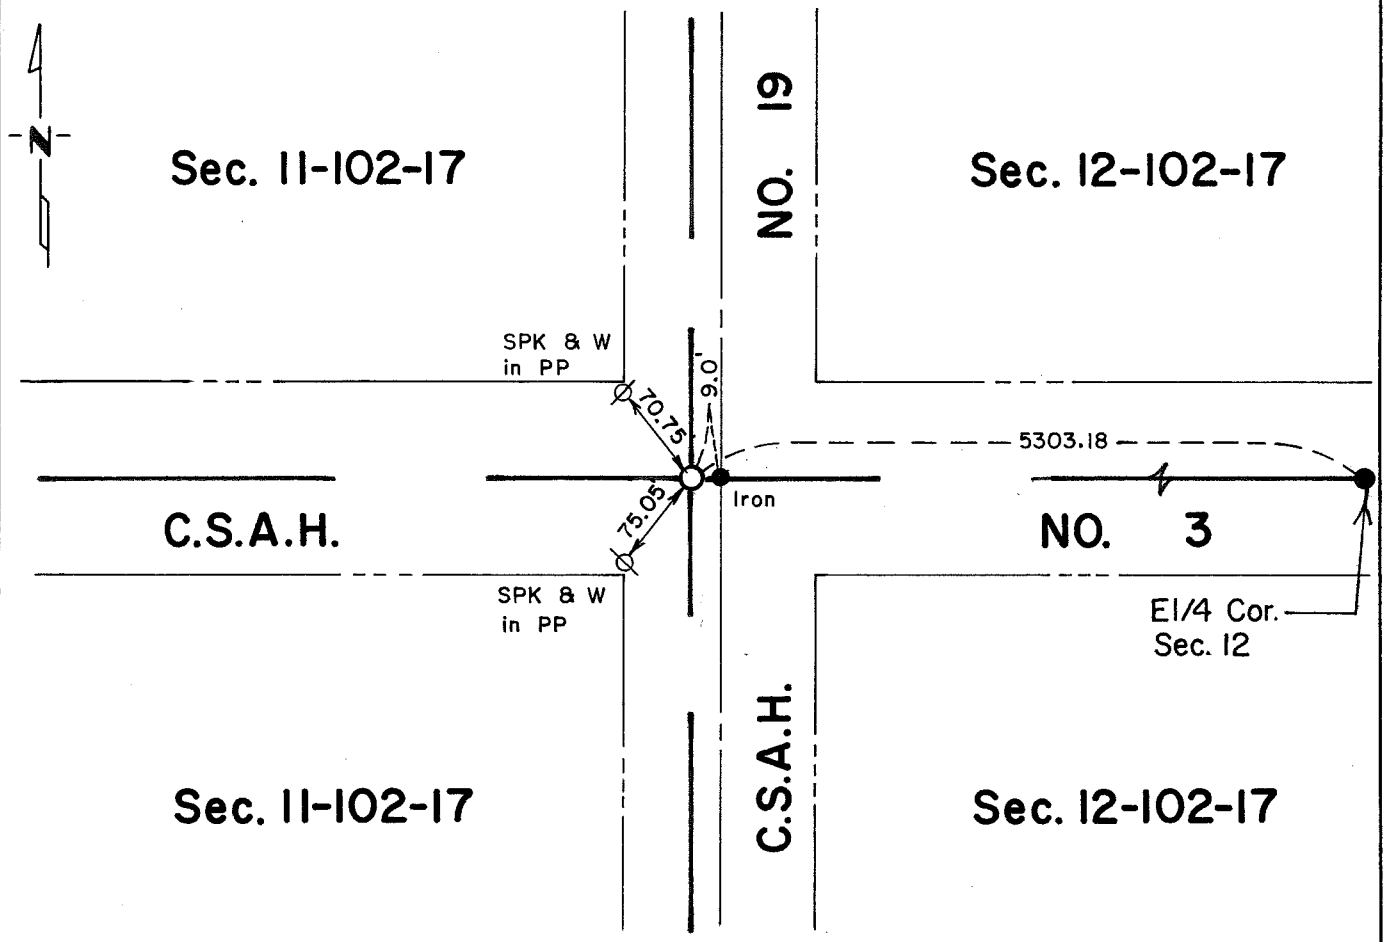

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-23-91

Registration No. 13607

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Sec 12-102-17

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Survey Office in 1854. The government notes show this corner was marked with a wood post and a mound of earth with a trench.

The following were contacted for section corner information:
Mower County Engineering Department
Mower County Recorder's Office

1952 Book "A" of the County Engineer's Office shows an iron stake over a stone and tile inplace.

1962 North-south road PI was set 9.0 feet east of 1/4 corner.

1963 Road plan concrete monument.

1985 Jones, Haugh & Smith crew found concrete monument 1.7 feet deep. Placed a concrete monument on centerline of north-south road surface over monument found.

Corner found fits east-west road centerline and agrees with past records. Therefore accepted corner as best evidence of a perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

"P" TIE BOOK. P23 Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 15, Township 102N, Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 10-7-85 (DATE) found a 8"x10"x16" pointed field stone with remains of wood post

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 10-7-85 (DATE) placed a 5/8"ϕx24" iron on north side of stone and 5/8 ϕ x 24" iron over stone on road surface.

SKETCH OF REFERENCE TIES

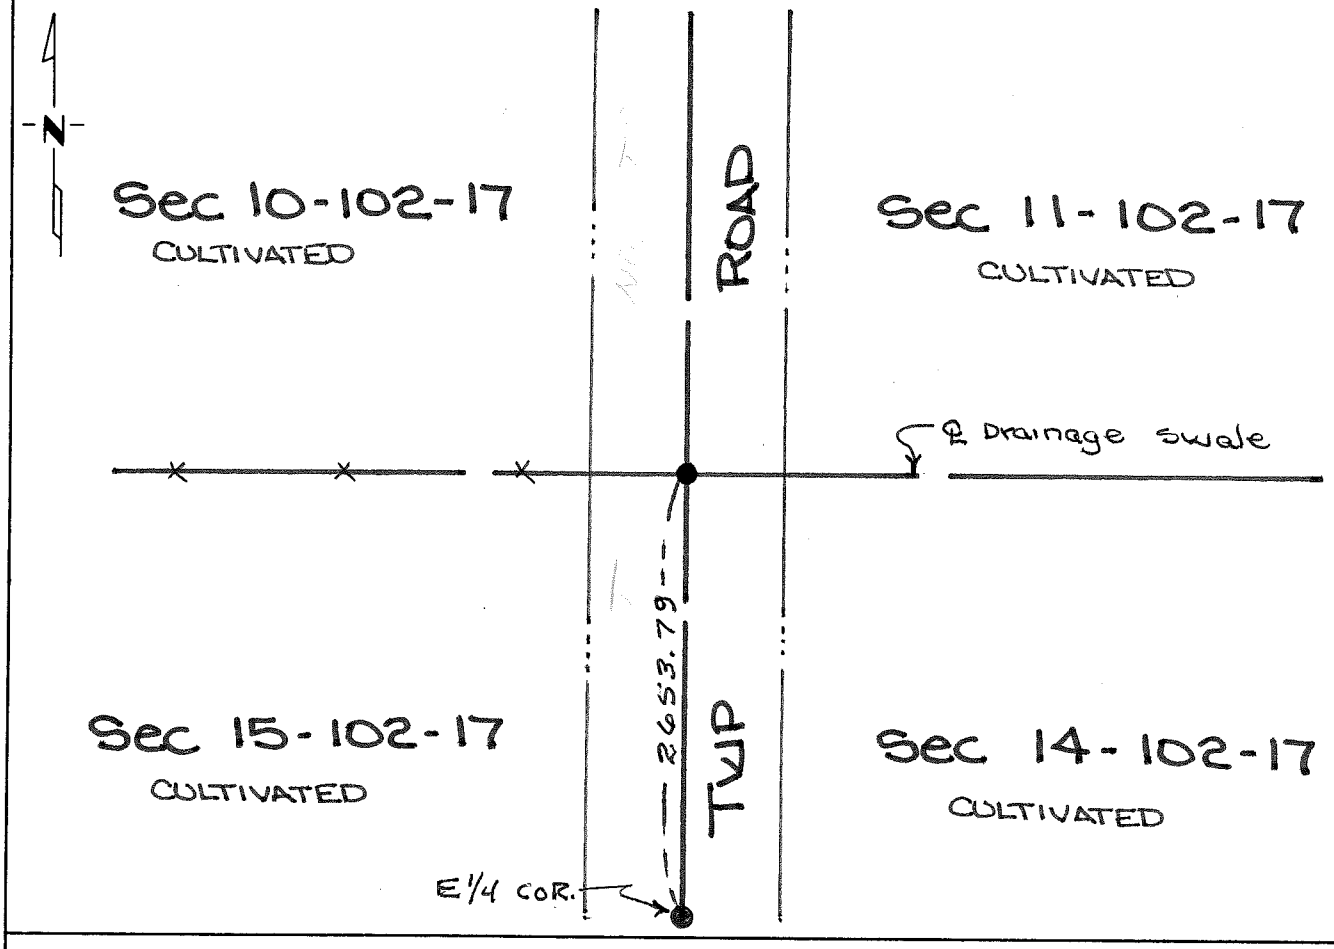

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] ☒ 10-10-85
SIGNATURE DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NE cor Section 15-102-17

1854 William I. Anderson, Deputy Surveyor, set wood post during public land survey.

1899 M.N. Clausen, Registered Land Surveyor, found government post during private survey.

1985 Jones, Haugh & Smith Inc crew dug with backhoe at intersection of centerline of township road and fence line west at 2.5 feet below road surface. Uncovered a 8" x 10" x 16" long pointed field stone with the remains of an old wooden post. Placed 5/8"ø x 24" iron on north side of stone and a 5/8"ø x 24" iron over stone on road surface.

Corner found fits occupation and road centerline and was accepted as a perpetuation of the public land survey corner.

TIE BOOK P. 23

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 15, Township 102N, Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 10-7-85 (DATE) found a 10"x12"x20" pointed field stone with remains of wood post on north side of stone

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 10-7-85 (DATE) placed a 5/8"ϕx24" iron in remains of wood post

SKETCH OF REFERENCE TIES

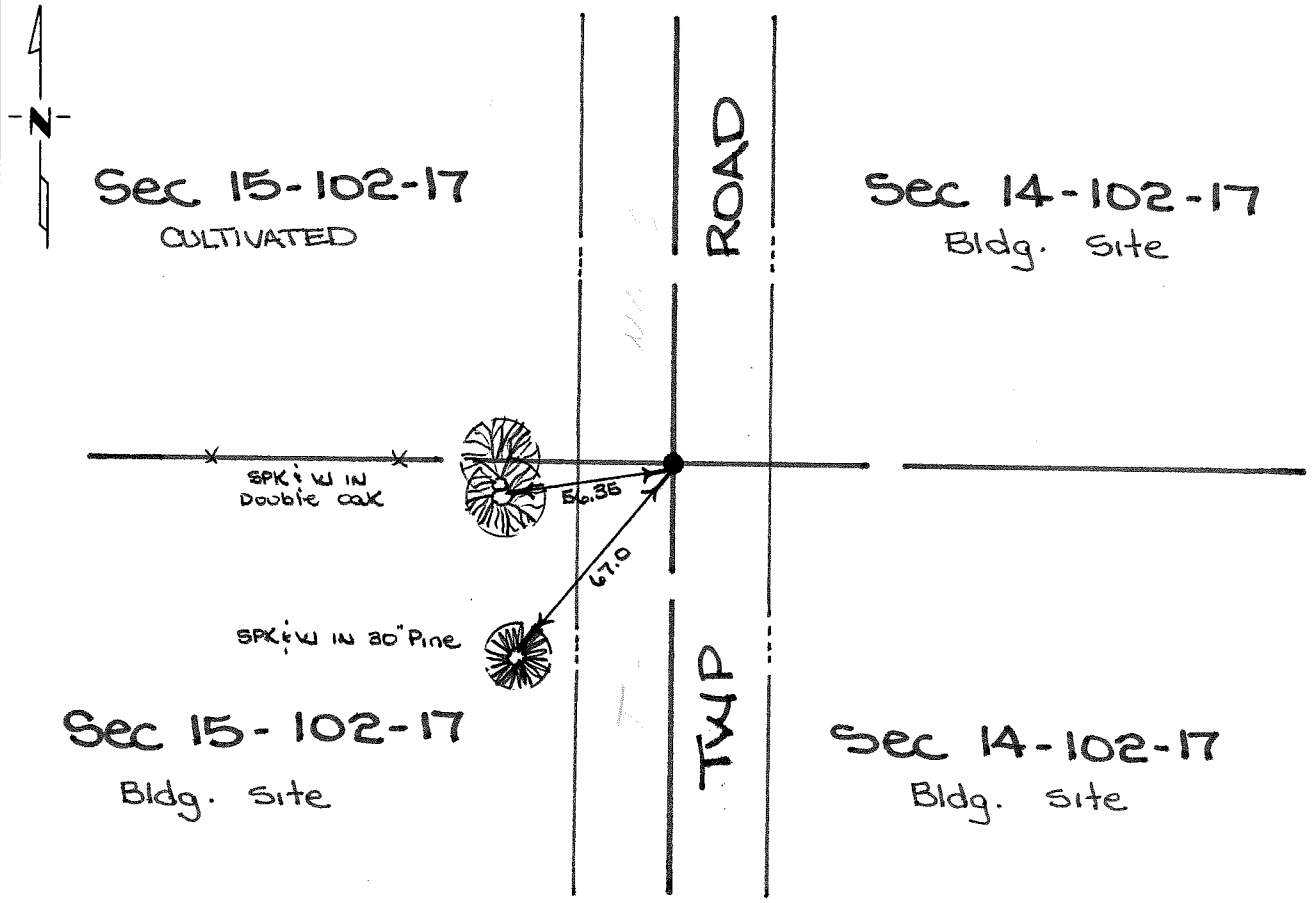

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

H. [illegible] III
SIGNATURE

10-10-85
DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

$E\frac{1}{4}$ corner Section 15-102-17

1854 William I. Anderson, Deputy Surveyor, set wood post during public land survey.

1888 M.N. Clausen, Registered Land Surveyor, found government post during private land survey.

1985 Jones, Haugh & Smith Inc crew dug with backhoe at intersection of centerline township road and fence line west at a depth of 1.5 feet below road surface. Found a large 10" x 12" x 20" pointed stone with remains of wood post on north side of stone. Drive a 5/8"ø x 24" iron into wood post 0.5 feet below road surface.

Corner found fits occupation and road centerline and was accepted as a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 16, Township 102N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 04/01/1996 (DATE) found a 5/8" IRON CAP NO. 13807

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 04/01/1996 (DATE) placed a – CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

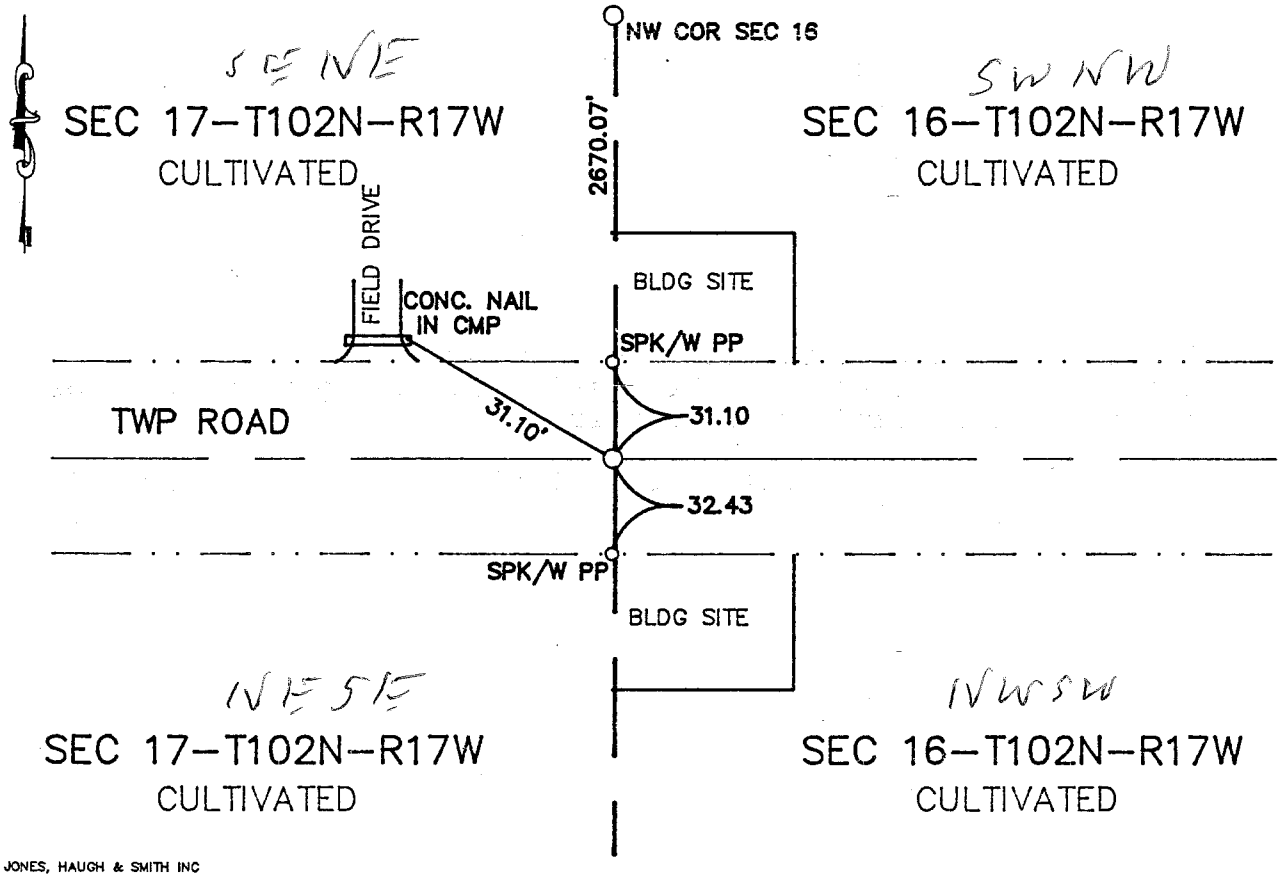

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-9-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower 446235

I hereby certify that this document was filed in the County Rec. office at 1 P .M. on the 10th day of July A.D., 1996

COUNTY RECORDER Charles Enger

By Cheryl Schuler, Deputy

DOCUMENT NO. 446235

M.H.D. FORM NO. 2105

Book 91 Page 492 BOOK 91 PAGE 492

W 1/4 Cor SEC 16-102-17

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at CL of township road E-W. Found a 5/8" iron capped #13807. Placed a cast iron monument at surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 16, Township 102N Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 04/01/1996 (DATE) found a 6" BROKEN WOOD POST

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 04/01/1996 (DATE) placed a CAST IRON MONUMENT ON EAST SIDE POST

SKETCH OF REFERENCE TIES

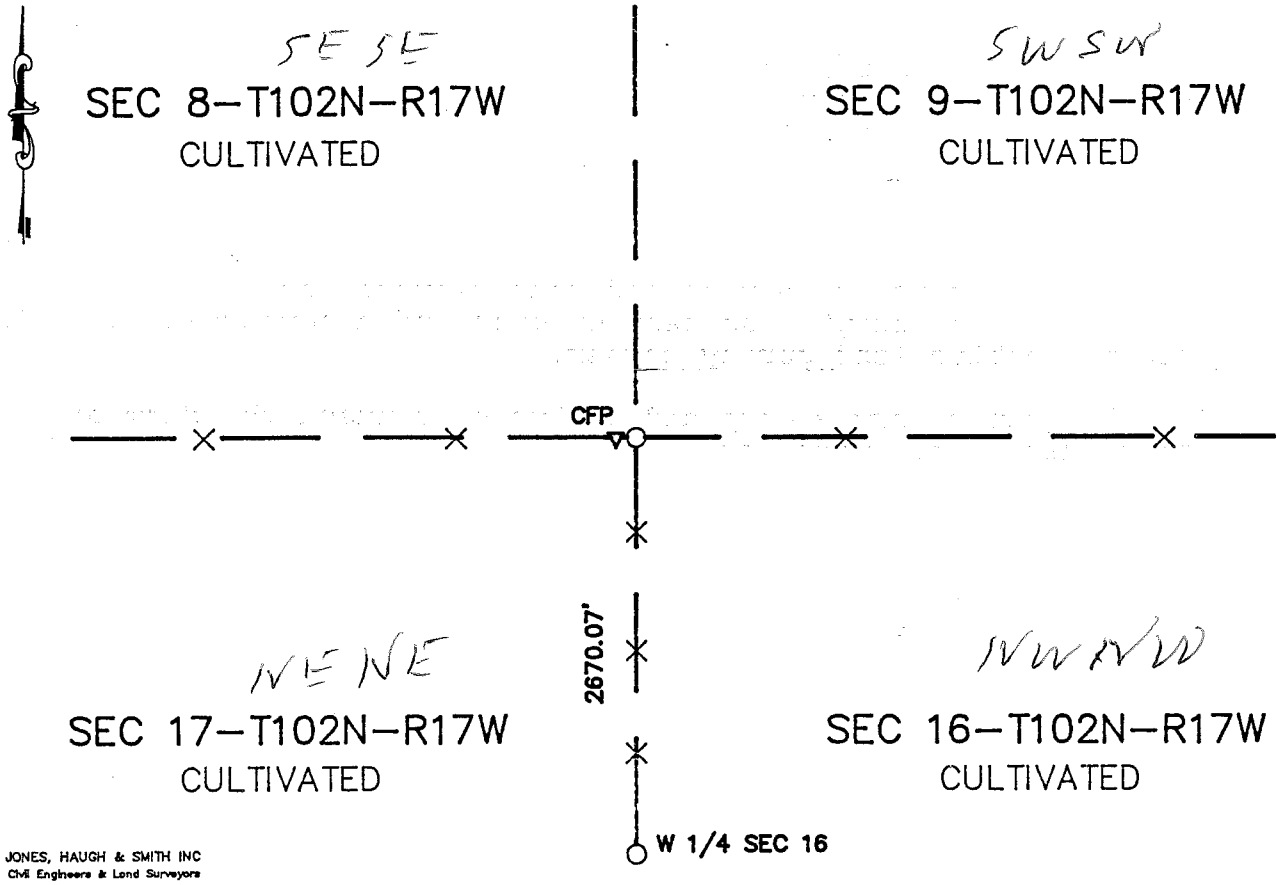

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-9-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower 446236

I hereby certify that this document was filed in the County Rec. office at 1 P.M. on the 10th day of July A.D., 1996

COUNTY RECORDER Charles Engel

By Arlene A. Taylor, Deputy

DOCUMENT NO. 0446236

M.H.D. FORM NO. 2105

Book 91 Page 494

BOOK 91 PAGE 494

NW Cor SEC 16-102-17

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, set the NW corner in line with line fence E-W and line fence south. Placed cast iron monument on east side of 6" broken wood corner post.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

BOOK 91 PAGE 495

Index No. P20 "D"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 17, Township 102N, Range 17 W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 7-13-87 (DATE) found a sq. headed bolt 3' long 1' below road surface.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 7-13-87 (DATE) placed a cast iron monument on road surface over bolt found.

SKETCH OF REFERENCE TIES

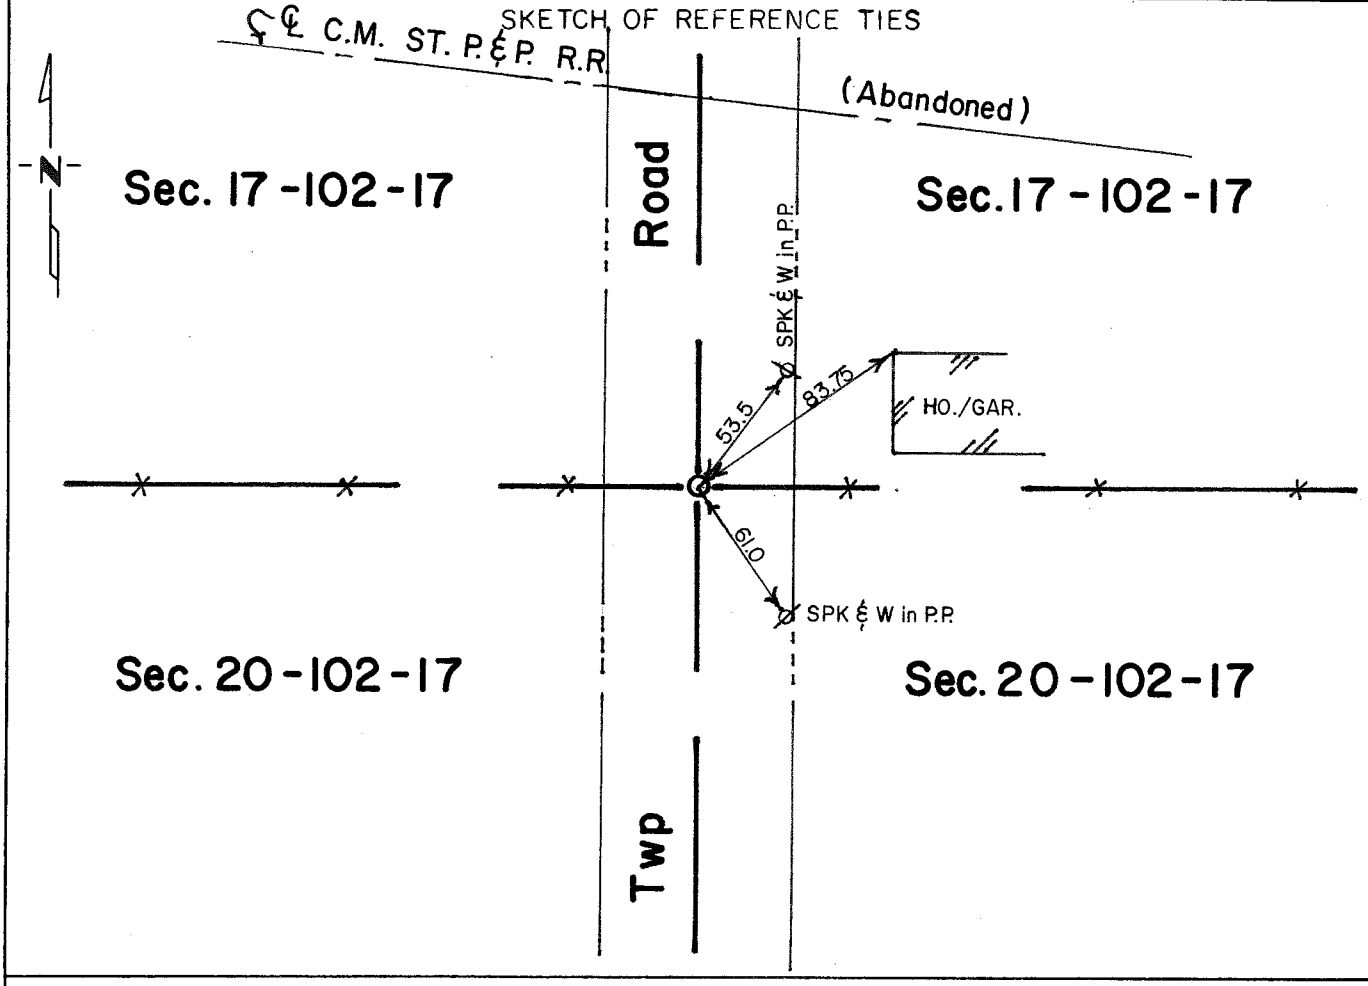

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 12-12-88 DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE
S¼ corner Section 17-102-17

This corner was originally established by Deputy Surveyor William I. Anderson of the US General Land Office in 1854. The government notes show this corner was marked with a wood post and the following bearing trees were marked:

9" Burr Oak	S 19½° W	371 Links
12" Burr Oak	N 50° W	290 Links

The following were contacted for section corner information:

Mower County Engineering Department

1987 Jones, Haugh & Smith crew dug with the Mower County backhoe on the centerline of north-south road in line with fence east and west and uncovered a three foot long square headed bolt one foot below road surface. Continued digging and uncovered no further evidence of public land survey corner. Accepted bolt as best evidence of perpetuation of public land survey corner and set a cast iron monument.

For electronic survey data and analysis, contact firm of Jones, Haugh & Smith

Index No. P20 "N"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 18, Township 102N, Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 7-13-87 (DATE) found a corner fence post at 3-way fence intersection.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 7-13-87 (DATE) placed a cast iron monument on west side of corner fence post found.

SKETCH OF REFERENCE TIES

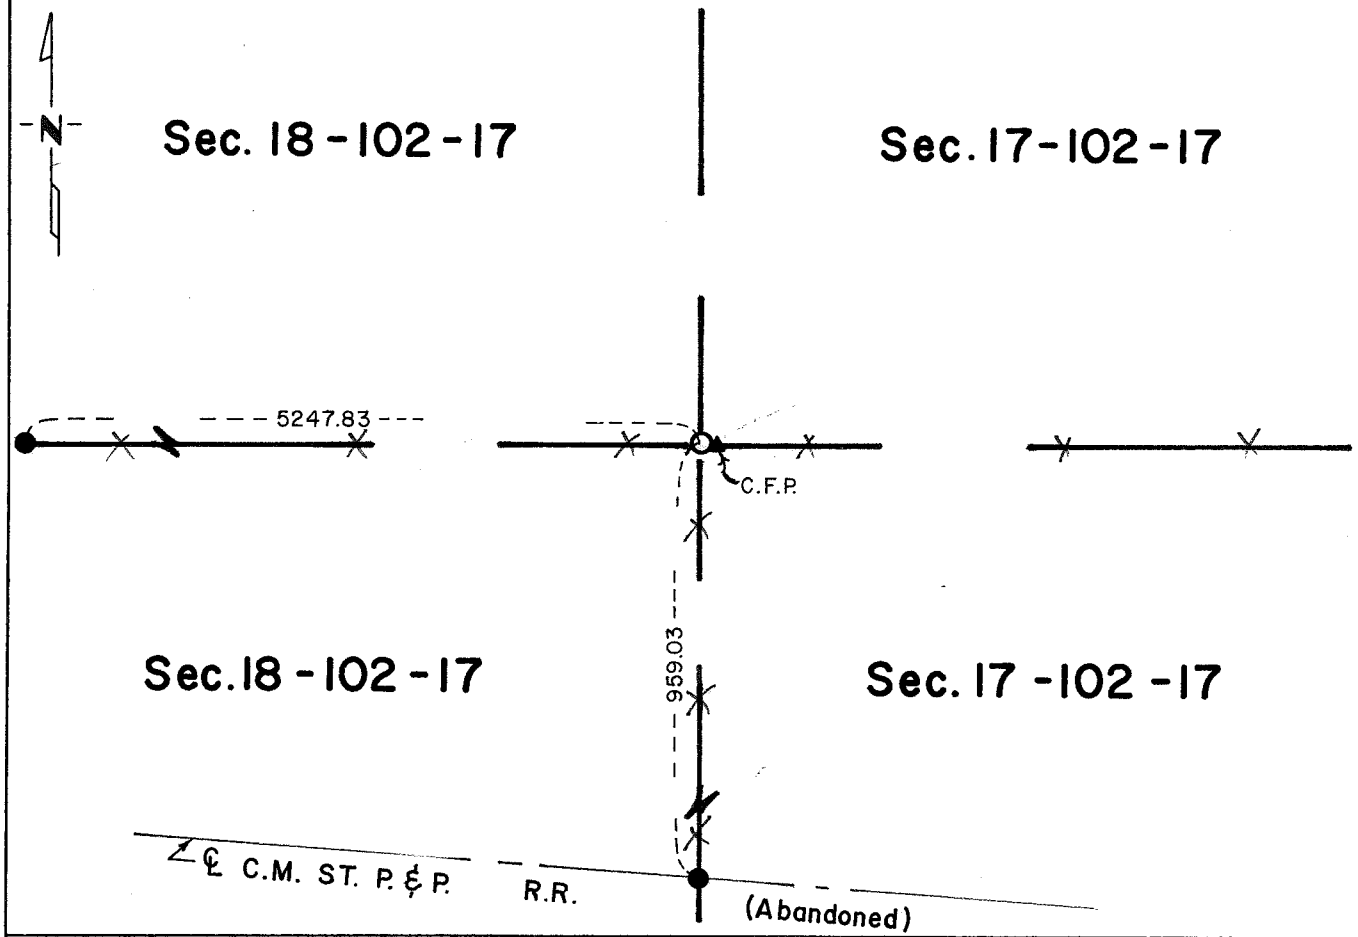

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 12-12-88 DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE
$E\frac{1}{4}$ corner Section 18-102-17

This corner was originally established by Deputy Surveyor William I. Anderson of the US General Land Office in 1854. The government notes show this corner was marked with a wood post and the following bearing trees were marked:

12" Burr Oak	S 30^{o} W	30 Links
13" Burr Oak	N 48^{o} E	65 Links

The following were contacted for section corner information:

Mower County Engineering Department

1978 Jones, Haugh & Smith crew during private survey found a corner fence post in a 3-way fence intersection and accepted as best evidence.

1987 Jones, Haugh & Smith crew found a corner fence post at a 3-way fence intersection which agrees with 1978 records. Placed a cast iron monument on west side of corner fence post.

This position is accepted as best evidence of a perpetuation of public land survey corner.

For electronic survey data and analysis, contact firm of Jones, Haugh & Smith

Index No. P20 "M"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 18, Township 102N, Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 7-13-87 (DATE) found a 3/4" ø iron in line with fences north and east.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 7-13-87 (DATE) placed a cast iron monument on road surface over iron found.

SKETCH OF REFERENCE TIES

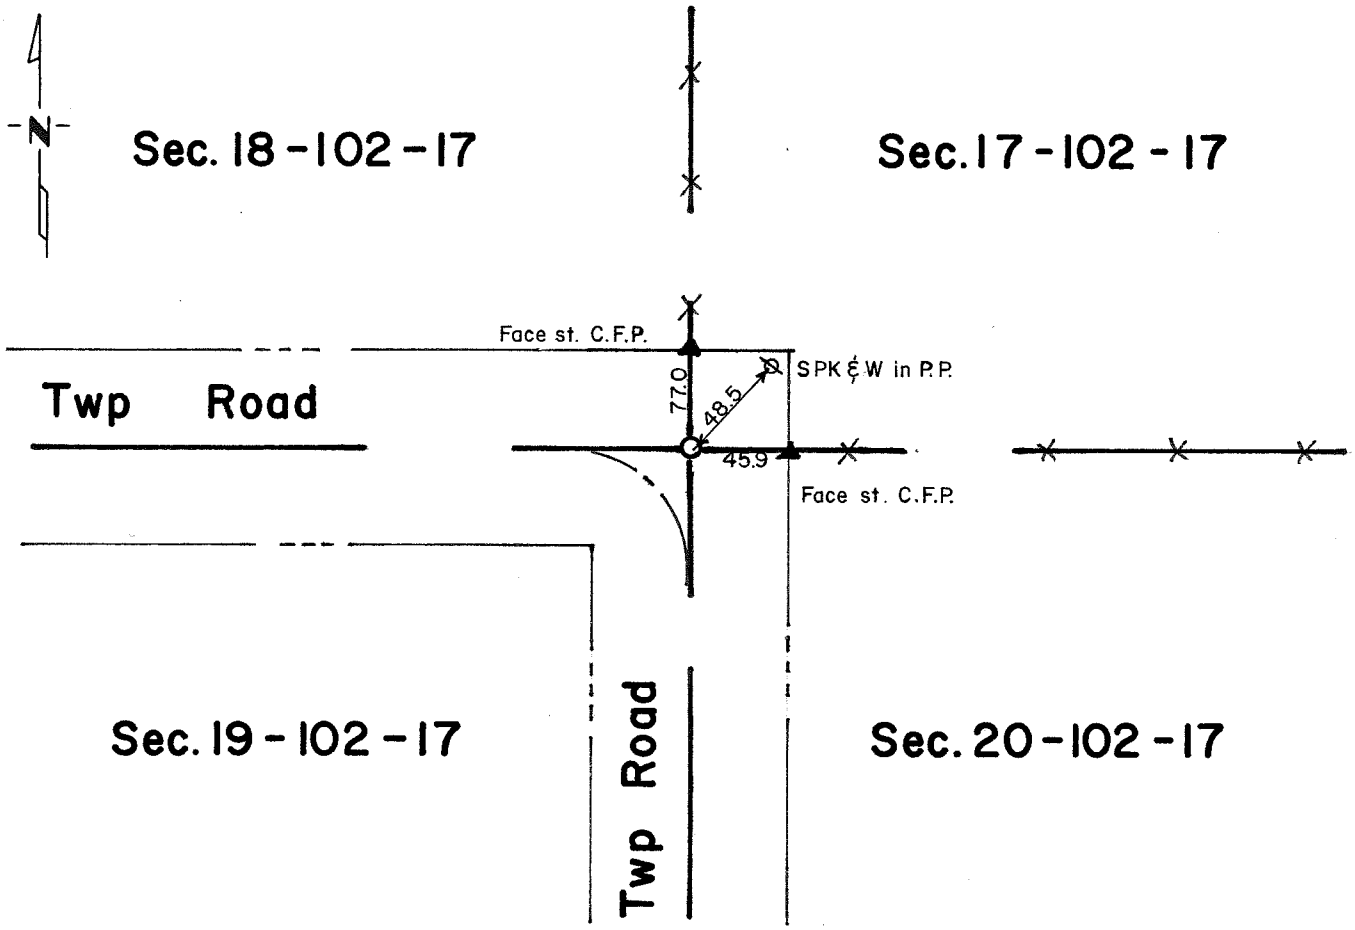

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 12-12-88 DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE
SE corner Section 18-102-17

This corner was originally established by Deputy Surveyor William I. Anderson of the US General Land Office in 1854. The government notes show this corner was marked with a wood post and the following bearing trees were marked:

10" Burr Oak	S 72° W	70 Links
9" Burr Oak	N 53° W	385 Links
16" Burr Oak	N 4° E	395 Links
17" Burr Oak	N 51° E	30 Links

The following were contacted for section corner information:

Mower County Engineering Department

No record of this corner was obtained from the Mower County Engineer Department or from the private records of Jones, Haugh & Smith Inc.

1987 Jones, Haugh & Smith crew dug with the Mower County backhoe on centerline of road tangents south and west in line with fence east and north and uncovered a 3/4" diameter iron one foot below ground surface. Continued digging and found no further evidence of public land survey corner.

The location of corner appears it would have been destroyed by township road construction. The position of iron found was in the easterly road ditch. Accepted iron found as best evidence of the original public land survey corner and set a cast iron monument.

For electronic survey data and analysis, contact firm of Jones, Haugh & Smith