Index No. P20 "P"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 20, Township 102N, Range 17 W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 7-13-87 (DATE) found a 5/8" ø iron.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 7-13-87 (DATE) placed a cast iron monument on road surface over iron found.

SKETCH OF REFERENCE TIES

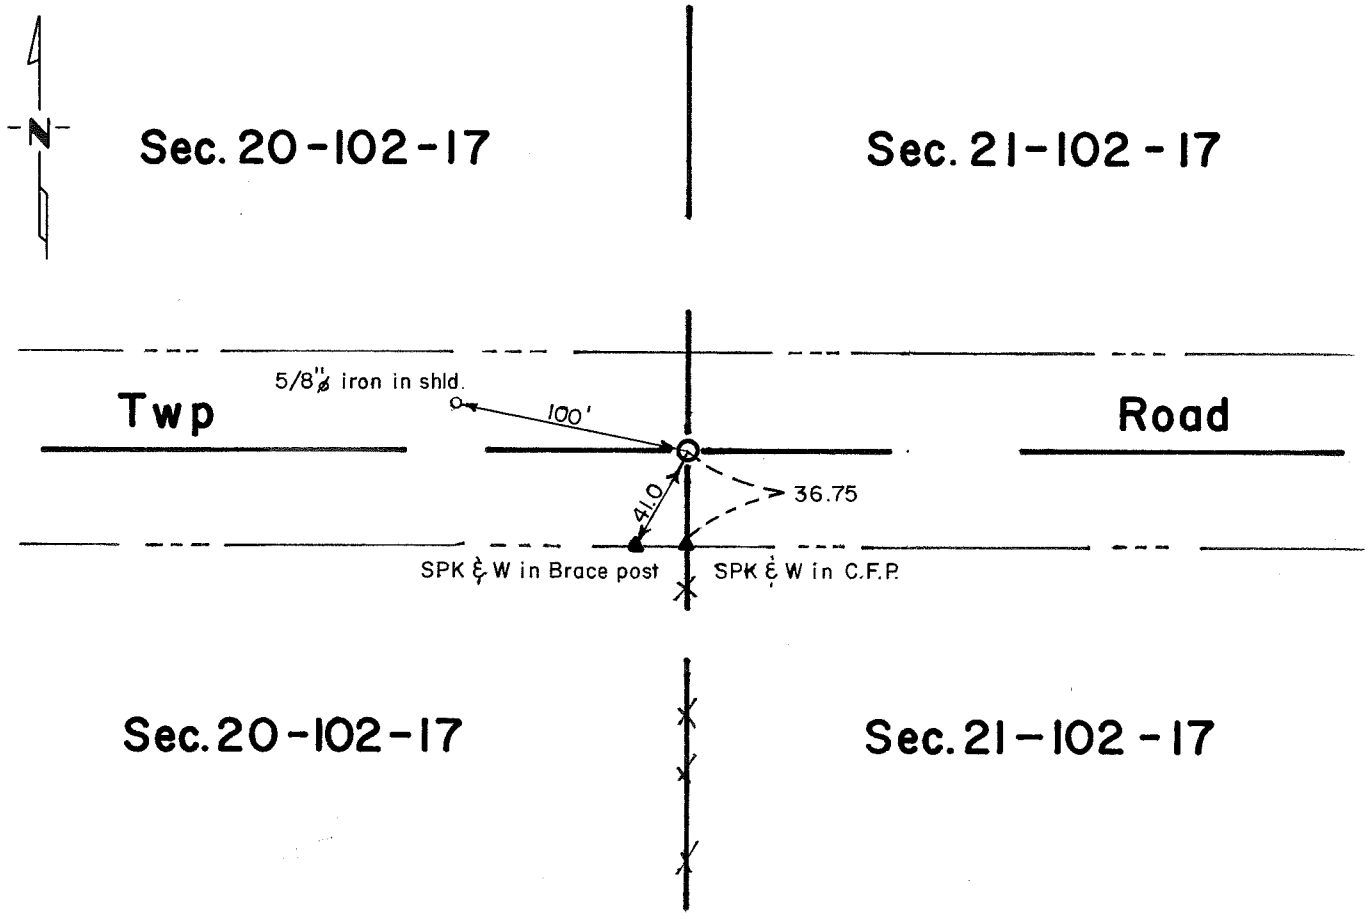

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 12-12-88 DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE
$E\frac{1}{4}$ corner Section 20-102-17

This corner was originally established by Deputy Surveyor, William I. Anderson of the US General Land Office in 1854. The government notes show this corner was marked with a wood post and the following bearing trees were marked:

14" Burr Oak N 18° W 60 Links

The following were contacted for section corner information:

Mower County Engineering Department

No record of the corner was obtained from Mower County Engineering Department or private records of Jones, Haugh & Smith Inc.

1987 Jones, Haugh & Smith crew dug with the Mower County backhoe on centerline of east-west road in line with fence south and uncovered a 5/8" diameter iron one foot below road surface. Continued digging and found no further evidence of public land survey corner. Reset 5/8" diameter iron and set cast iron monument over it on road surface.

The monument found fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact firm of Jones, Haugh & Smith

Index No. p76 11 Q' 20

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 20, Township 102N, Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 4-29-92 (DATE) found a ½"Ø X 30"LONG IRON

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 4-29-92 (DATE) placed a =⅝"ø x 16" iron stake monument (Capped RLS 13807)

SKETCH OF REFERENCE TIES

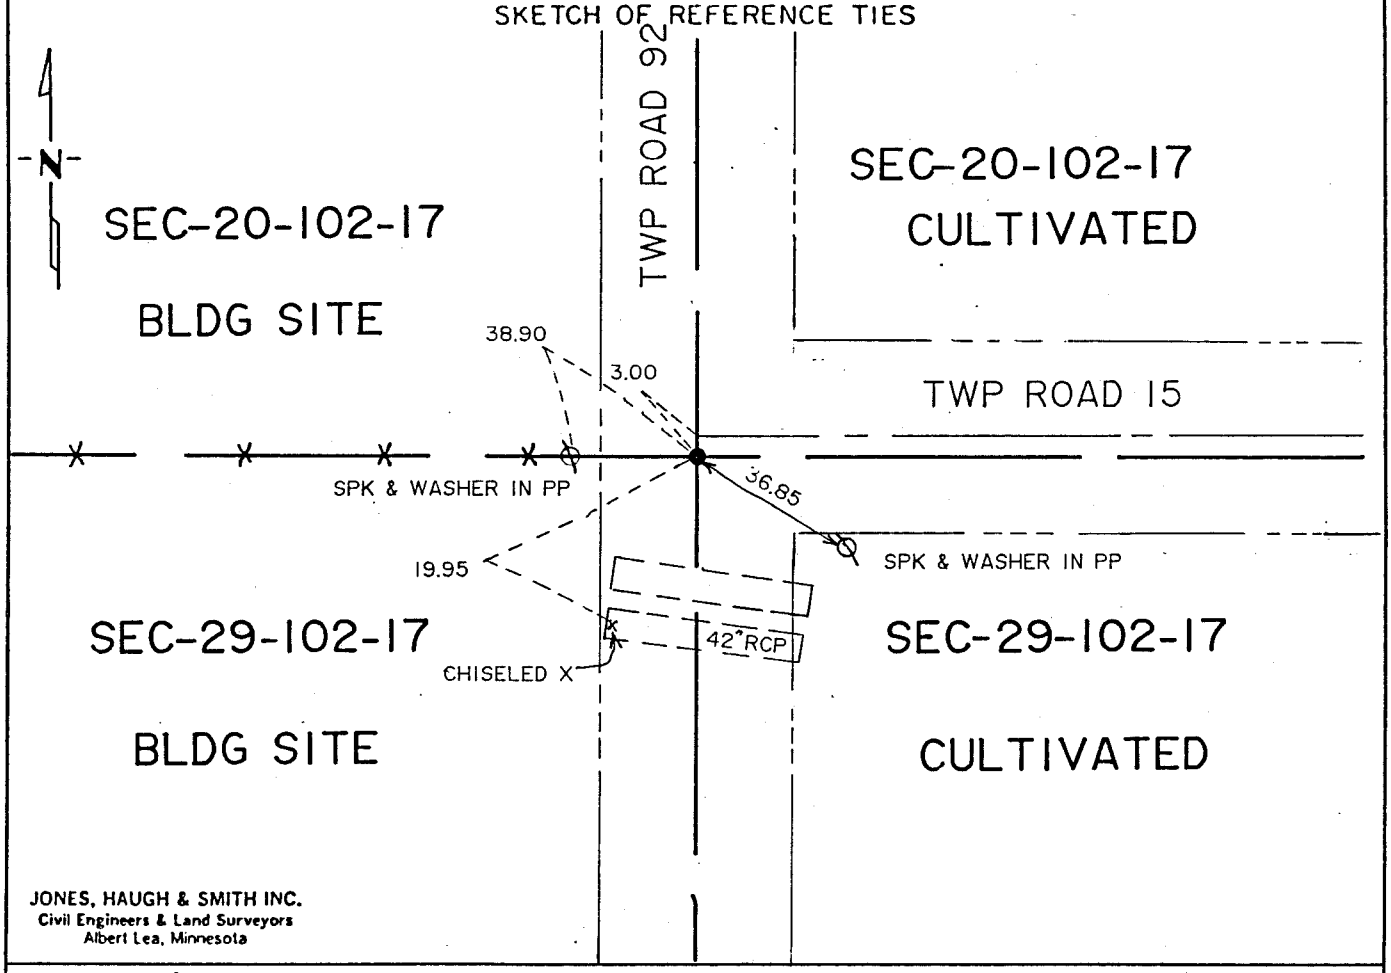

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 11-24-92 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

S 1/4 corner Section 20-102-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench. The following tie was taken:

10" Burr Oak	S 23° W	223 links (147.18 ft)
11" Burr Oak	N 75° W	215 links (141.90 ft)

The following were contacted for section corner information:

Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1884 Clausen's field notes indicate a government post at the S 1/4 corner.

1992 Jones, Haugh & Smith Inc crew, under the direction of John H. Schulte IV, dug with the county backhoe and uncovered a 1/2" diameter x 30" long iron, five inches deep. Continued digging and found no further evidence. Accepted iron as best evidence and set capped RLS No. 13807 iron, four inches under road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 20, Township 102N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 4-29-92 (DATE) found a 1/2 ø x 30" long iron

☐ left monument as found, ☐ lowered monument, ☒ removed monument (explain)

☒ On 4-29-92 (DATE) placed a capped RLS 13807 5/8"ø iron at same location

SKETCH OF REFERENCE TIES

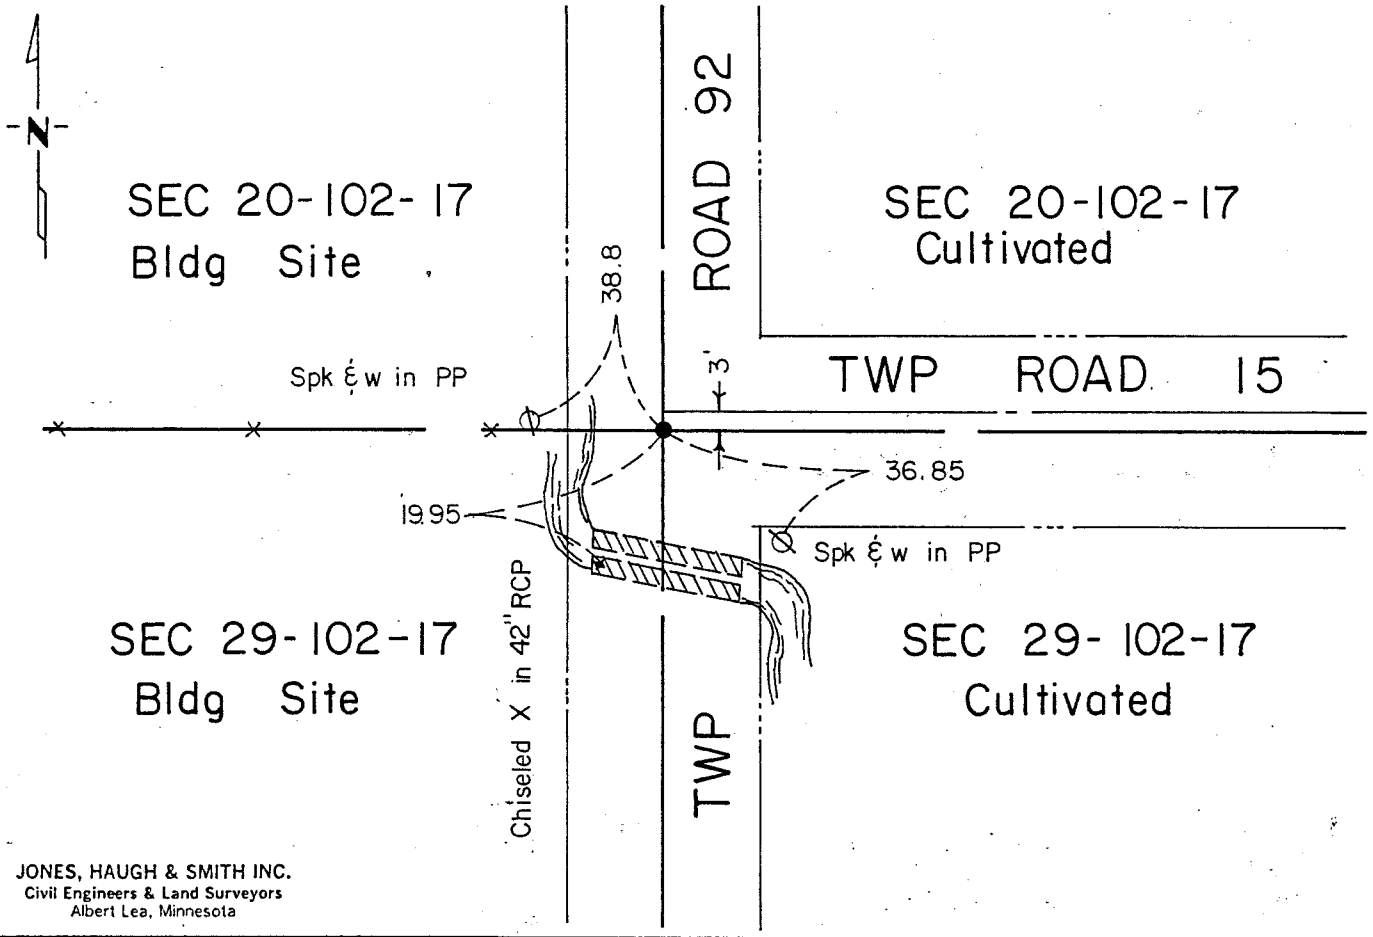

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-20-92

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

S 1/4 corner Section 20-102-17

This corner was originally established by Deputy Surveyor Wm. I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder's Office
Ray Tucker, RLS

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1884 Clausen, County Surveyor, uncovered corner during a survey of the SE 1/4.

1992 Jones, Haugh & Smith Inc crew under the direction of John Schulte RLS, Mower County Surveyor, dug with the County backhoe and uncovered a 1/2" diameter x 30" long pipe. Dug a 5'x12'x4' deep hole and found no further evidence of public land survey corner or a perpetuation thereof. Therefore accepted 1/2" pipe as best evidence and placed a 5/8" diameter iron capped RLS 13807 at same location.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 20, Township 102N, Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 4-30-92 (DATE) found a NO EVIDENCE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 4-30-92 (DATE) placed a CONCRETE NAIL WASHER

SKETCH OF REFERENCE TIES

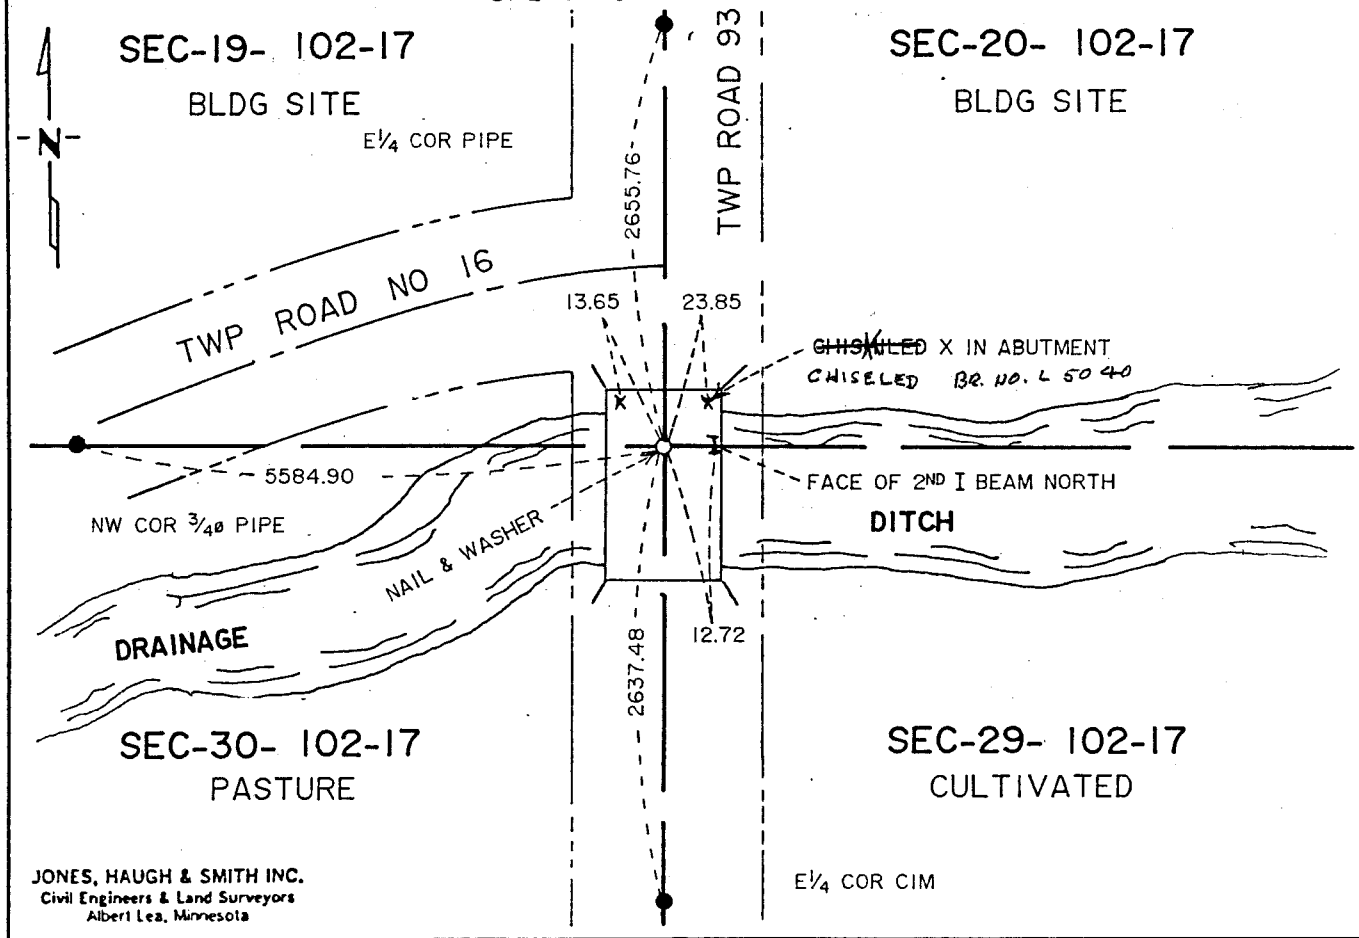

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ (SIGNATURE) 11-24-92 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Section 20-102-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench. The following tie was taken:

Burr Oak	N 15° W	238 links (157.08 ft)
Burr Oak	N 55° E	174 links (114.84 ft)

The following were contacted for section corner information:

Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of a perpetuation of the original public land survey corner.

1992 Jones, Haugh & Smith Inc crew found no evidence of original public land survey corner or bearing trees. Established the corner using obliterated methods as follows: Used centerline of bridge at northeast corner to control east-west position of this corner. Measured north from E 1/4 corner of Section 30 to existing fence line west at northeast corner of the SE 1/4 NE 1/4 Section 30 and found a distance of 1318.74 feet. Doubled this distance and set temporary point on centerline of the bridge for northeast corner. Then measured north from this temporary point to field division west at northeast corner of the SE 1/4 SE 1/4 Section 19 and found distance of 1328 feet more or less. Continued measuring north to E 1/4 corner Section 19 and found 2655.76 feet. We also found the remains of old fence line east on south bank of creek which fits temporary point and the extended centerline of township road to west. Therefore we set concrete nail and washer at temporary point and took ties as shown and accepted this location as best location of the original public land survey corner using existing extrinsic evidence.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 20, Township 102N, Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 4-30-92 (DATE) found a FOUND 4" DIA. WHEEL HUB AND RESET

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 4-30-92 (DATE) placed a 5/8"ø x 16" iron stake monument (Capped RLS 13807) - Placed

SKETCH OF REFERENCE TIES

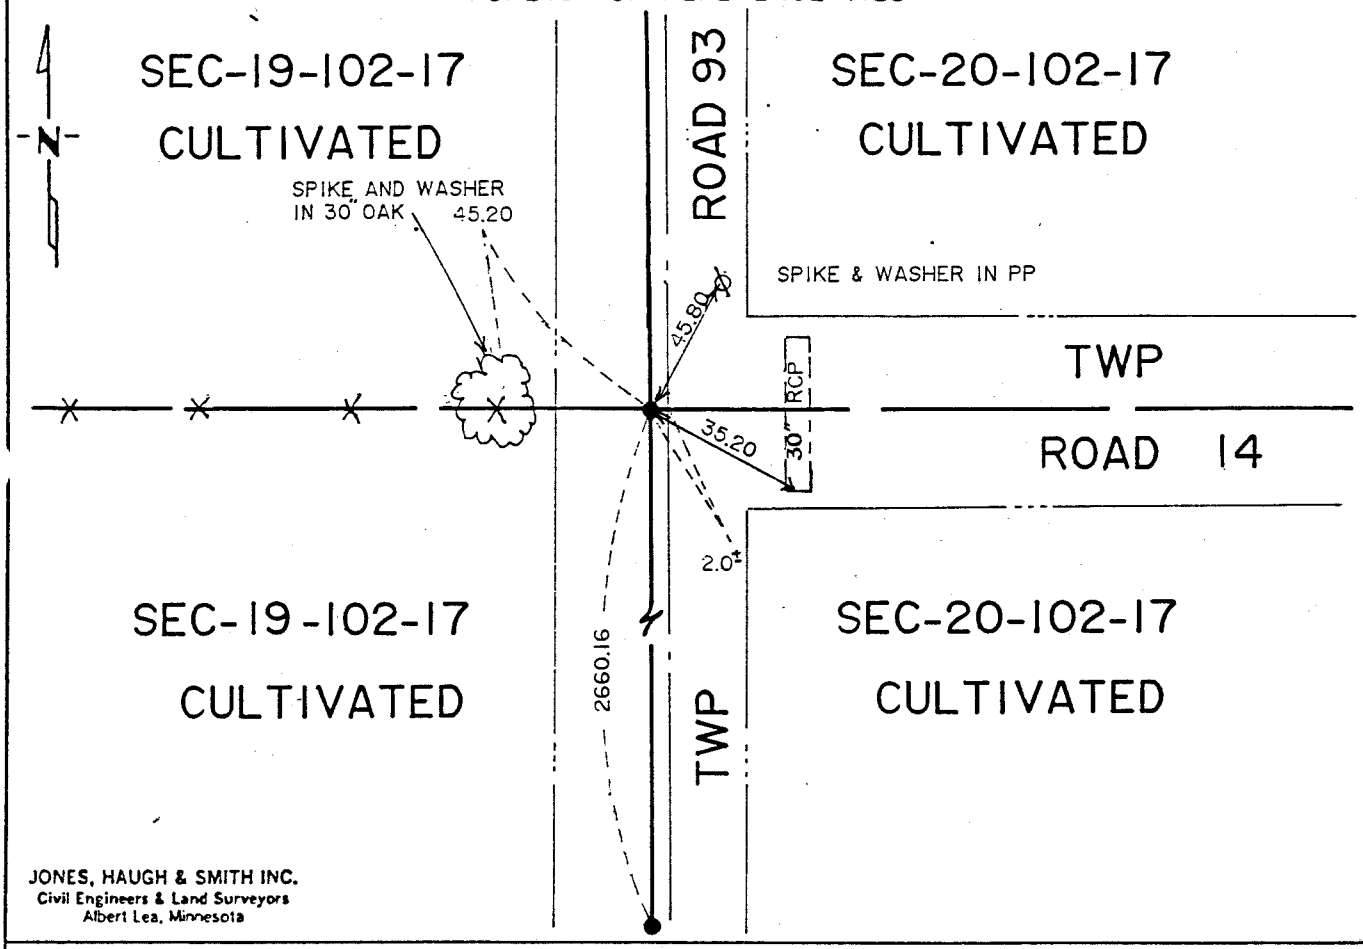

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 11-24-92

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Section 20-102-17

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench. The following ties were taken:

14" Burr Oak	S 5° W	73 links (50.16 ft)
18" Burr Oak	N 46° E	50 links (33.00 ft)

The following were contacted for section corner information:

Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1884 The private field notes of Claussen indicate a government post was uncovered at the W 1/4.

1992 Jones, Haugh & Smith Inc crew, under the direction of John H. Schulte IV, dug on centerline centerline of Township Road T-93 and T-14. Uncovered a 4" diameter cast iron wheel hub two feet deep. We found no further evidence. Re-set hub and set capped RLS 13807 iron over hub at the road surface.

The monument found fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 20, Township 102N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 4-30-92 (DATE) found a Cast iron wheel hub

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 4-30-92 (DATE) placed a capped RLS 13807 5/8" ø iron over hub

SKETCH OF REFERENCE TIES

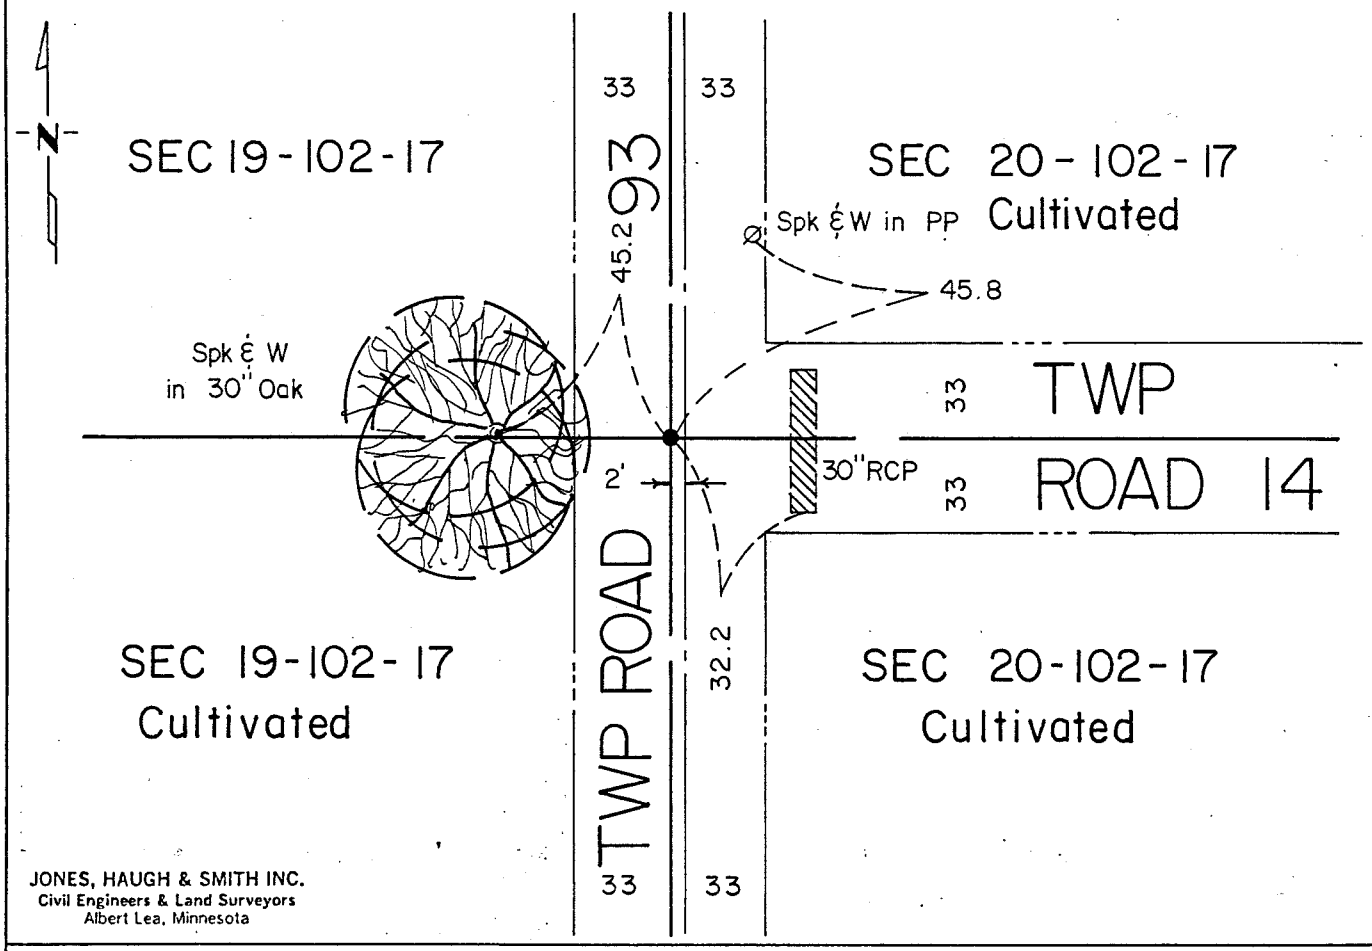

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 5-20-92 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Section 20-102-17

This corner was originally established by Deputy Surveyor Wm. I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder's Office
Ray Tucker, RLS

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1884 Clausen, County Surveyor, uncovered corner during a survey of the SE 1/4.

1992 Jones, Haugh & Smith Inc crew under the direction of John Schulte RLS, Mower County Surveyor, dug on centerline centerline of north-south-east roads and uncovered a 4" diameter cast iron wheel hub 2 feet below road surface in virgin soil. Found no further evidence of public land survey corner or a perpetuation thereof. Therefore accepted wheel hub as best evidence and set a 5/8" diameter iron capped RLS 13807 over hub on road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. 11P

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 21, Township 102 N, Range 17 W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 7-13-87 (DATE) placed a cast iron monument on road surface.

SKETCH OF REFERENCE TIES

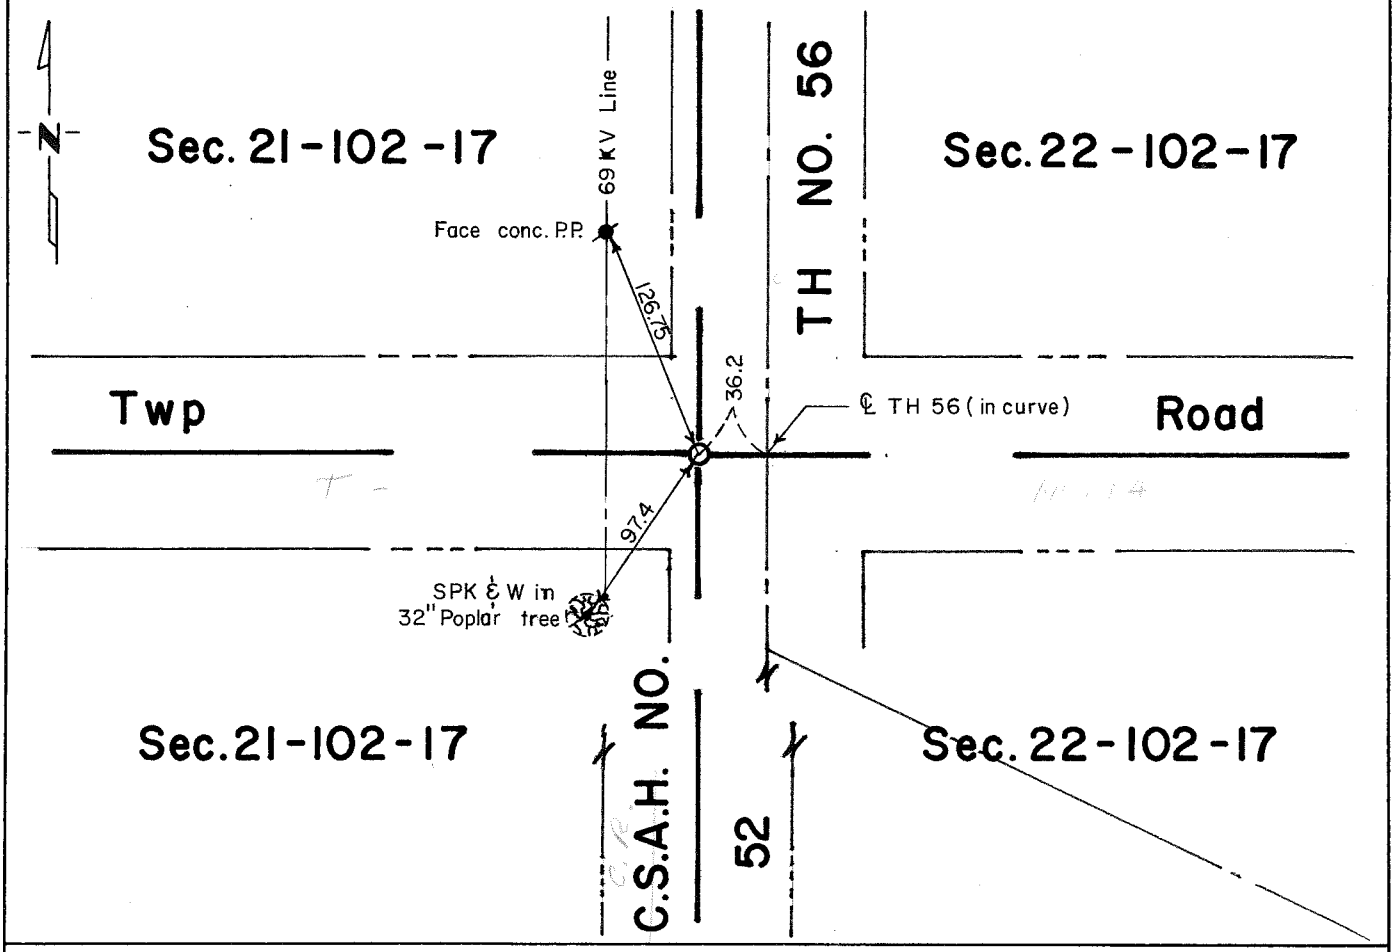

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 12-12-88

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE
$E\frac{1}{4}$ corner Section 21-102-17

This corner was originally established by Deputy Surveyor William I. Anderson of the US General Land Office in 1854. The government notes show this corner was marked with a wood post and the following bearing trees marked:

14" Burr Oak S 16° W 385 Links

The following were contacted for section corner information:

Minnesota Department of Transportation - Rochester
Mower County Engineering Department

1950± Right-of-way stationing map on Trunk Highway No. 56 shows corner at intersection of road centerlines east-west-south, 37.6 feet west of centerline point of termination at Sta 184+86.6.

1980 Jones, Haugh & Smith crew during power line survey found no evidence of corner. Therefore established position of corner using information of Trunk Highway No. 56 right-of-way stationing map and set spike and washer.

1987 Jones, Haugh & Smith crew found a spike and washer set in 1980. Removed spike and set a cast iron monument.

The monument set fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact firm of Jones, Haugh & Smith

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 21, Township 102N, Range 17 W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 7-13-87 (DATE) found a 3/4" ø iron at road surface.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 7-13-87 (DATE) placed a cast iron monument on road surface over iron found.

SKETCH OF REFERENCE TIES

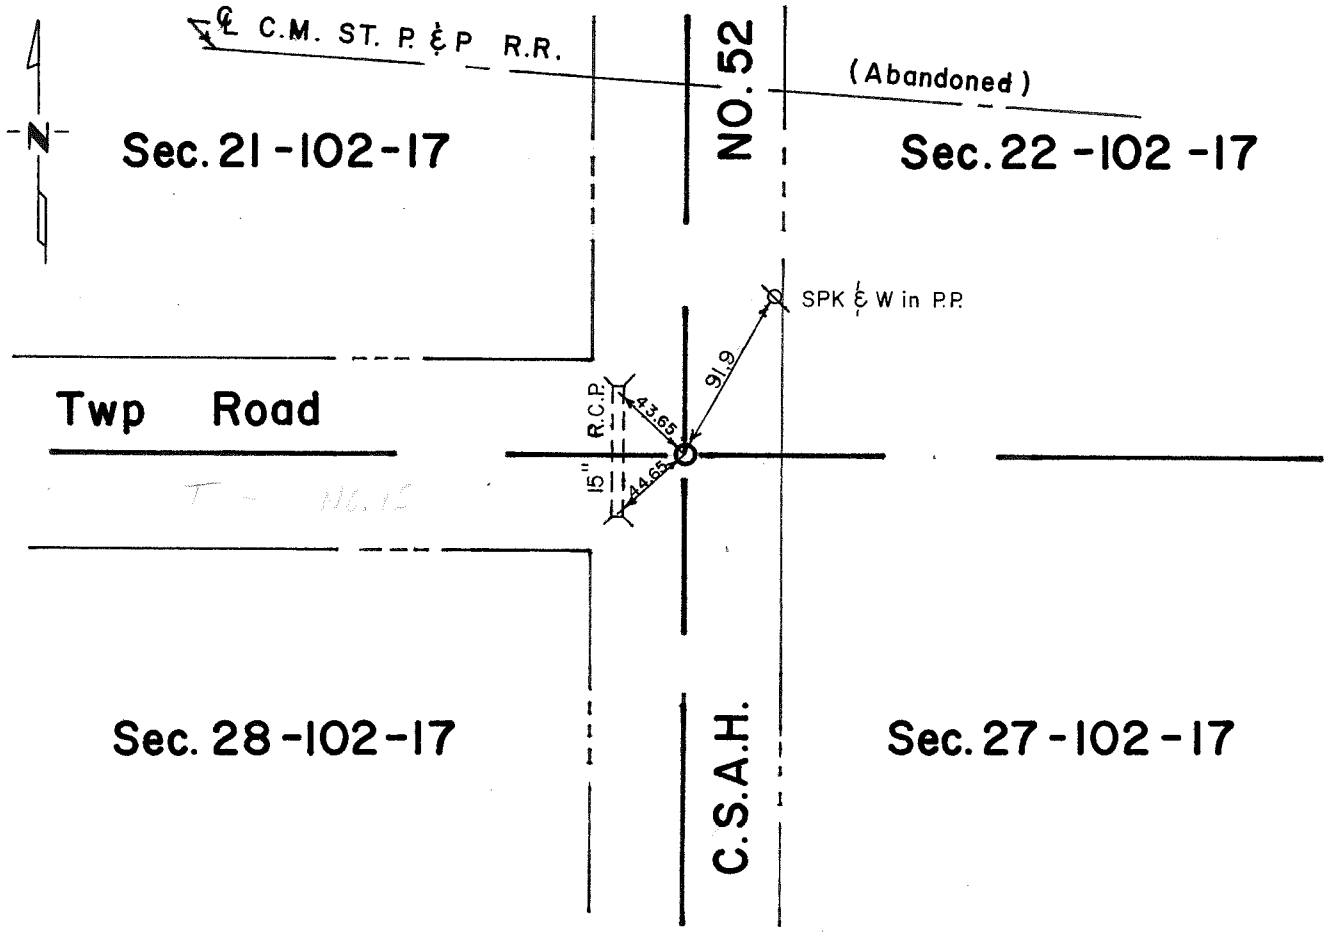

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 12-12-88

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE
SE corner Section 21-102-17

This corner was originally established by Deputy Surveyor William I. Anderson of the US General Land Office in 1854. The government notes show this corner was marked with a wood post and charred stake with mound and trench.

The following were contacted for section corner information:

Minnesota Department of Transportation - Rochester
Mower County Engineering Department

1950± Trunk Highway No. 56 right-of-way stationing map show corner on centerline of roads north-south-west and in line with fence east 789.8 feet south of the centerline of Chicago, Milwaukee, St. Paul & Pacific Railroad.

1980 Jones, Haugh & Smith crew during a power line survey uncovered a 3/4" diameter iron on centerline centerline of roads which agreed with records which agreed with records from Minnesota Department of Transportation.

1987 Jones, Haugh & Smith crew uncovered a 3/4" diameter iron and set a cast iron monument over iron found.

The monument found agrees with records from Minnesota Department of Transportation and fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact firm of Jones, Haugh & Smith