Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

CENTER Corner of Section 22, Township 102 Range 17, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 7/25/95 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 7/25/95 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

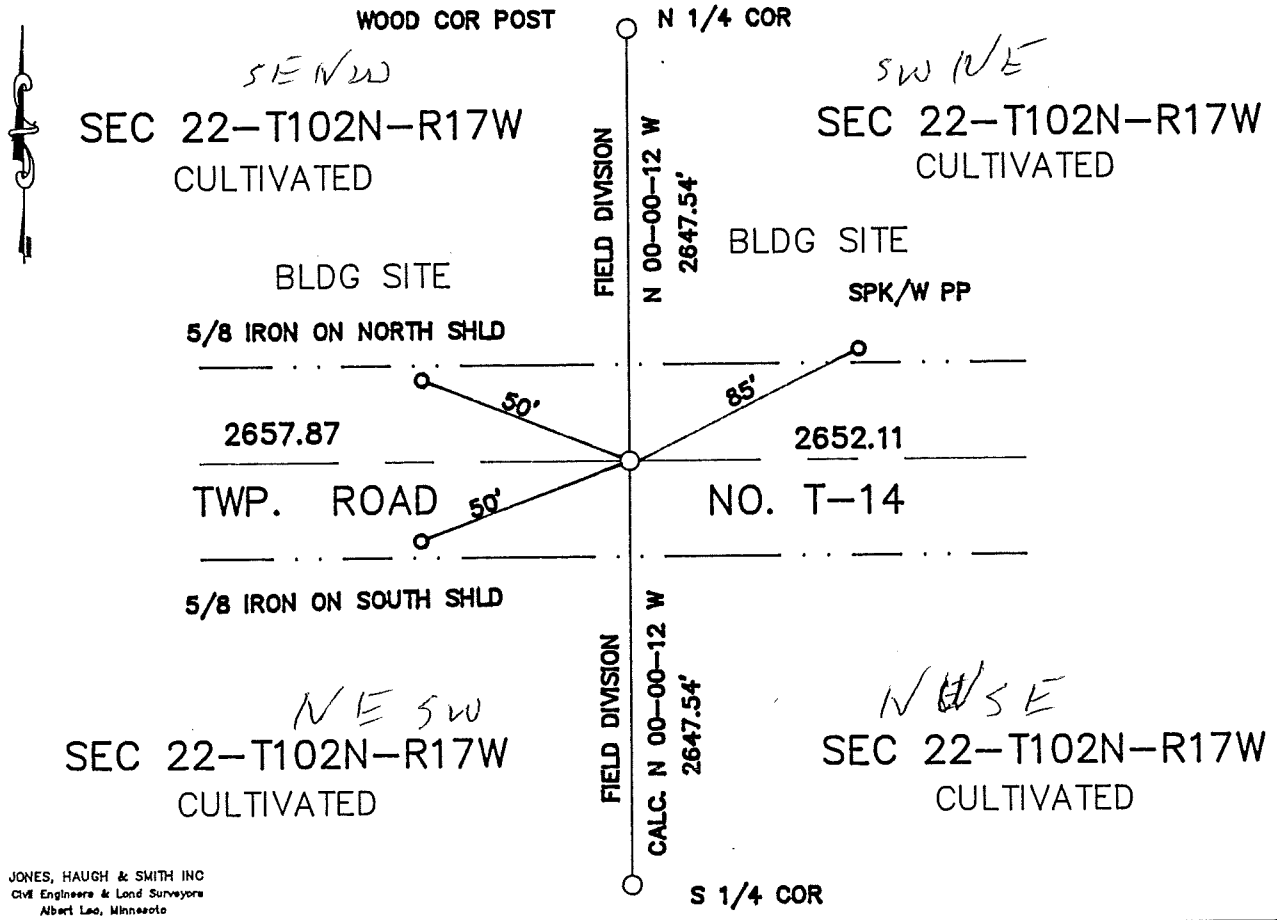

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-5-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 p .M. on the 8 day of Jan A.D., 1996

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 441813

M.H.D. FORM NO. 2105

BOOK 90 PAGE 9 Book 90 Misc Page 9

Center SEC 22-102-17

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones, Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, placed a cast iron monument at the intersection of straight lines between the E-W and N-S 1/4 sec lines. The corner set fit fence line N-S and CL E-W road.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 22, Township 102 Range 17, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 7-25-95 (DATE) found a WOODEN POST

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 7-25-95 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

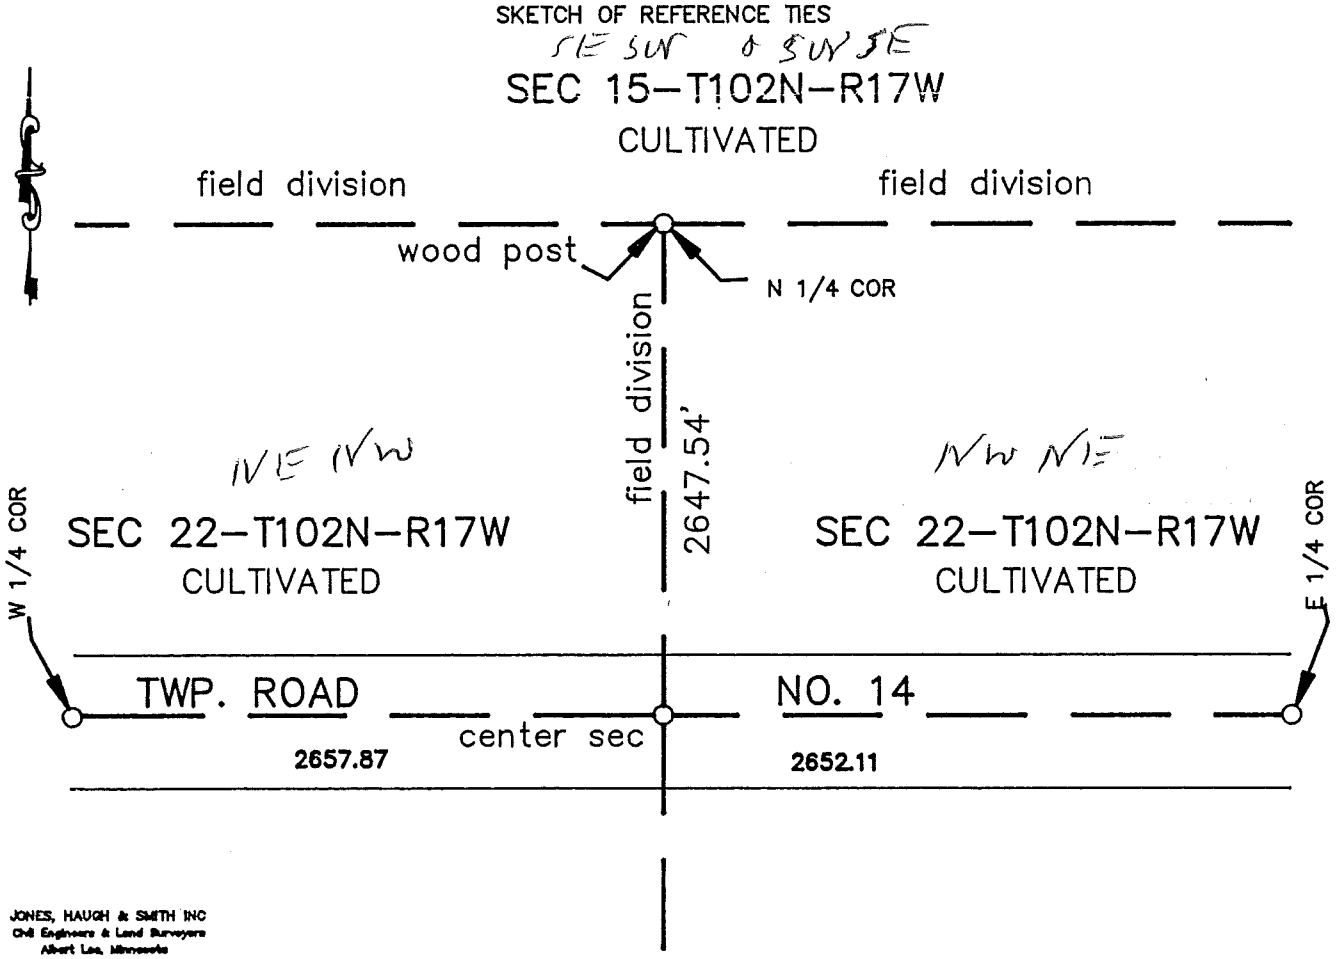

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 11-1-95

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 3 day of Nov A.D., 1995

COUNTY RECORDER Charles Enge

By Susan M Davis, Deputy

DOCUMENT NO. 140541

M.H.D. FORM NO. 2105 BOOK 89 PAGE 141 Book 89 Misc Page 141

N 1/4 Cor SEC 22-102-17

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, set a 5/8"x16" iron pin with cast iron monument over it. On east side of CFP (center fence post) which fits field divisions E-W and South and testimony by local farmers stating that this post was set in place of the old CFP when the fence line was removed.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 23, Township 102N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 08/25/1997 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

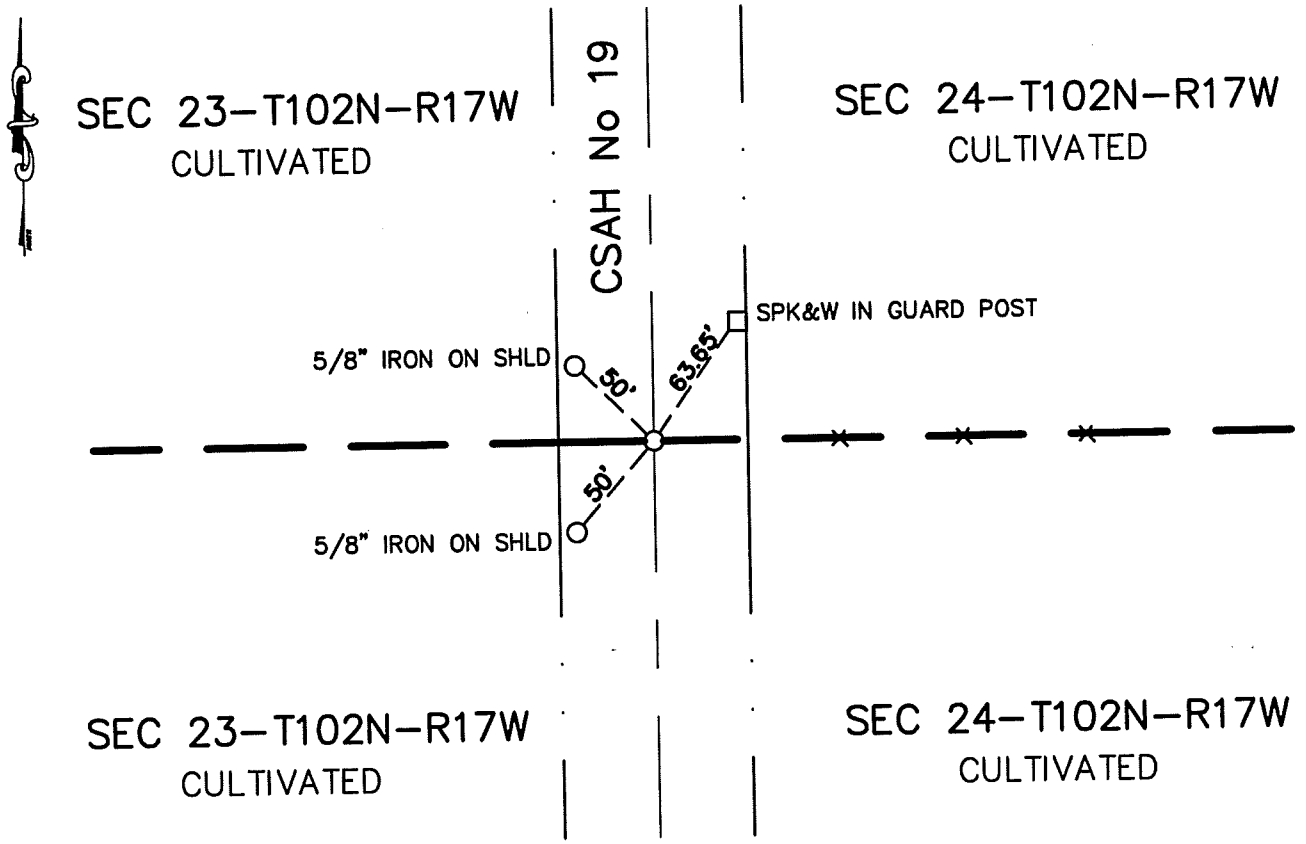

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 10-5-00 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

E 1/4 Cor SEC 23-102-17

Deputy Surveyor William Anderson of the U.S. General Land Office originally established this corner in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1997 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with the county backhoe at the centerline of CSAH No. 19 N-S and in line with field division east. Dug at a distance of 2647.00' south from the NE section corner. Dug to virgin soils and found no evidence of original PLS corner. Placed a cast iron monument at above-mentioned distance.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 23, Township 102N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 08/25/1997 (DATE) found a ROCK

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 08/25/1997 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

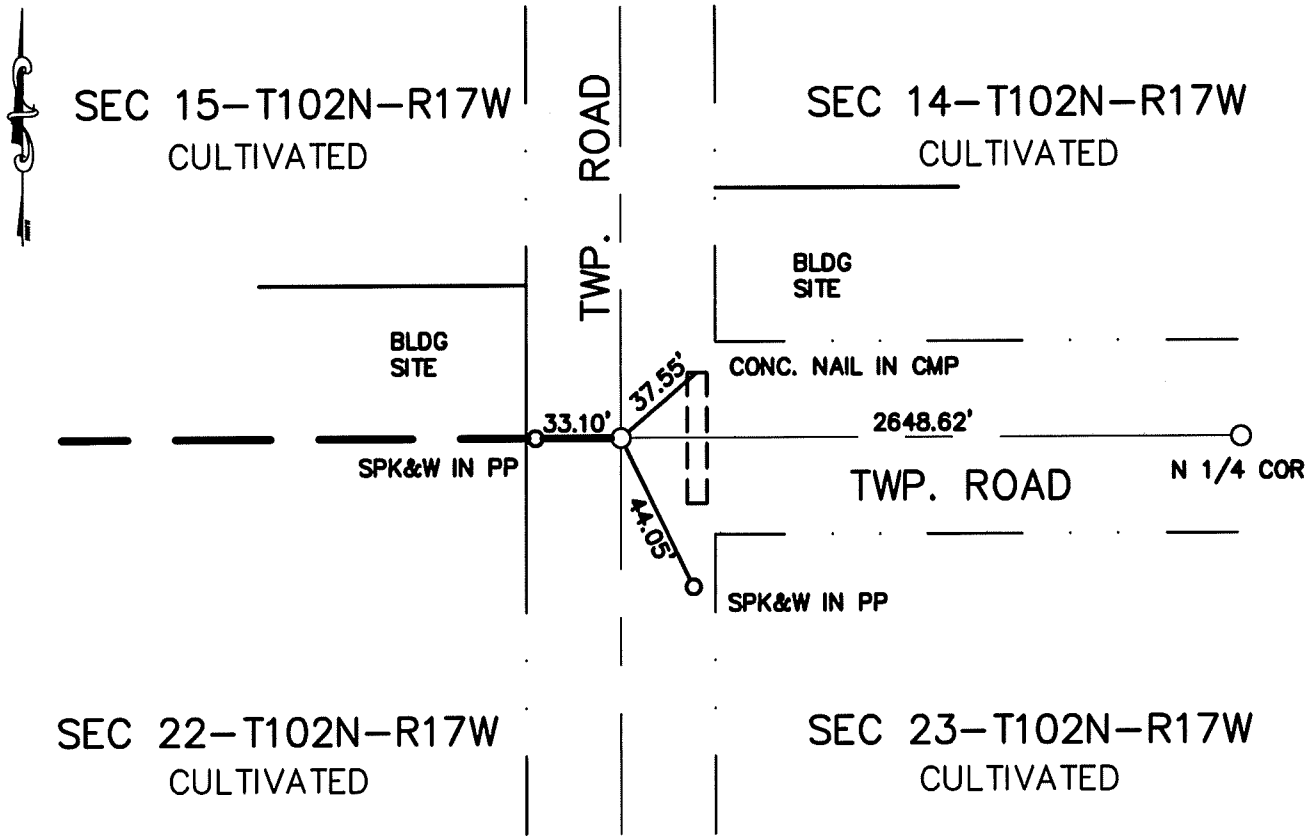

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ 10-5-00
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

NW Cor SEC 23-102-17

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1997 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with the county backhoe at the intersection of township road N-S and township road east. Uncovered large rock 2.5' below road surface. Accepted rock as true corner and placed a 5/8" iron capped 13807 on the north side of rock. Placed a cast iron monument over rock 0.4' deep.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 23, Township 102N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 08/25/1997 (DATE) found a CONC. MONUMENT, 1/2" IRON

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 08/25/1997 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

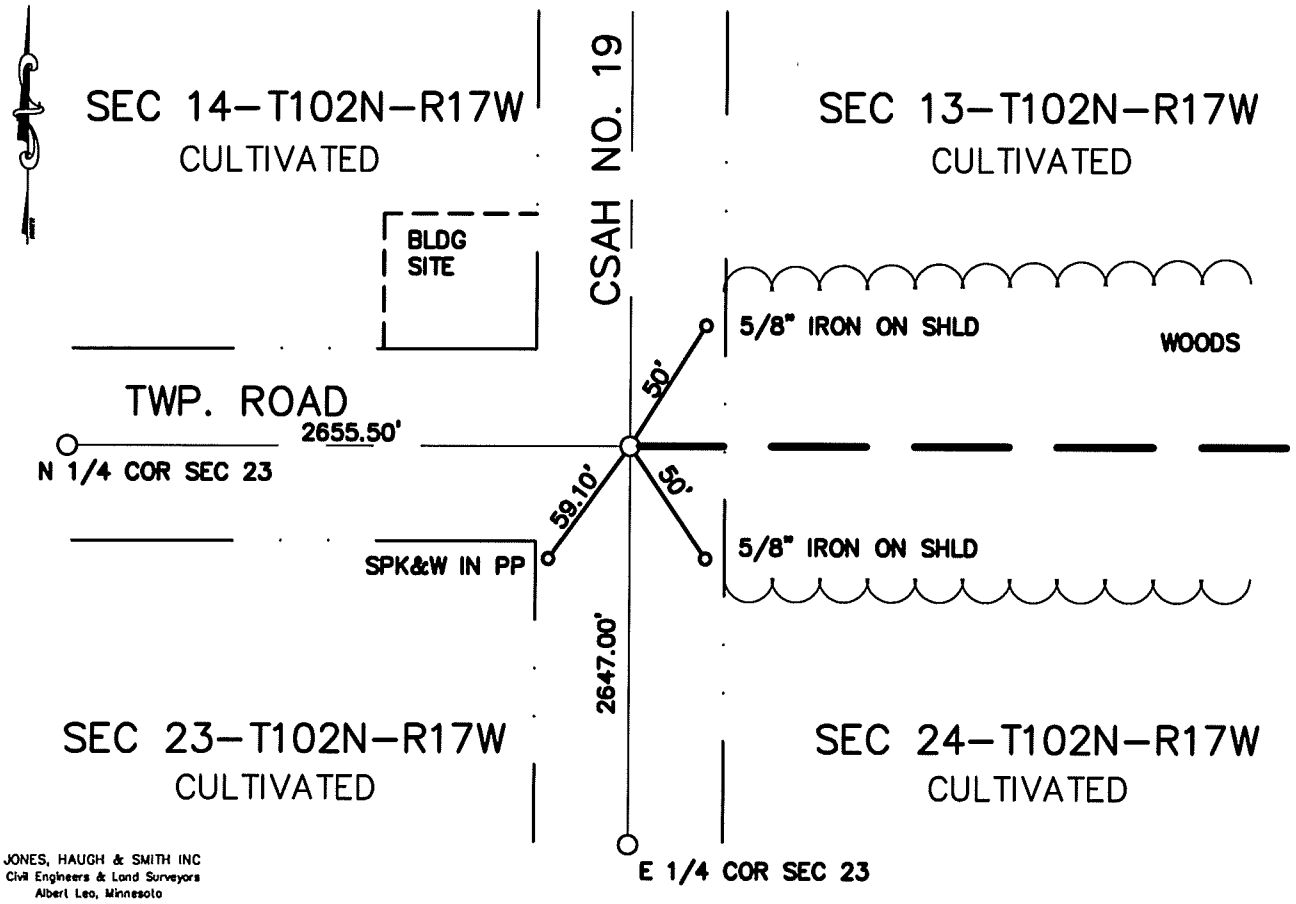

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 10-5-00 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

NE Cor SEC 23-102-17

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1997 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with the county backhoe at the intersection of CSAH No. 19 N-S and township road west. Uncovered a concrete monument with a 1/2" iron at a depth of 3.5'. Placed a cast iron monument over concrete monument found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 23, Township 102N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 08/25/1997 (DATE) found a CONC. MONUMENT, 1/2" IRON

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 08/25/1997 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

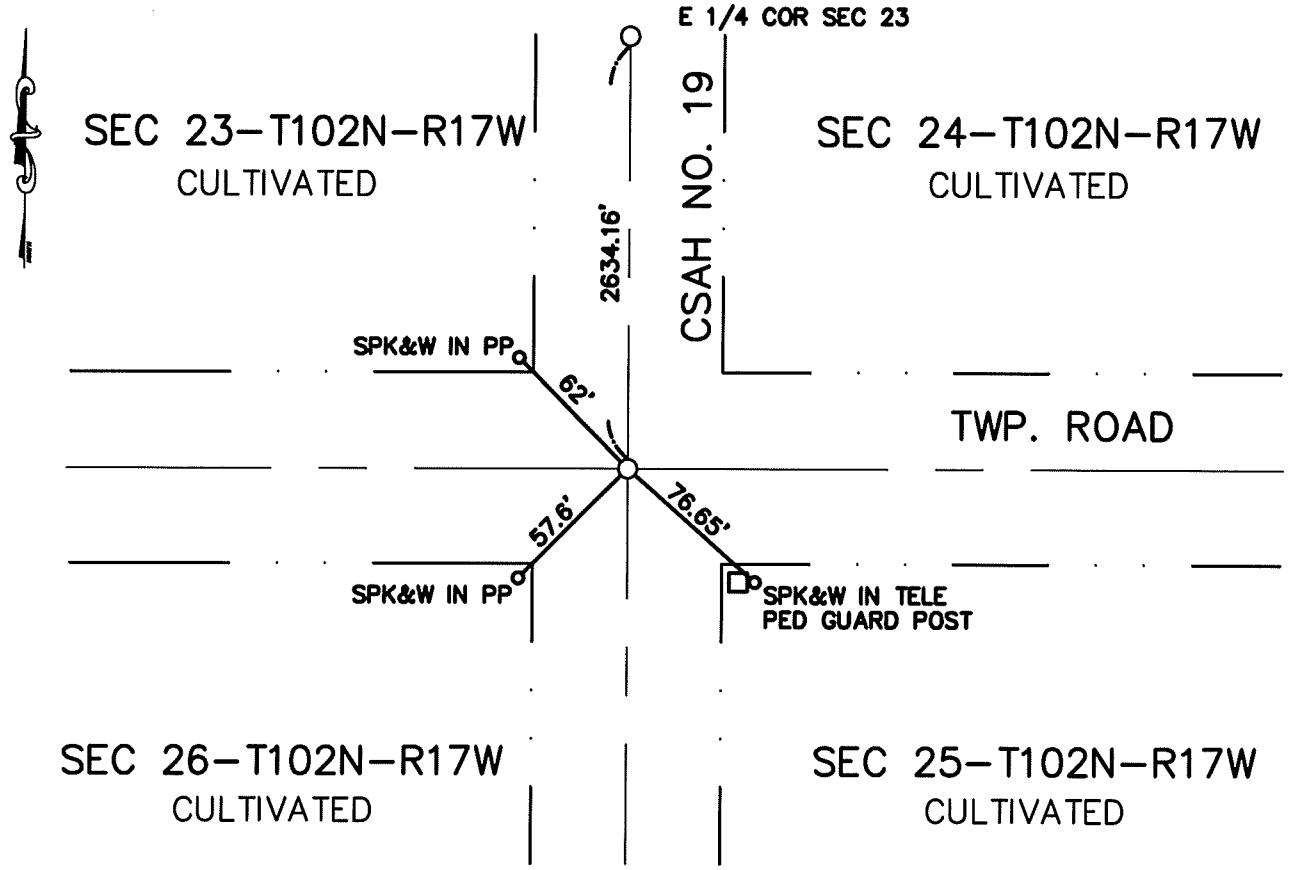

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 10-5-00

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

SE Cor SEC 23-102-17

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1997 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with the county backhoe at the intersection of CSAH No. 19 N-S and township road E-W. Uncovered a concrete monument with a 1/2" iron in monument. Placed a 5/8" iron capped 13807 on the north side of monument found. Placed a cast iron monument over monuments found at road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 23, Township 102N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 08/25/1997 (DATE) found a ROCK

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 08/25/1997 (DATE) placed a 5/8" IRON WITH C.I.M. OVER ROCK FOUND

SKETCH OF REFERENCE TIES

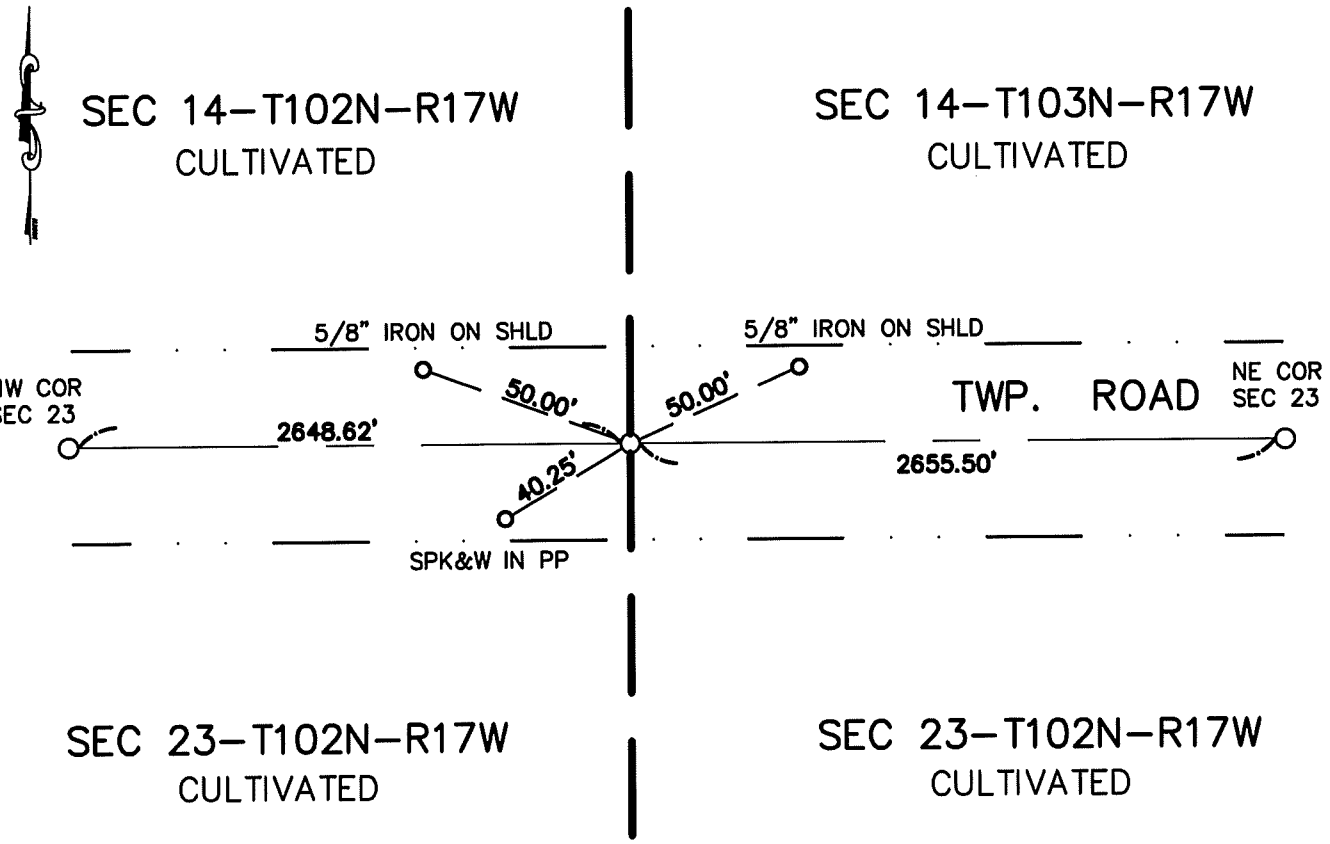

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 10-5-00

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

N 1/4 Cor SEC 23-102-17

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1997 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with the county backhoe at the centerline of township road E-W and field division north. Uncovered a rock. Accepted rock as true PLS corner and placed a 5/8" iron capped 13807 on the north side of rock found. Placed a cast iron monument at road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 26, Township 102N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-9-91 (DATE) found a 5/8"Ø iron over a harrison monument over a 2"x1/4"x30" long iron bar 4' deep in virgin soil.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-9-91 (DATE) placed a cast iron monument on road surface over iron bar found.

SKETCH OF REFERENCE TIES

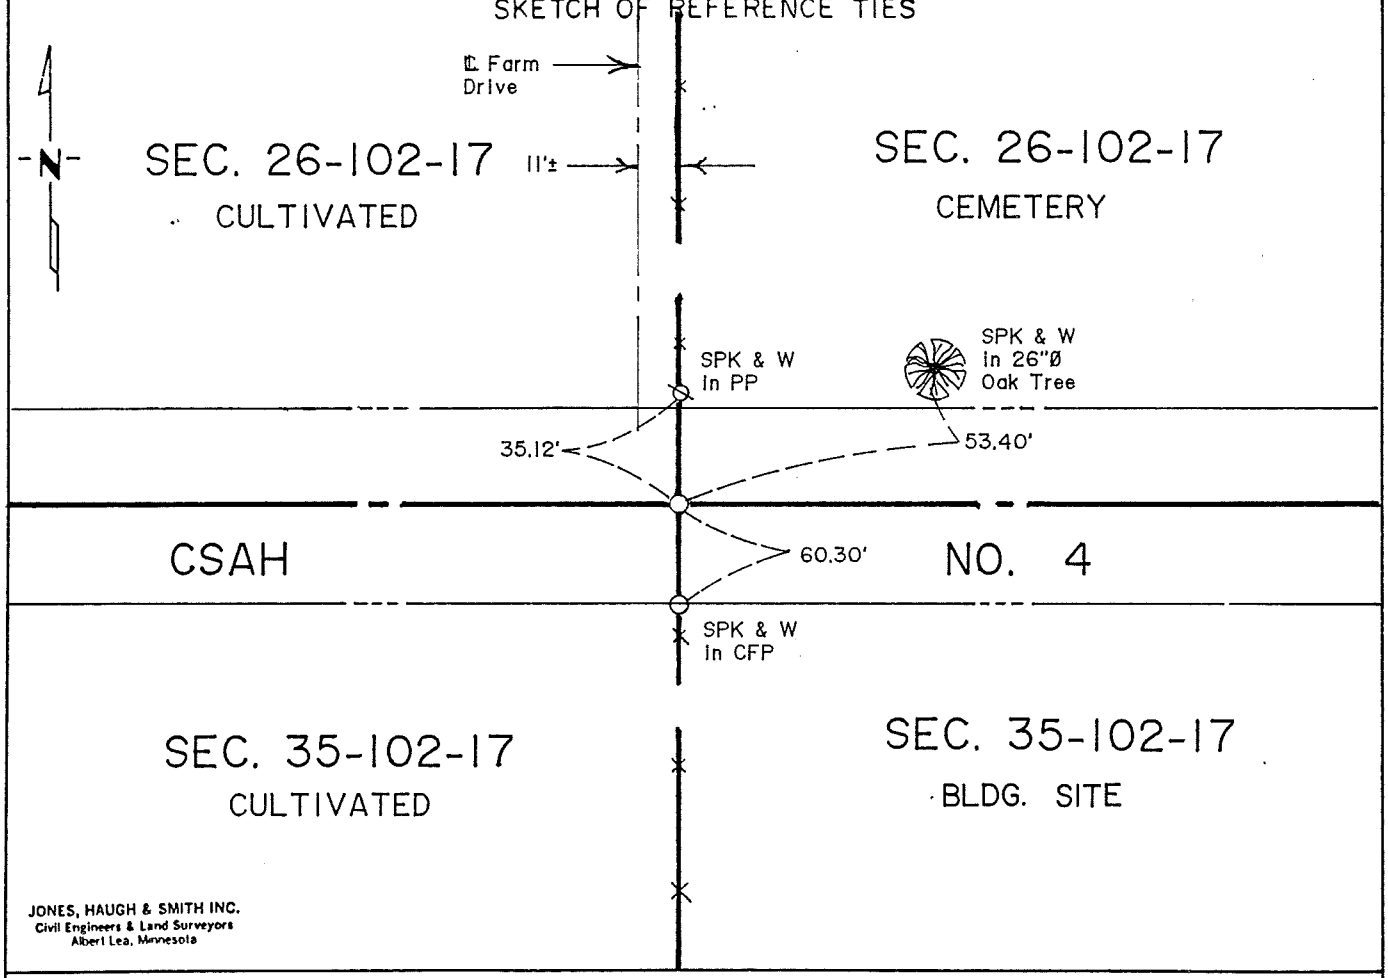

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] 5-16-91
SIGNATURE DATE

Registration No. 13607

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

S 1/4 corner Section 26-102-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench. The following ties were taken:

8" Burr Oak	N 65° E	80 links (52.8 ft)
6" Burr Oak	S 10° E	95 links (62.7 ft)

The following were contacted for section information:

Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner:

1892 Clausen, Mower County Surveyor 1880-1892, field notes show inplace a 26" x 1 1/4" x 1/2" iron and a government post 9.4' north of a straight line.

1976 Jones, Haugh & Smith Inc crew used County ties to locate corners. Placed a P.K. nail on centerline of E-W road in line with fence south.

1977 Jones, Haugh & Smith Inc crew uncovered a cast iron monument. Placed a 5/8" diameter iron over monument found.

1977 Jones, Haugh & Smith Inc crew found a 5/8" diameter iron during survey in E 1/2 SW 1/4 in Section 26-102-17.

1984 Jones, Haugh & Smith Inc crew found a 5/8" diameter iron 0.3' below surface on centerline of E-W road in line with fence south.

1991 Jones, Haugh & Smith Inc crew, under the direction of John H. Schulte, dug with the Mower County backhoe on centerline of E-W road in line with N-S fences for bituminous overlay project SAP 50-604-18. Dug a 4' x 6' x 5' deep hole and found a 5/8" diameter iron 0.5' deep over a harrison cast iron monument 2' below road surface. Continued digging and uncovered a 2" x 1/4" x 30" long iron bar 4' deep in virgin soil. Set a cast iron monument on road surface over iron bar.

The monument fits and agrees with past records and occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 27, Township 102N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-9-91 (DATE) found a large pointed field stone 4' deep in virgin soil on ℄ of E-W road

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-9-91 (DATE) placed a 5/8"Ø iron on West side of stone found and a cast iron monument over at road surface.

SKETCH OF REFERENCE TIES

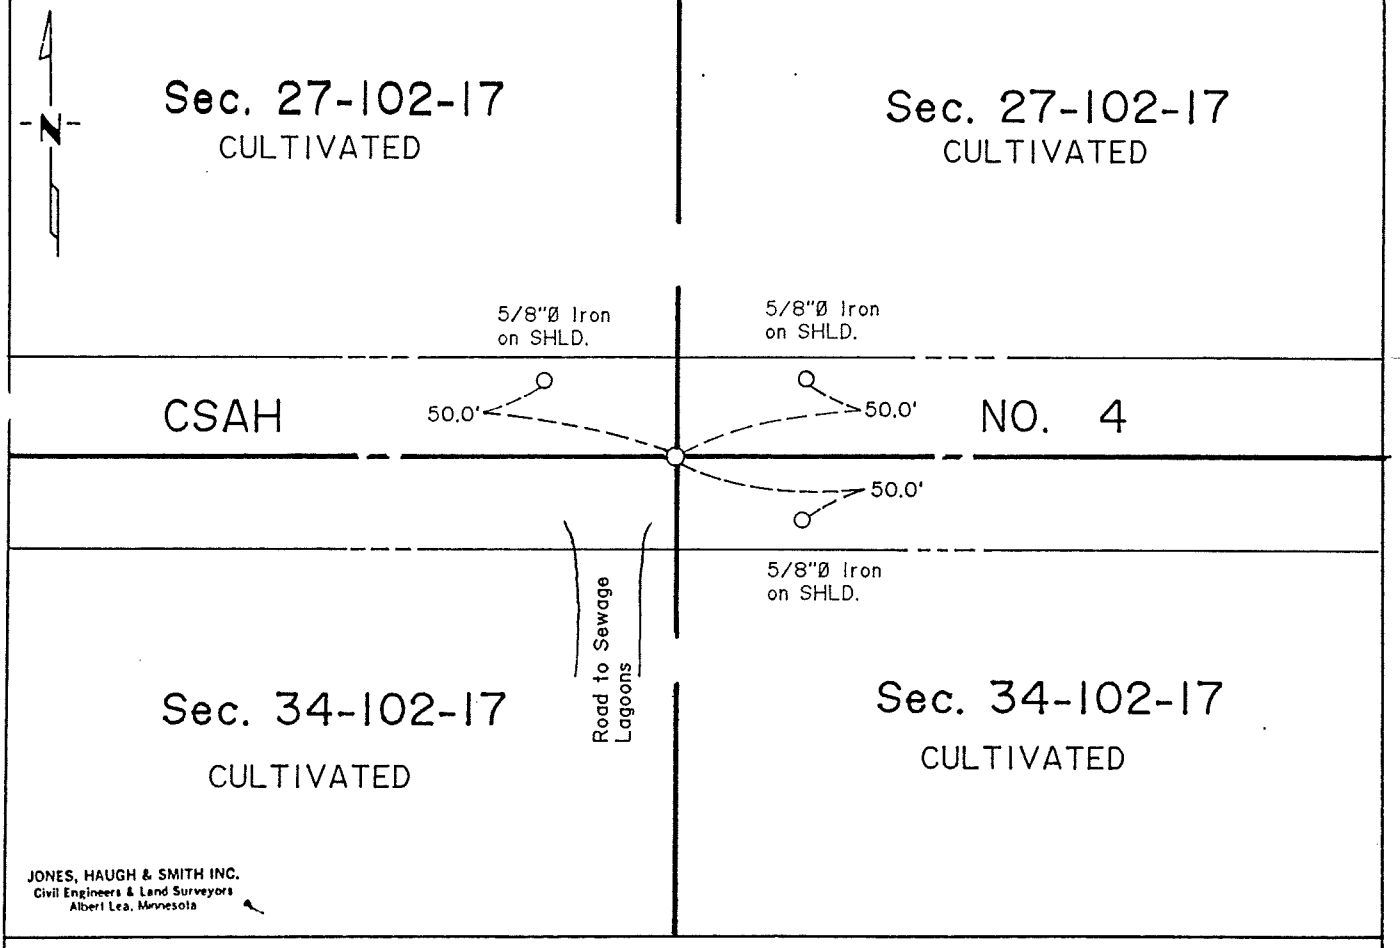

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-16-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

S 1/4 corner Section 27-102-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post and a charred stake were set with a mound of earth and trench.

The following were contacted for section corner information:

Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner:

1890 Clausen, County Surveyor 1880-1892, field notes show a government post inplace.

1930 Book "A" in the Mower County Engineering Office shows a corner inplace at Sta. 204+59.3. The following ties were taken:

48.3' SE to CFP
32.5' W to "Big 4" Rock.
64.5' SW to Oak tree.

1991 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte, dug with the Mower County backhoe on centerline of E-W road for bituminous overlay project #SAP 50-604-18. Dug a 4' x 20' x 4' deep hole and 4 feet more or less East of midpoint. Uncovered a large pointed field stone in virgin soil. Continued digging and found no further evidence of PLS corner. Placed a 5/8" diameter x 18" long iron on the west side of the stone and set a cast iron monument over stone on road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 27, Township 102N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 11/25/1995 (DATE) found a 3" DIAMETER PIPE IN CONCRETE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a –

SKETCH OF REFERENCE TIES

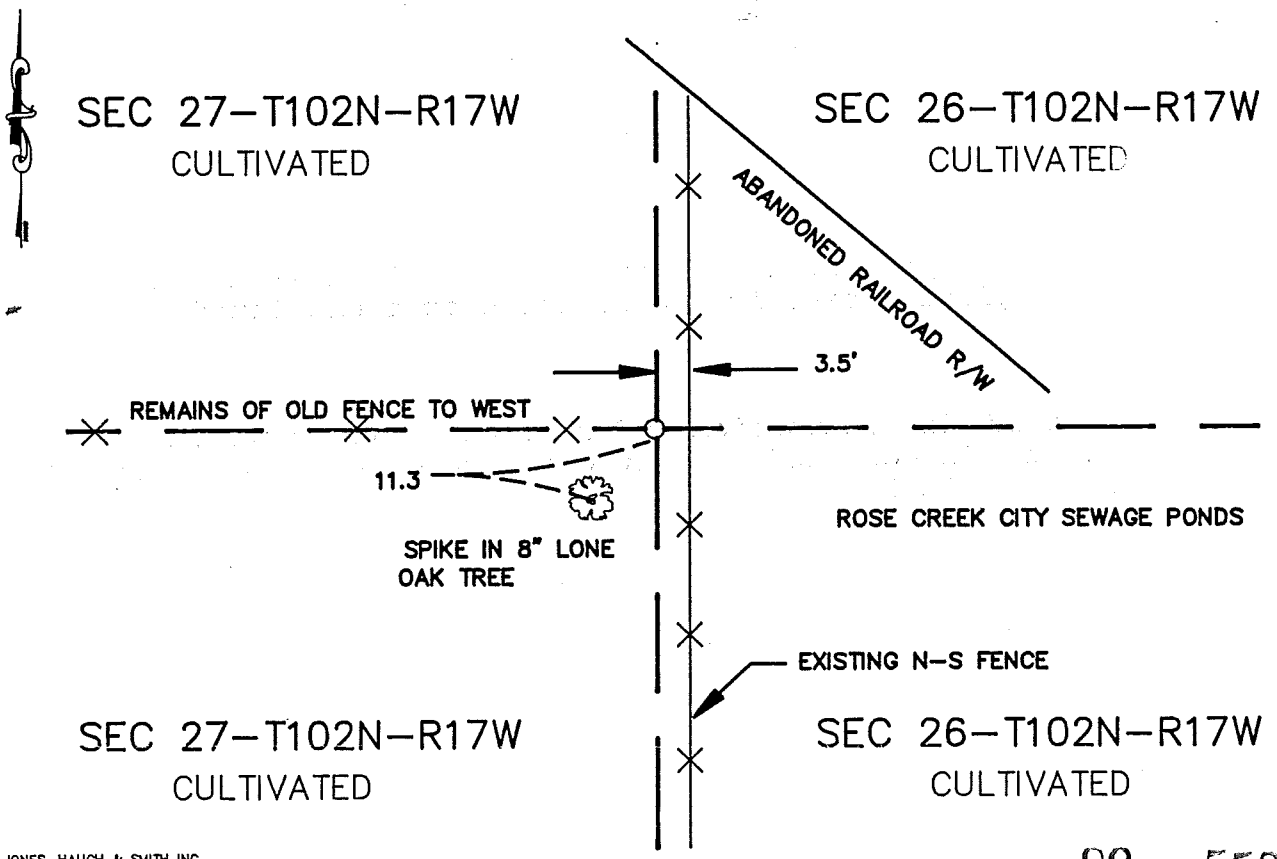

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 89 PAGE 552

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 12-27-95 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 p .M. on the 2 day of Jan A.D., 19 96

COUNTY RECORDER Charles Enger

By Susan M Davis, Deputy

DOCUMENT NO. 441688

M.H.D. FORM NO. 2105

Book 89 Misc Page 552

E 1/4 Cor SEC 27-102-17

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones, Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, found a 3" pipe in concrete at intersection of fence lines E-N-S.

1995 Roger Brand found 3" pipe in conc. and took ties as shown.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 27, Township 102N, Range 17W, 5th P.M.

TATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-9-91 (DATE) found a harrison cast iron monument 1' below road surface over a 5"Ø concrete monument with 1/2"Ø iron in center.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-9-91 (DATE) placed a cast iron monument on road surface over concrete monument found.

SKETCH OF REFERENCE TIES

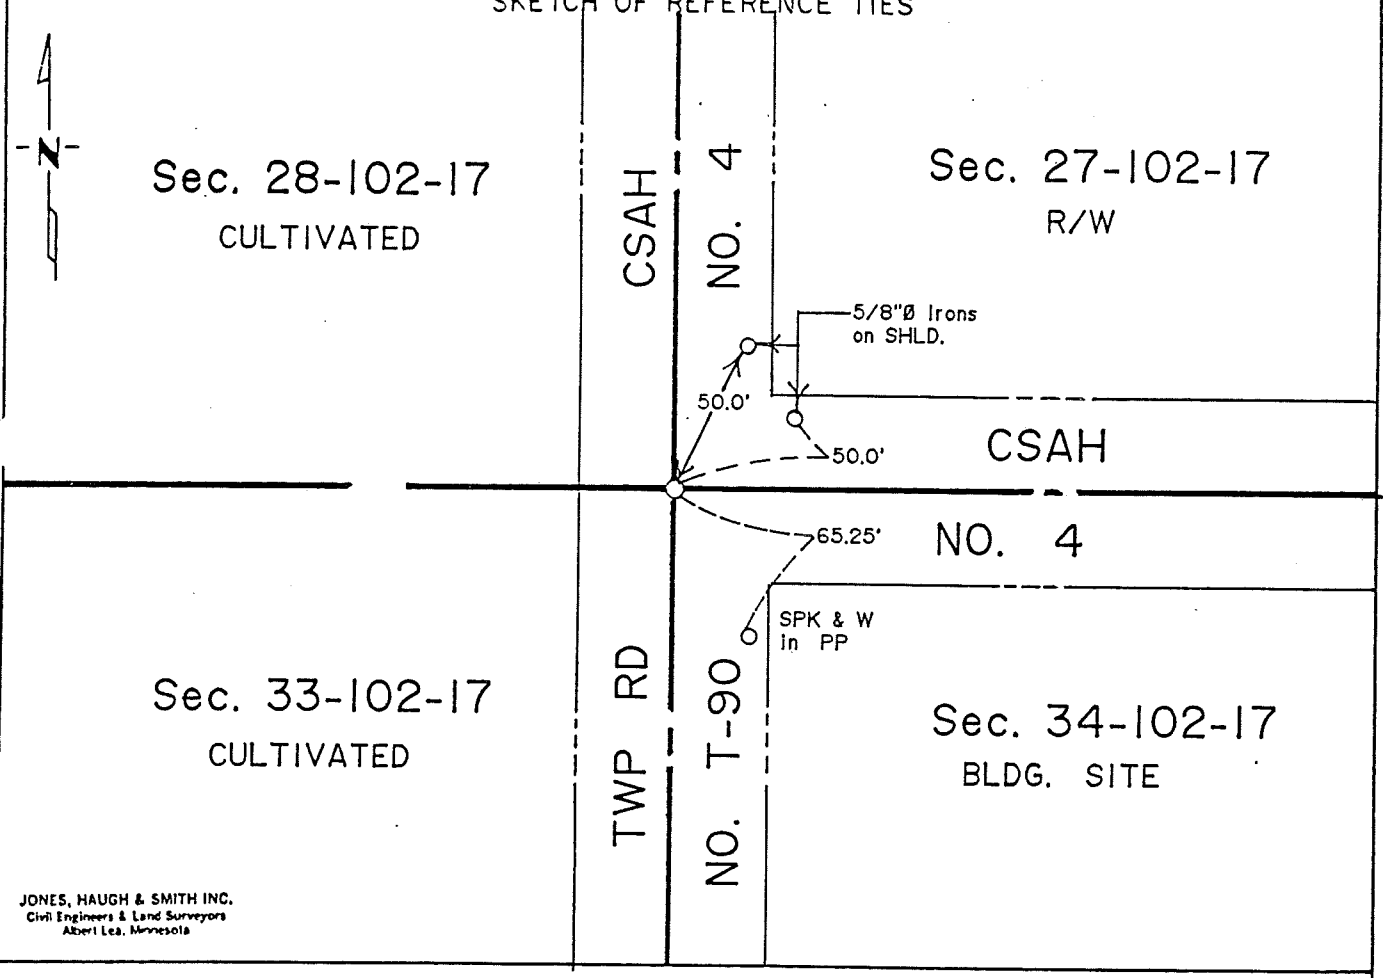

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-16-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Sec 27-102-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post and charred stake were set with a mound of earth and trench.

The following were contacted for section information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1890 Clausen, Mower County Surveyor 1880-1892, field notes show a government post inplace.

1930 Book "A" in the Mower County Engineering Office shows a corner inplace at Sta 240+59.3. The following ties were taken:

48.3' SE to CFP
32.5' W to "Big 4" rock
64.5' SW to Oak tree

1991 Jones, Haugh & Smith Inc crew, under the direction of John H. Schulte IV, dug with the County backhoe on centerline of north-south-east road for bituminous overlay project SAP 50-604-18. Dug a 4'x8'x6' deep hole and uncovered a harrison cast iron monument 1.0 feet below the surface. Continued digging and found a 5" diameter concrete monument with a 1/2" diameter iron center 3 feet deep in virgin soil. Placed a cast iron monument on road surface over the concrete monument found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 27, Township 102N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-7-91 (DATE) found a harrison cast iron monument over a 5"Ø concrete monument in clay tile.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-7-91 (DATE) placed a cast iron monument over concrete monument found.

SKETCH OF REFERENCE TIES

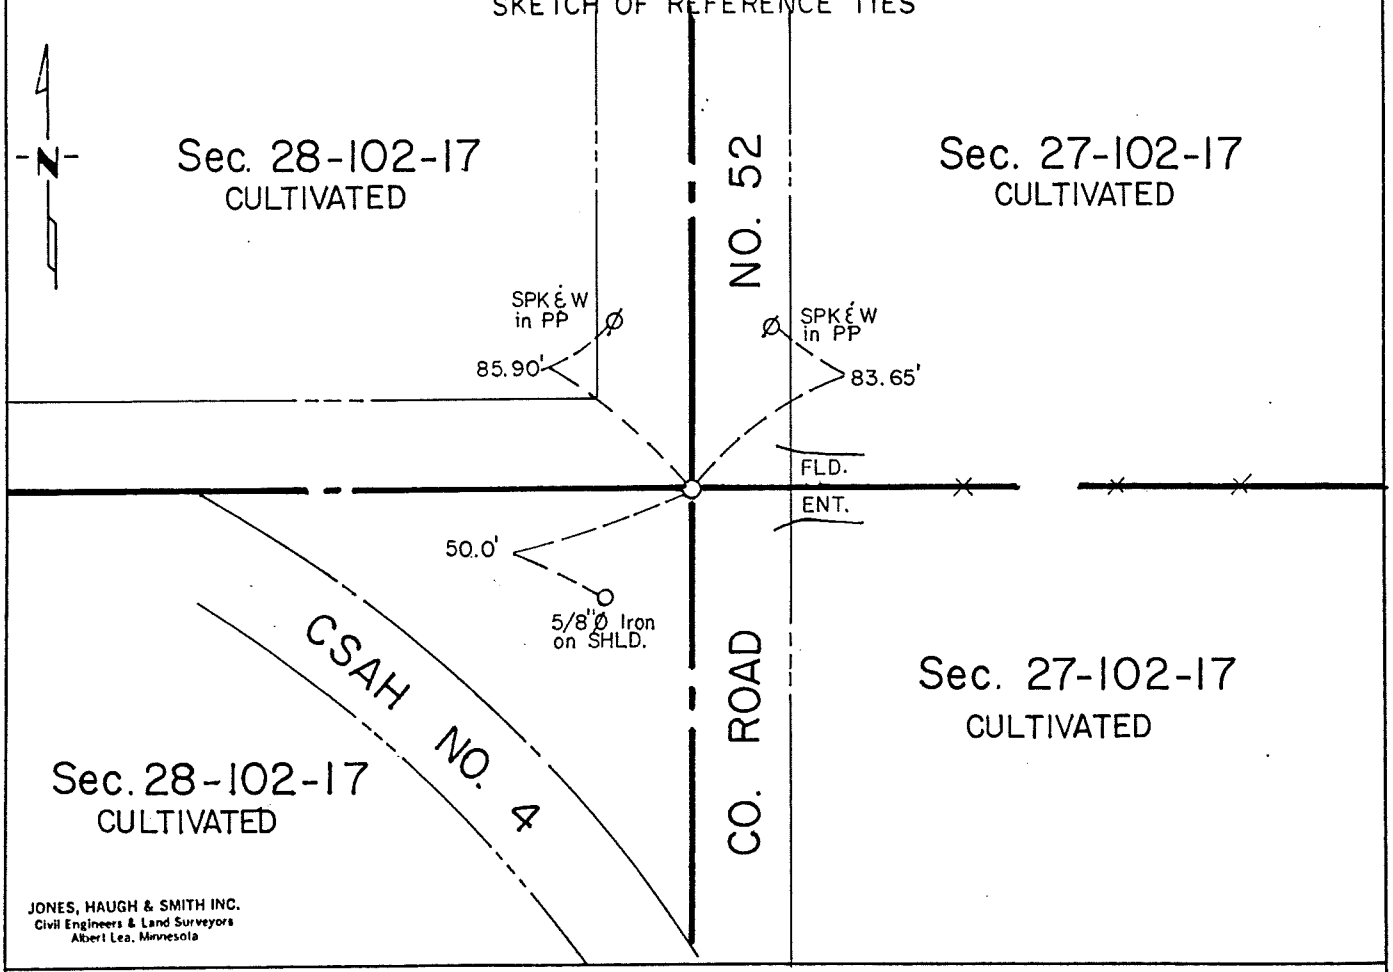

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-9-91

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Section 27-102-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1853. The government notes show a charred stake was set with a mound of earth and trench.

The following were contacted for section corner information:
- Mower County Highway Department
- Mower County Recorder
- Zenk Engineering
- Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1930 County Grading Plan SAH #20 shows a monument inplace and ties taken and recorded in Book "A" in the office of the County Engineer.

1951 Revised notes in Book "A", a concrete monument was uncovered and new ties were taken.

1991 Jones, Haugh & Smith crew, under the direction of John H. Schulte, dug with the County backhoe on the centerline of County Roads and uncovered a harrison cast iron monument 2' below road surface. Continued digging and uncovered a 6" diameter clay tile with 1/2 diameter iron cast in concrete in the center of the tile. Left monument as found and placed cast iron monument over it on the road surface.

The monument agrees with past records and fits occupationand road centerlines within the section and is accepted asbest evidence of a perpetuation of the original publicland survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 27, Township 102N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-9-91 (DATE) found a large pointed field stone 4' deep in virgin soil on ℄ of E-W road

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-9-91 (DATE) placed a 5/8"Ø iron on West side of stone found and a cast iron monument over at road surface.

SKETCH OF REFERENCE TIES

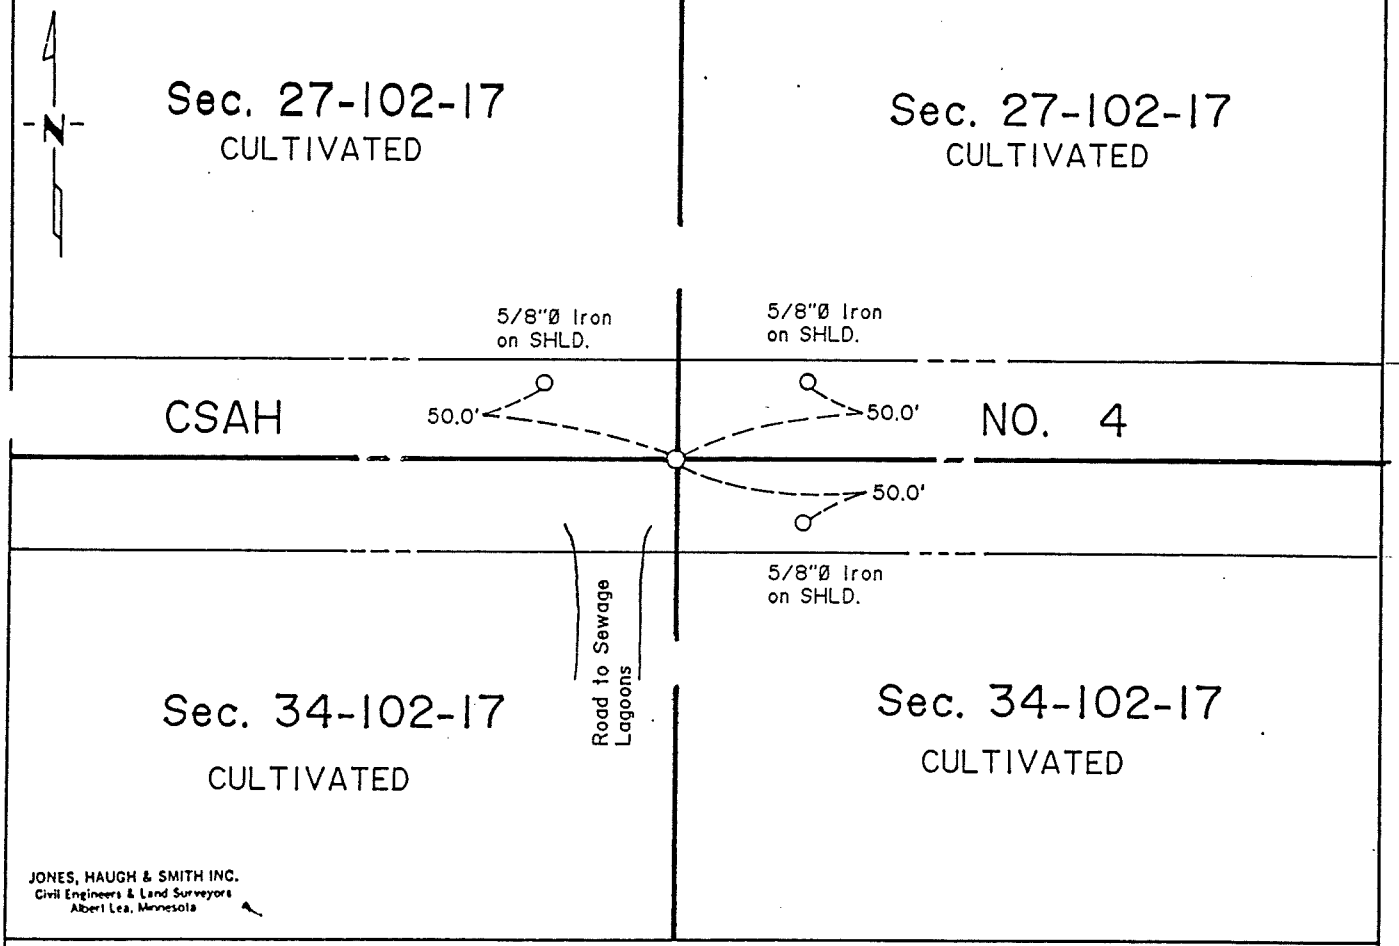

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ 5-16-91
SIGNATURE DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

S 1/4 corner Sec 27-102-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post and charred stake were set with a mound of earth and trench.

The following were contacted for section information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner:

1890 Clausen, Mower County Surveyor 1880-1892, field notes show a government post inplace.

1991 Jones, Haugh & Smith Inc crew, under the direction of John H. Schulte IV, dug with the County backhoe on centerline of east-west road for bituminous overlay project SAP 50-604-18. Dug a 4'x20'x4' deep hole and four feet more or less, east of midpoint. Uncovered a large pointed field stone in virgin soil. Continued digging and found no further evidence of public land survey corner. Placed a 5/8" diameter x 18" long iron on the west side of the stone and set a cast iron monument over stone on road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 27, Township 102N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-9-91 (DATE) found a railroad spike flush with surface over a harrison monument 3' deep.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-9-91 (DATE) placed a cast iron monument on road surface at same location of monument found.

SKETCH OF REFERENCE TIES

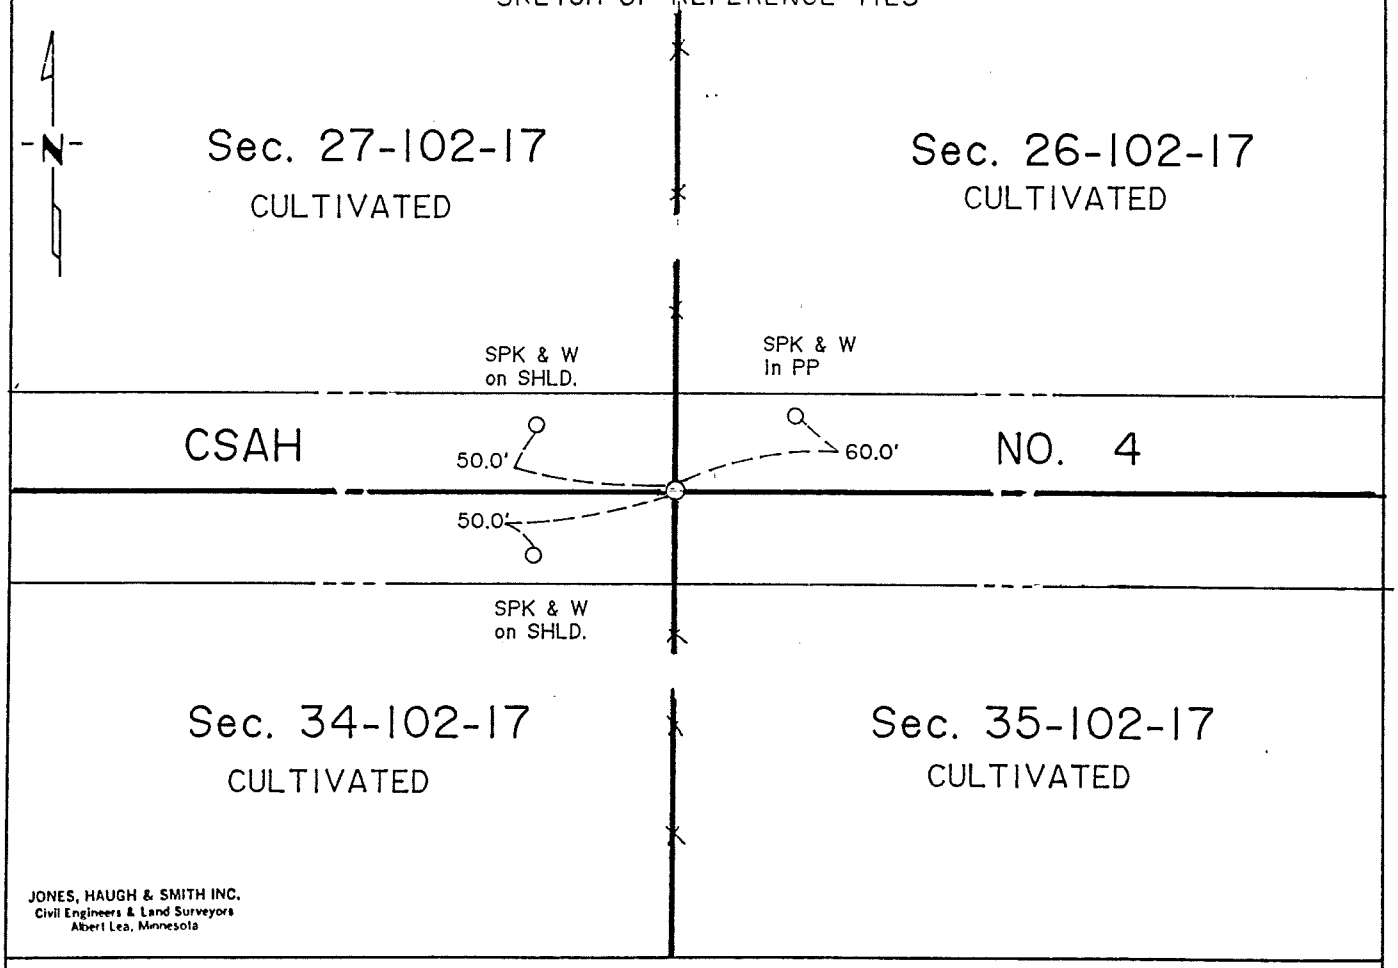

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ SIGNATURE 5-16-91 DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SE corner Section 27-102-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post and a charred stake were set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1890 Clausen, County Surveyor 1880-1892, field notes show a Government post inplace.

1892 Clausen field notes show a stone inplace.

1976 Jones, Haugh & Smith Inc crew placed a P.K. nail on centerline of E-W road in line with N-S fence.

1977 Jones, Haugh & Smith Inc crew uncovered a railroad spike during a survey E 1/2 SW 1/4 in Section 26-102-17.

1984 Jones, Haugh & Smith Inc crew during a survey in SE 1/4 SW 1/4 Section 26-102-17 uncovered a railroad spike flush with surface on centerline of E-W road in line with N-S fences.

1991 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte, dug with the Mower County backhoe at location of railroad spike flush on centerline of E-W road in line with N-S fences for bituminous overlay SAP 50-604-18. Dug a 4' x 8' x 5' deep hole and found the lower portion of a harrison cast iron monument 3.0' below the surface. Continued digging and found no further evidence of public land survey corner. Placed a cast iron monument on road surface at the same location as the monument found.

The monument fits and agrees with past records and occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 28, Township 102N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-9-91 (DATE) found a monkey wrench setting vertical 4.5' below surface over a rotted post.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-9-91 (DATE) placed a cast iron monument on road surface at same location of of wrench found.

SKETCH OF REFERENCE TIES

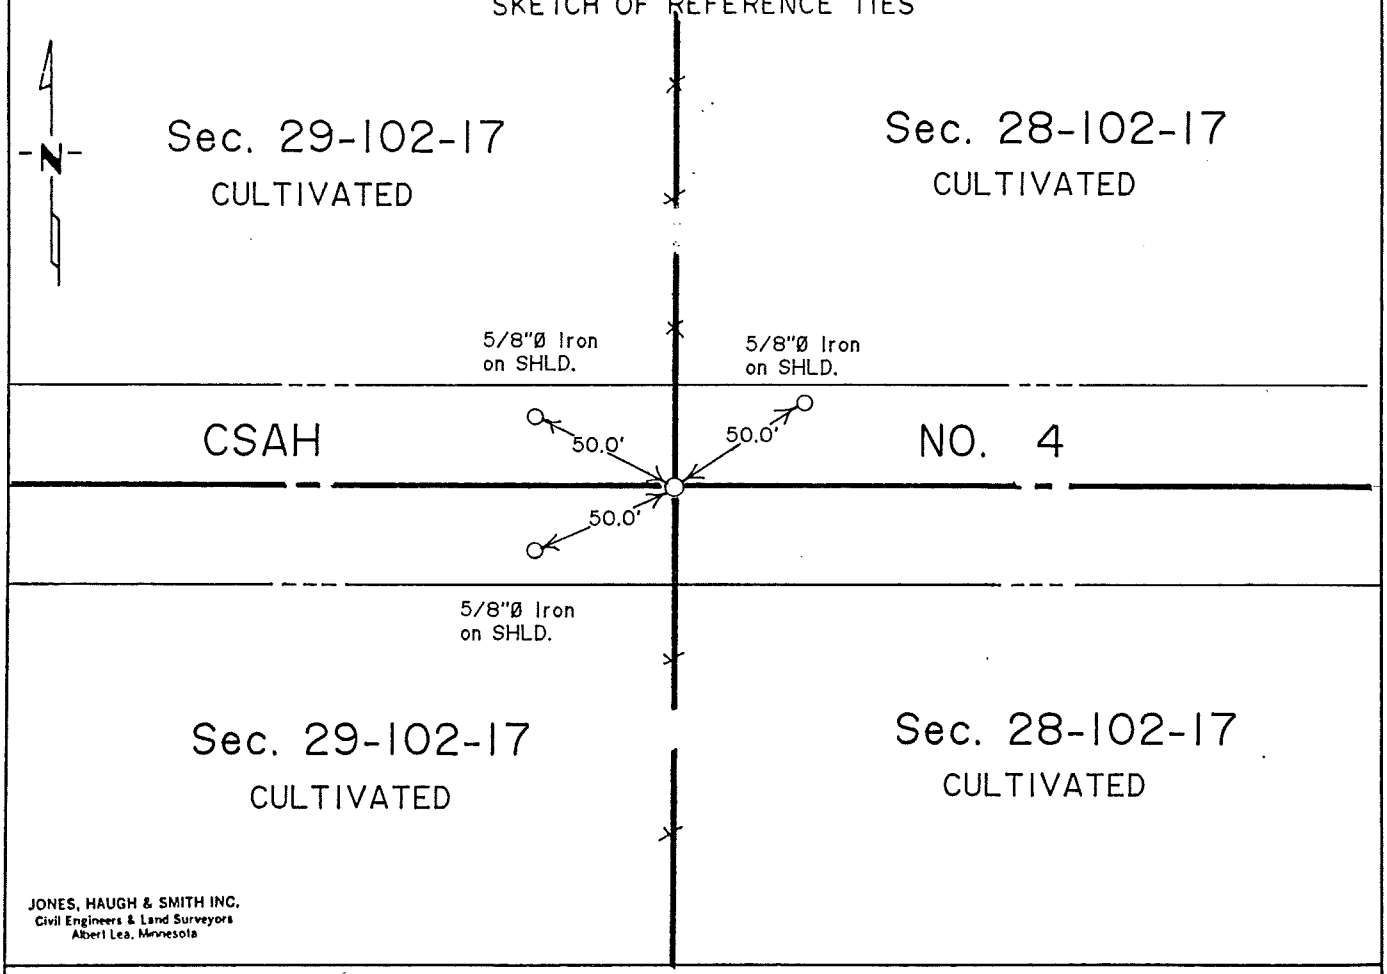

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ SIGNATURE 5-16-91 DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Section 28-102-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post and charred stake were set with a mound of earth and trench.

The following were contacted for section information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1930 Book "A" in the Mower County Engineering Office shows a corner at Sta. 161+39.6. The following ties were recorded:
50.1' SE to willow tree
34.8' SSE to willow tree
33.6' SW to rock
50.6' N to 4th F.P.

1991 Jones, Haugh & Smith Inc crew, under the direction of John H. Schulte, dug with the Mower County backhoe on centerline N-S-E-W road in line with N-S fences for bituminous overlay project #SAP 50-604-18. Excavated a 8' x 8' x 7' deep hole and uncovered a large sand deposit 3 feet wide and 6" long on road centerline. Appears corner may have been dug before. Continued digging and uncovered an old monkey wrench setting vertical 4.5' below surface over a rotted post bent over. Placed a cast iron monument on road surface at the same location of the wrench found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 30, Township 102N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-9-91 (DATE) found a 5/8"Ø×12" iron over a harrison cast iron monument over a 2"sq.X14" wood stake.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-9-91 (DATE) placed a cast iron monument at location of monument found.

SKETCH OF REFERENCE TIES

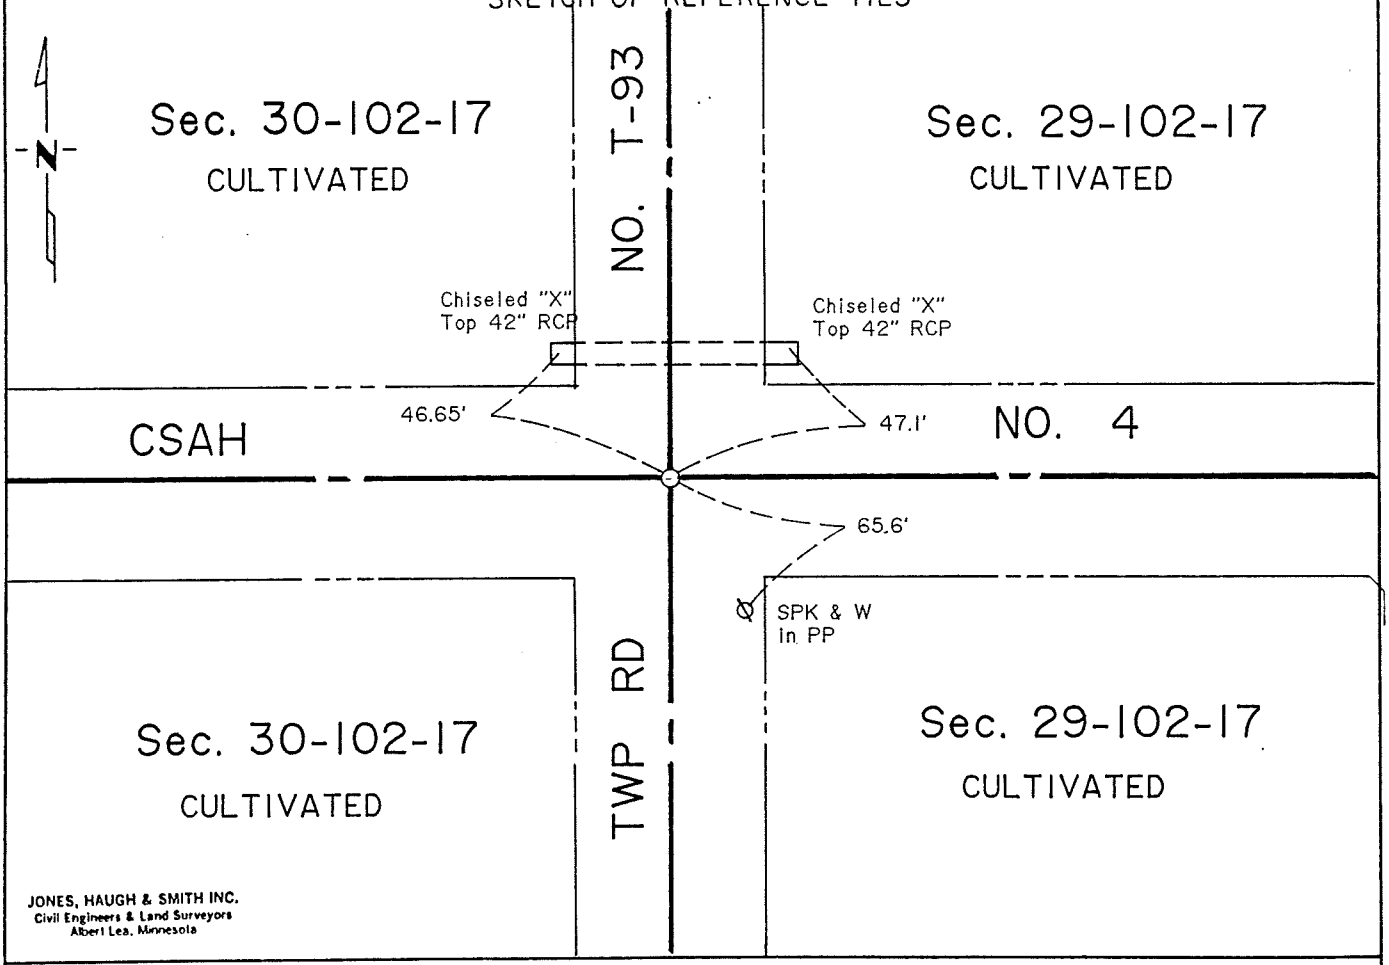

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-16-91

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

E 1/4 corner Section 30-102-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench. The following ties were taken:
10" Burr Oak N 20° W 60 links (399.3 ft)

The following were contacted for section information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner:

1888 Clausen Mower County Surveyor from 1880-1892 field notes show a post inplace and chaining notes are given.

Book "A" in the Mower County Engineering Office shows corners inplace as Station 108+47.0. The following ties were taken:
51.0' NE to 3rd fence post
48.2' NW to CFP
45.7 SW to NE corner concrete post
54.5' SW to telephone pole

1982 Jones, Haugh & Smith Inc crew uncovered a concrete monument at Sta. 108+47.0 on centerline roads. Ties were checked and all are still intact.

1985 Jones, Haugh & Smith Inc crew located monument for survey in NE 1/4 N 1/2 NE 1/4 Section 30-102-17.

1991 Jones, Haugh & Smith Inc crew, under the direction of John H. Schulte, dug with the County backhoe on centerline centerline of N-S-E-W roads for bituminous overlay project SAP 50-604-18. Dug a 5' x 14' x 6' deep hole and uncovered a 5/8" diameter iron 0.5' deep over a harrison cast iron monument 2 feet below road surface over a 2" square x 14" long wood stake. Continued digging and found no further evidence of the concrete monument noted in Book "A" or any other perpetuation of the original PLS corner. Placed a cast iron monument at the same location of the monument found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 30, Township 102N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-9-91 (DATE) found a 3/4"Øx30" long rebar with a 2"sq. wood post on West side of iron in a nest of 5 small stones 3' deep in old road grade.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-9-91 (DATE) placed a cast iron monument on road surface at location of iron found.

SKETCH OF REFERENCE TIES

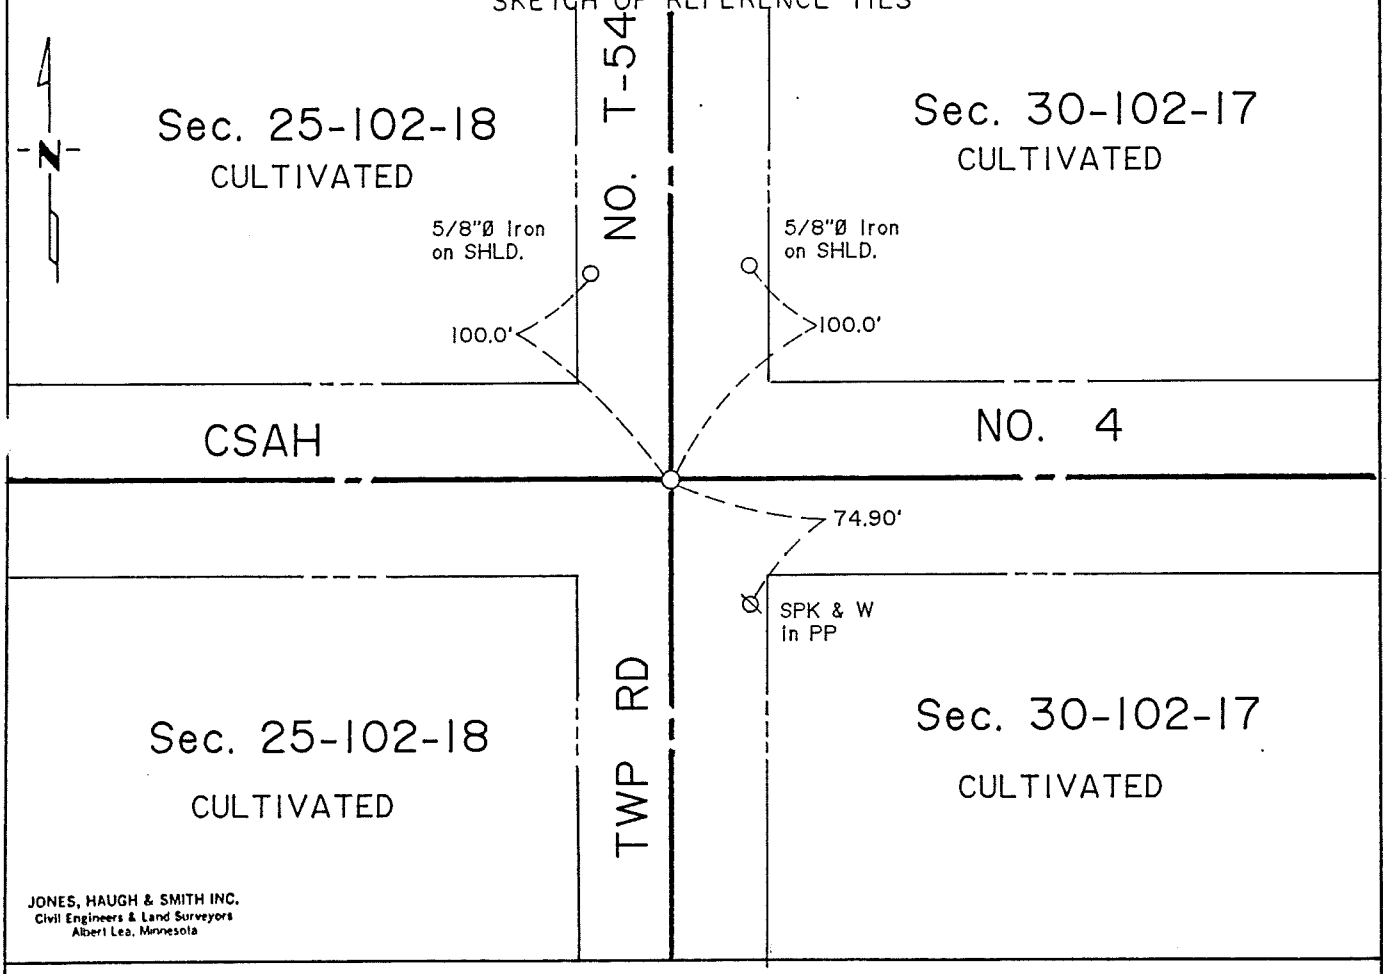

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-16-91

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Section 30-102-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench. The following ties were taken:

12" Burr Oak S 1° E 46 links (30.36 ft)
10" Burr Oak N 75° W 14 links (9.24 ft)

The following were contacted for section information:

Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner:

1888 Clausen, Mower County Surveyor from 1880-1892, field notes show government post inplace and chaining notes are given.

1930 Book "A" in the Mower County Engineering Office shows a stone inplace at Sta. 53+10.5. The following ties were taken:

55.6' SW to blaze in 3rd fence post
31.3' SE to "X" in West end concrete headwall
57.0' NE to brace pole
59.1' NW to highline pole

1972 Jones, Haugh & Smith Inc crew placed a 5/8" diameter iron on centerline centerline of N-S-E-W roads and the following ties were taken:

Concrete nail & W FCP NE 63.85'
Concrete nail & W PP NW 63.9'
Concrete nail & W PP SE 47.0'
Concrete nail & W PP SW 45.05'

1973 Book "A" shows inplace a 5/8" diameter rod 0.2' deep on centerline centerline of N-S-E-W roads. Ties were checked and remain intact.

1991 Jones, Haugh & Smith Inc crew, under the direction of John H. Schulte, dug with the County backhoe on centerline centerline of N-S-E-W roads for bituminous overlay project SAP 50-604-18. Dug a 5' x 12' x 6' deep hole and uncovered a 3/4" diameter x 30" long rebar with a 2" square wood post on the West side of iron in a nest of 5 small stones 3' deep in old road grade. Continued digging and found no further evidence of PLS corner or a perpetuation thereof. Placed a cast iron monument on road surface at the same location of the iron found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 30, Township 102N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER

At the corner location shown on the sketch:


☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 4-30-92 (DATE) placed a conc. nail ℄ w in bridge deck

REVISED FROM CERTIFICATE DATED 12-12-88

SKETCH OF REFERENCE TIES

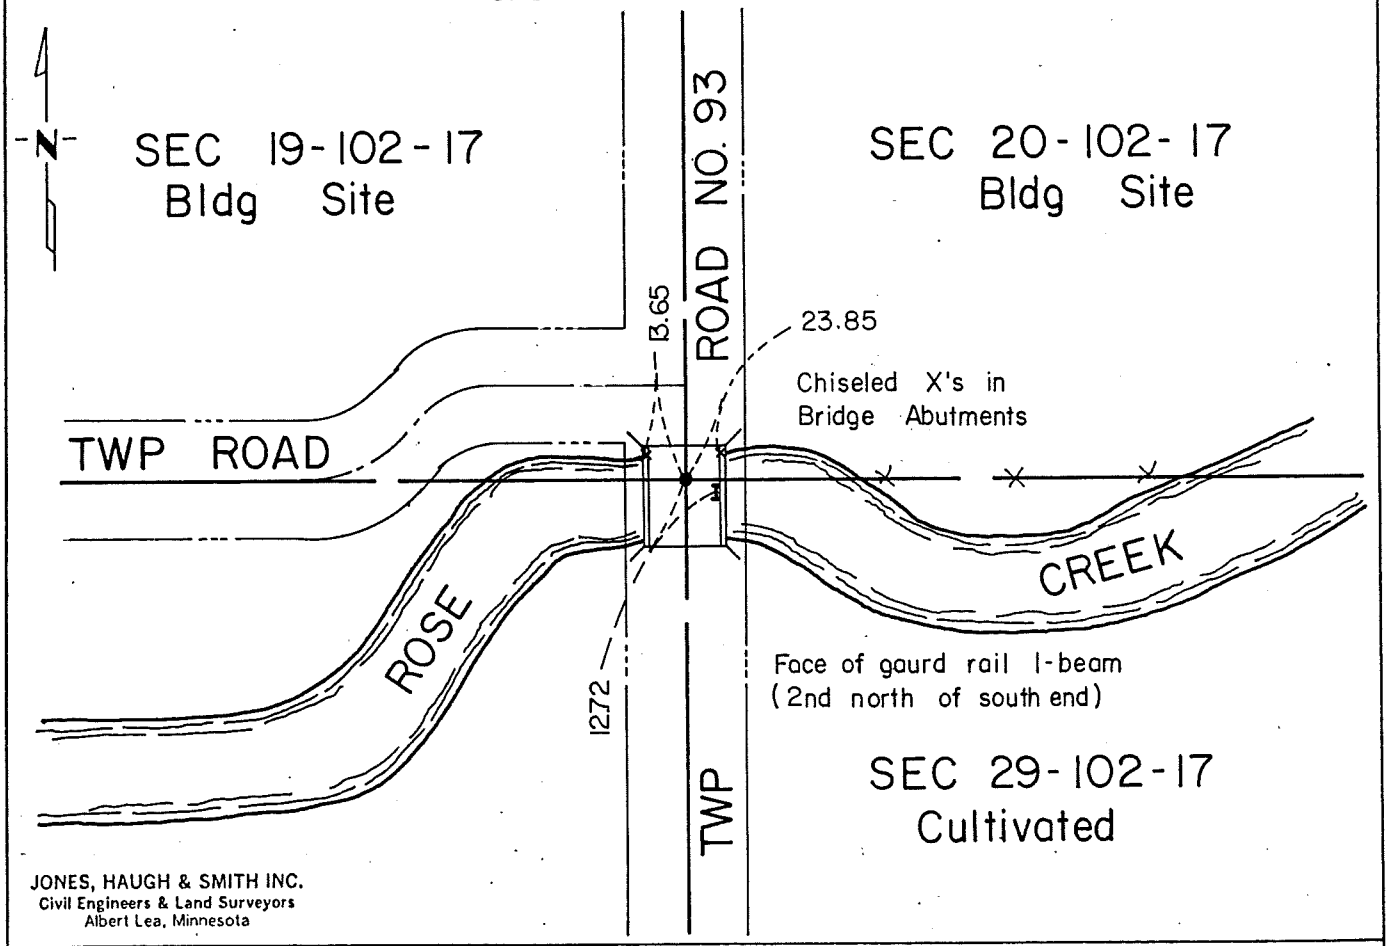

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ (SIGNATURE) 5-20-92 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NE corner Section 30-102-17

This corner was originally established by Deputy Surveyor Wm I. Anderson of the U.S. General Land Office in 1854. The government notes show this corner was marked with a wood post and the following bearing trees were marked:

Burr Oak	N 15 1/2° W	238 links
Burr Oak	N 55° E	174 links

The following were contacted for section corner information:
Mower County Highway Dept

1985 Jones, Haugh & Smith Inc crew found no evidence of public land survey corner or a perpetuation thereof. Appears corner was destroyed by rechanneling of creek and bridge construction. Therefore established position of corner using obliterated methods.

For electronic survey data and analysis, contact firm of Jones, Haugh & Smith Inc.