Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 17, Township 102N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 08/24/1993 (DATE) found a 5/8" IRON

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 08/24/1993 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

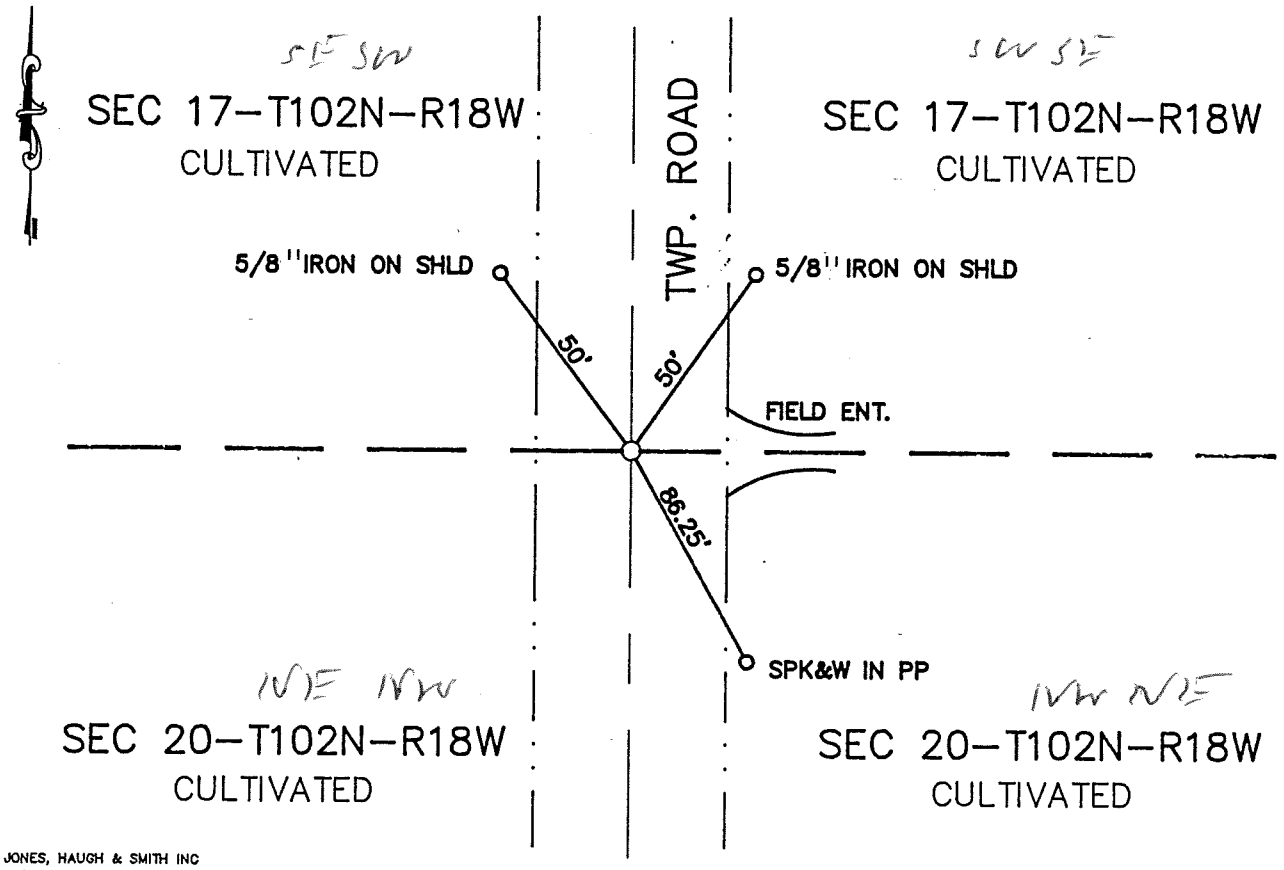

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 12-31-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4 P.M. on the 3 day of Jan A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 450253

M.H.D. FORM NO. 2105 BOOK 93 PAGE 488 Book 93 Misc Page 488

S 1/4 Cor SEC 17-102-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1993 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of township road N-S and in line with field division east. Uncovered a 5/8" iron 0.5' deep. Continued digging and found no other evidence of original PLS corner. Placed a cast iron monument inplace of iron found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 18, Township 102N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 8-24-93 (DATE) found a 5/8 IRON OVER A 3" X 5" WOOD POST OVER A LARGE POINTED STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 8-24-93 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

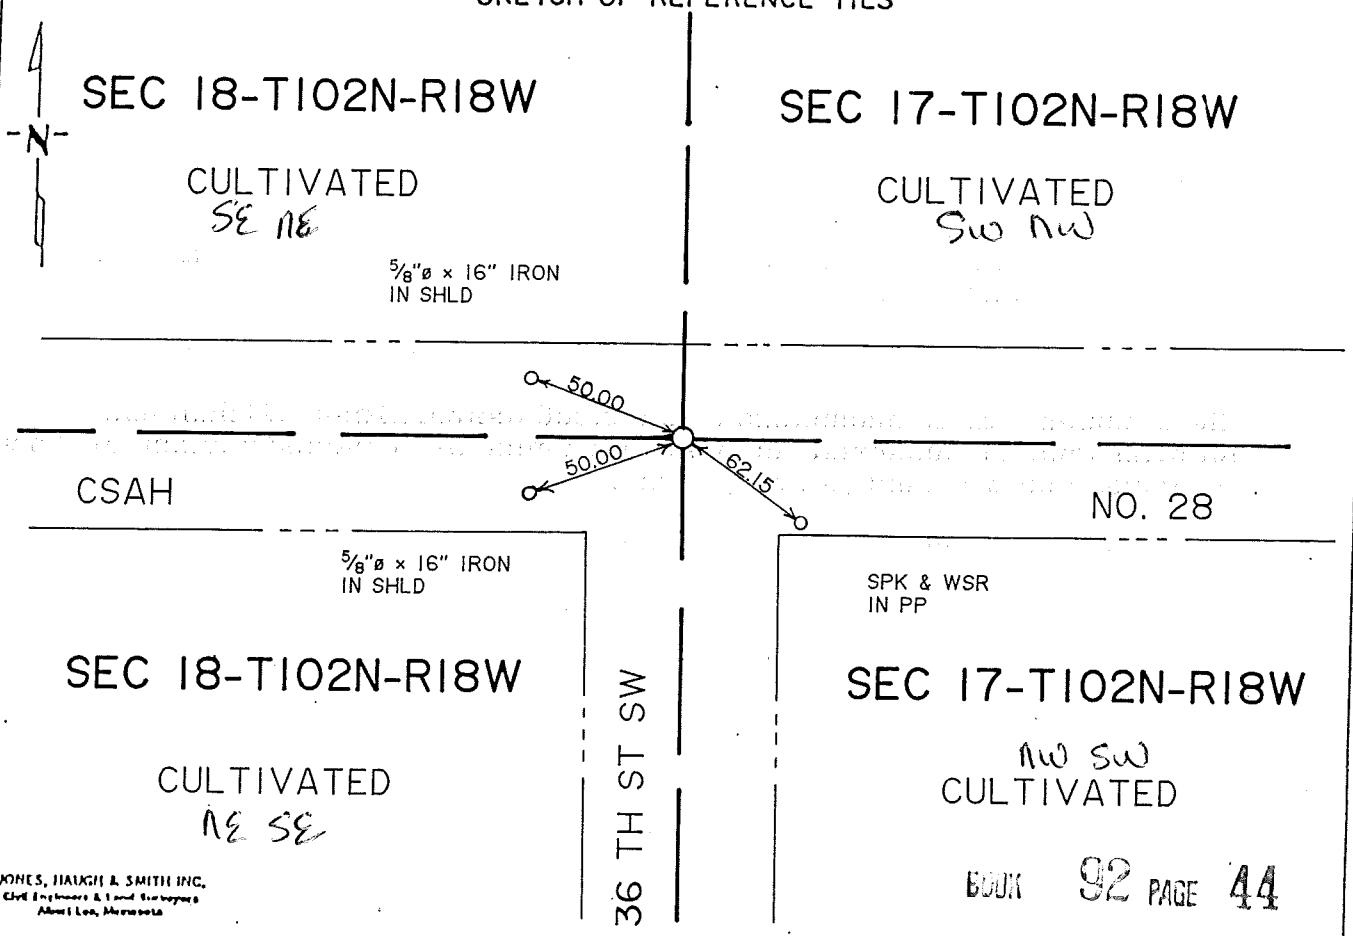

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 92 PAGE 44

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-25-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

446684

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 9 a .M. on the 29th day of July A.D., 19 96

COUNTY RECORDER Charles Ensign

By Sheryl A Dayton, Deputy

DOCUMENT NO. 446684

M.H.D. FORM NO. 2103

Book 92, Page 44 Misc

E 1/4 Cor SEC 18-102-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1993 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at CL E-W-S roads and uncovered a 5/8" iron 0.3' deep. Continued digging and uncovered a 3"x5' wood post on the west side of a large pointed stone. Stone was directly below 5/8" iron above. Set a 5/8" iron on the west side of the stone and set a cast iron monument at the road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 18, Township 102 N, Range 18 W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 2-2-86 (DATE) found a NO EVIDENCE OF PLS CORNER.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 2-26-86 (DATE) placed a 5/8"ø iron on road surface.

SKETCH OF REFERENCE TIES

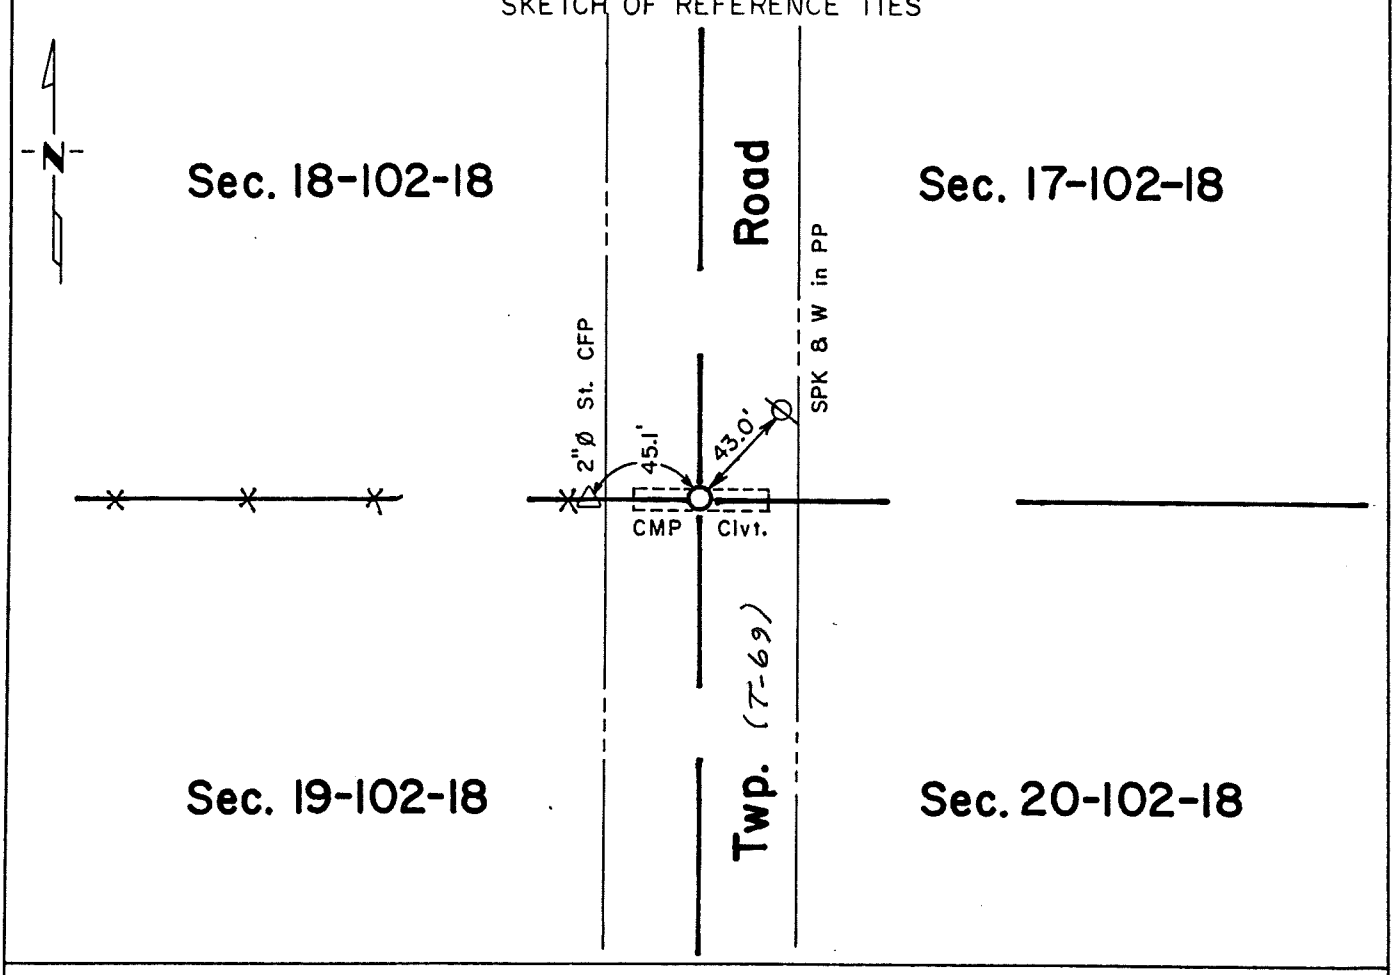

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 9-10-91 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SE corner Sec 18-102-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Survey Office in 1854. The government notes show this corner was marked with a post and a mound of earth with a trench.

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorder's Office

County Highway Department records indicate no record of this corner.

1986 Jones, Haugh & Smith crew found a large CMP culvert had been laid across north-south township road in line with fence west which would have destroyed original public land survey corner. Therefore the road grade was split and a 5/8" diameter iron was placed in line with fence west.

Corner placed fits existing occupation and road centerline and is accepted as best evidence of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

"A"

Form 349 CHAPTER 359 LAWS ON 1921

(Austin Twp.)

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Corner to Sec. 23, 24, 25, 26 T. 102 N. R. 18 W.

TIC BOOK P. 86

State of Minnesota }
County of Mower } ss.

I hereby certify that on the 25th day of May 19 29

I found the Section Corner referred to above

which was evidenced by Iron bolt


and I further certify that to perpetuate the location of such corner I did at the exact location thereof place a permanent marker consisting of Concrete monument 6 x 6 x 24 inches with steel rod in center.

I further certify that I established two

reference or witness monuments consisting of crosses chiseled in concrete bridge abutment

which reference or witness monuments are located in the manner following:

Diagram of reference points shown below.

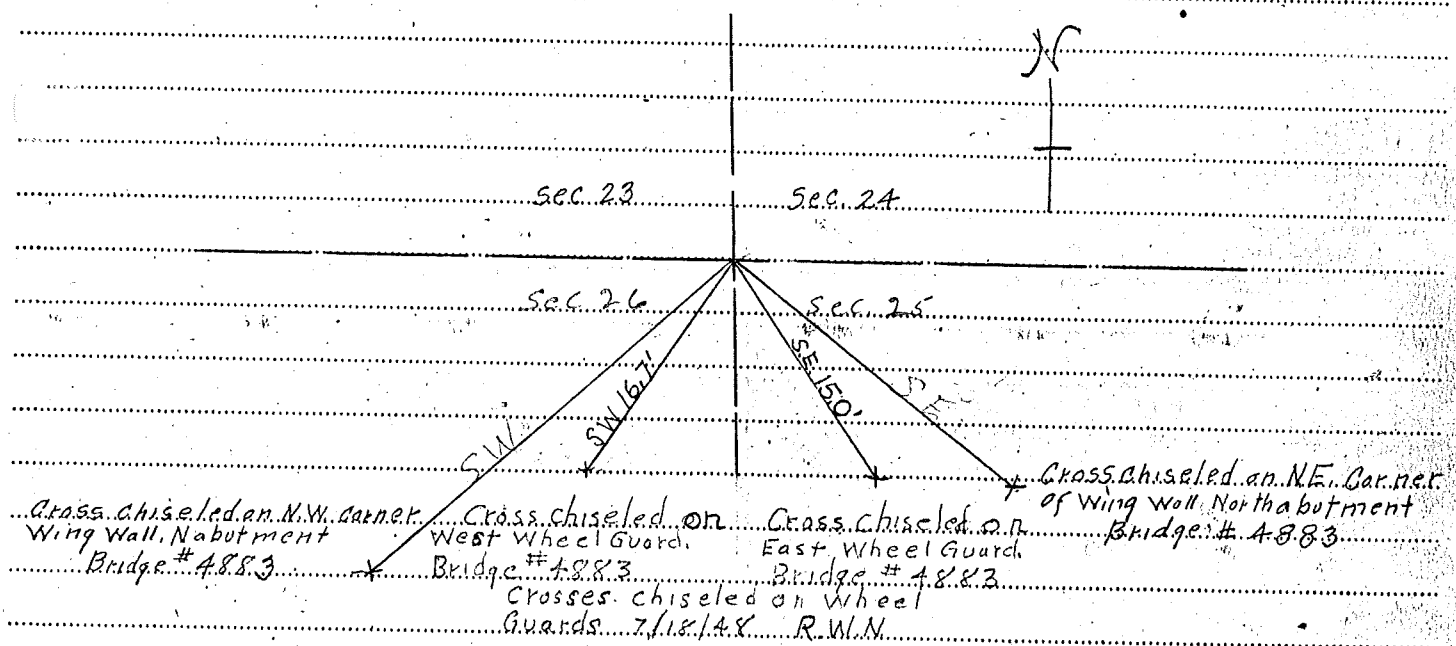

Dated at Austin Minn., this 29th day of December 19 29

Resident Engineer

OFFICE OF REGISTER OF DEEDS }
County of ..... } ss.

I hereby certify that the within instrument was filed in this office for record on the

day of ..... A. D. 19 ..... at ..... o'clock ..... M.

Register of Deeds

By ..... Deputy

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 19, Township 102N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 09/27/1995 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 09/27/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

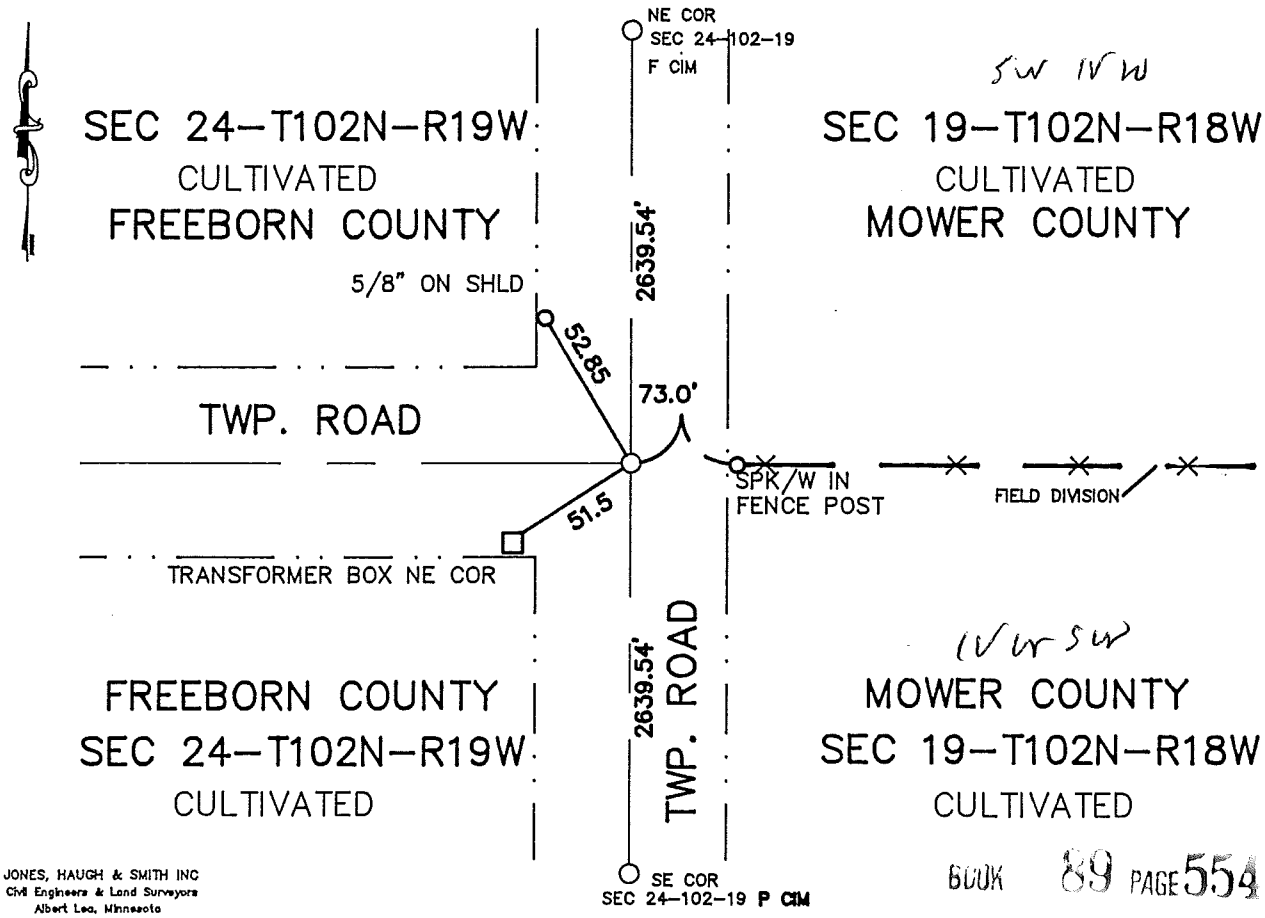

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 89 PAGE 554

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 12-27-95

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P.M. on the 2 day of Jan A.D., 1996

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 441689

M.H.D. FORM NO. 2105

Book 89 Misc Page 554

W¼ cor Sec 19-102-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Freeborn County Highway Dept.
Freeborn County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones, Haugh and Smith crew, under direction of John Schulte, Freeborn County Surveyor RLS 13807, dug with county backhoe at the CL of township road N-S and W, in line with field division East. No evidence was found of the original PLS corner. Placed a cast iron monument at the CL of township road N-S and township road West on a straight line between the NE and SE corners of section 24. This position is also the midpoint of the east line of section 24.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

B

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Corner to Sec. 25, 26, 35, 36 T. 102 N. R. 18 W.


Page 86

State of Minnesota } ss.
County of Mower }

I hereby certify that on 30th day of May 19 29
I found the Section Corner referred to above
which was evidenced by Iron stake
and I further certify that to perpetuate the location of such corner I did at the exact location thereof place a permanent marker consisting of Concrete monument 6 x 6 x 24 inches with steel rod in center.

I further certify that I established two
reference or witness monuments consisting of 12 inch oak and 24 inch willow trees
which reference or witness monuments are located in the manner following:

Diagram of reference points shown below.

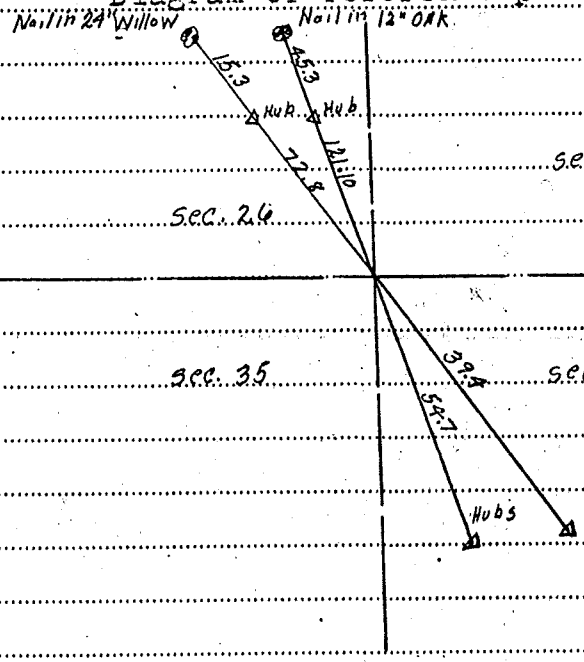

Dated at Austin Minn., this 29th day of December 19 29.

Resident Engineer

OFFICE OF REGISTER OF DEEDS } ss.
County of }

I hereby certify that the within instrument was filed in this office for record on the
A. D. 19 at o'clock M.

Register of Deeds

By Deputy

B

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 22, Township 102N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/18/1997 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/18/1997 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

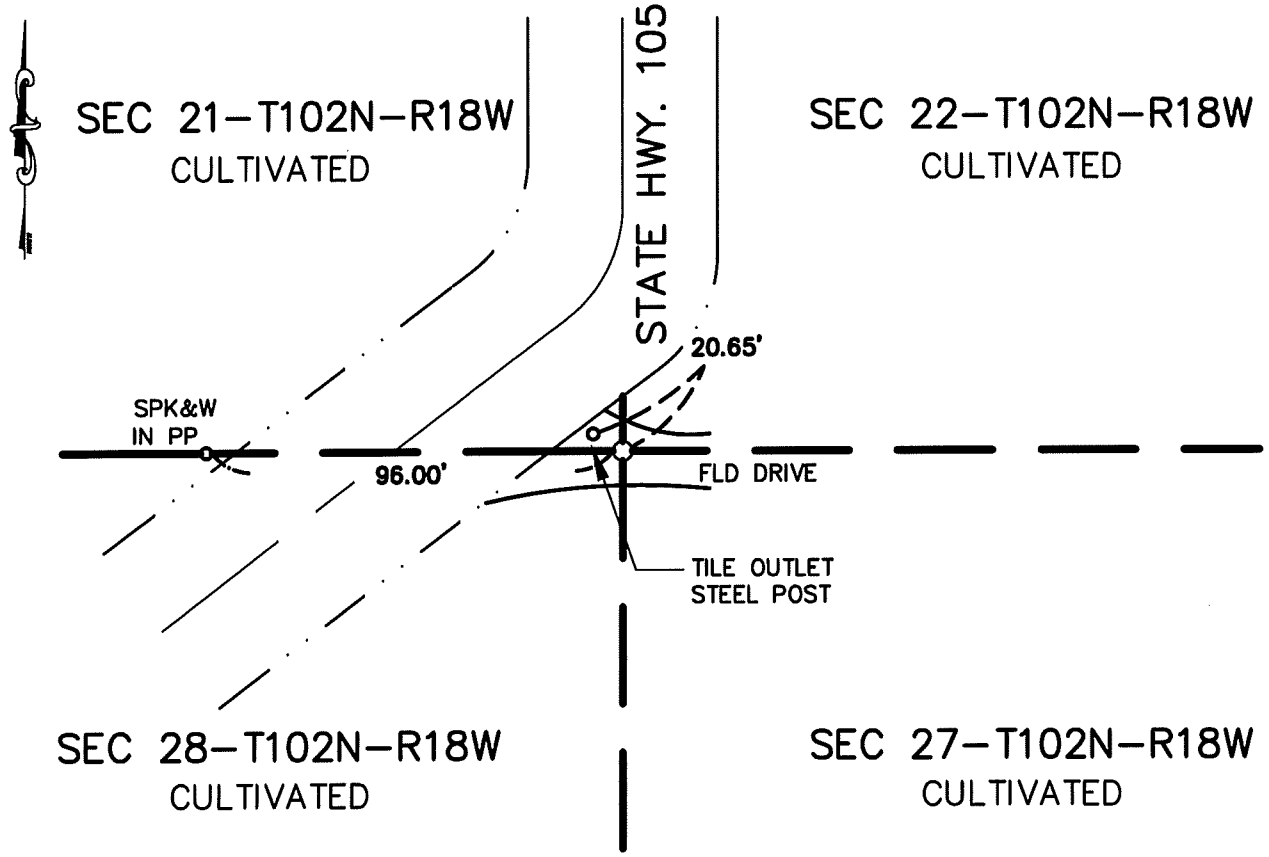

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 10-5-00

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

SW Cor SEC 22-102-18

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

Mower County records show an iron pipe at a distance of 5282.10' from the NW corner to the SW corner of section 22.

1975 Jones Haugh and Smith crew located 3/4" pipe in line with the centerline of CSAH No. 105 north and in line with line fence E-W.

1986 Jones Haugh and Smith crew located a 1" pipe at the centerline of CSAH No. 105 north and in line with line fence E-W in center of field division.

1997 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, located a 1" pipe at the centerline of field entrance and centerline of CSAH No. 105 north. Replaced with 5/8" iron with cast iron monument over.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.