Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 27, Township 102N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 12/16/1996 (DATE) found a 5/8" X 24" IRON OVER CONCRETE MONUMENT

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

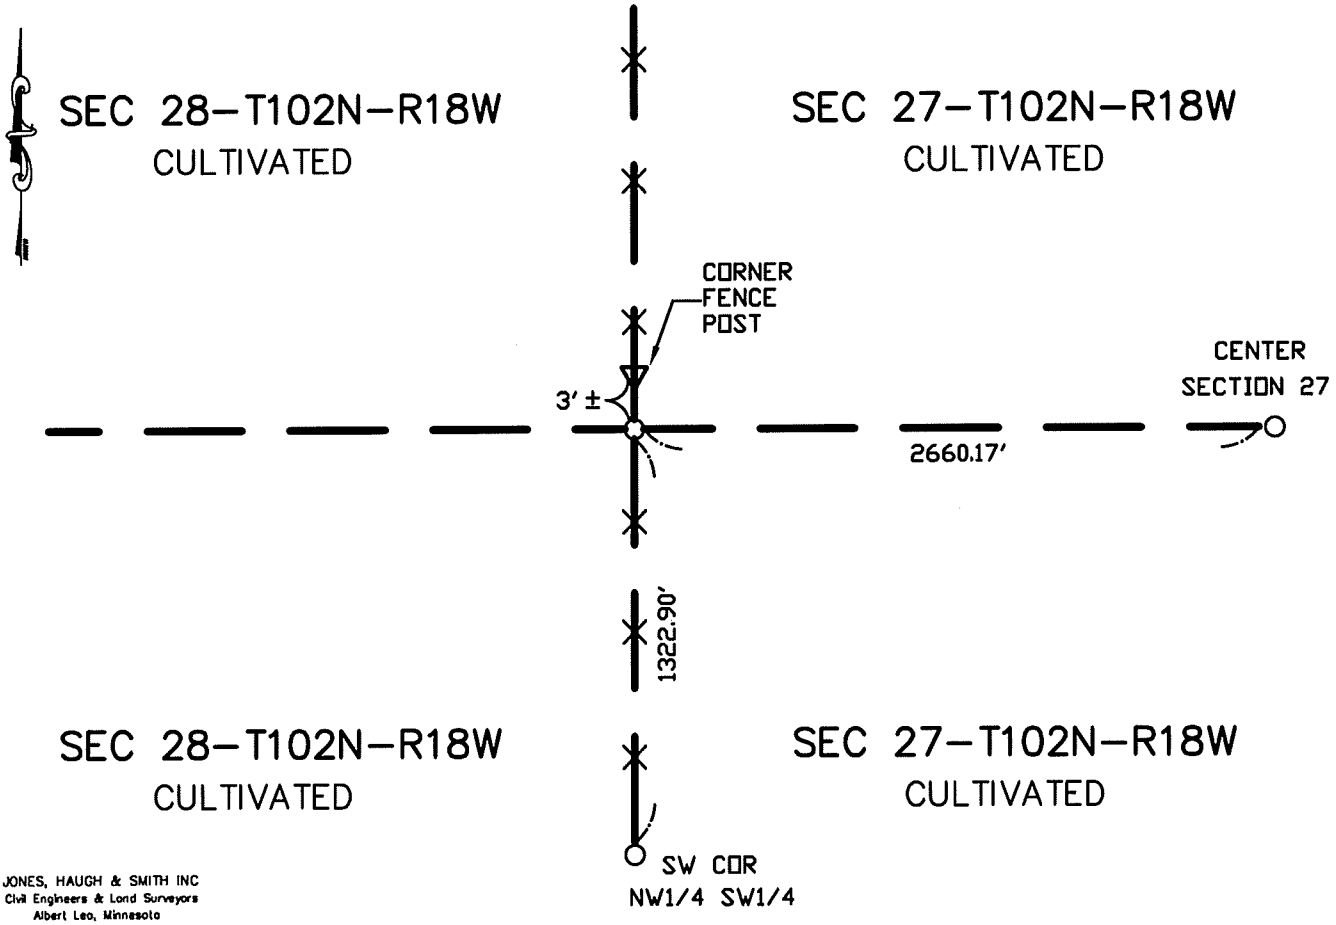

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 10-5-00

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

W 1/4 Cor Sec 27-102-18

Deputy Surveyor William I. Anderson of the U.S. General Land Office originally established this corner in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

Mower County records state that a concrete monument was in place, 3' south of corner fence post.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand at Mower County records location and uncovered a 5/8" x 24" iron. Continued to dig and uncovered a concrete monument with an iron pin. Replaced 5/8" iron over monument as found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 28, Township 102N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch 18

☐ On 12/16/1996 (DATE) found a 5/8" IRON

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

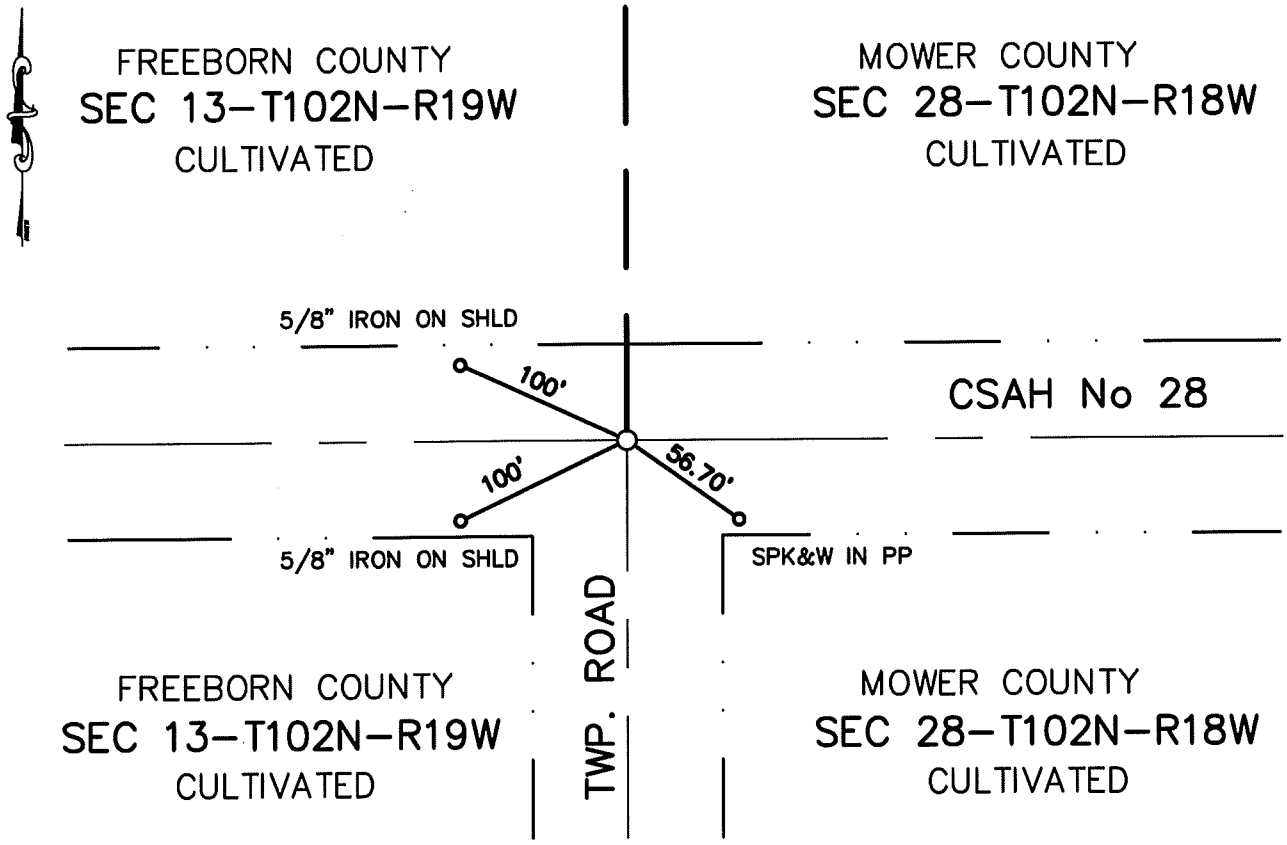

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ 10-5-00
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

W 1/4 Cor SEC 28-102-18

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1988 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with the county backhoe at the centerline of township road E-W and township road south. Uncovered a 5/8" iron. Continued digging to virgin soil and found no other evidence original PLS corner.

1997 Jones Haugh and Smith crew located 5/8" iron.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. P 49, "T"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 31, Township 102N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 12-1-92 (DATE) found a 2" x 4" CIM NEXT TO A DECAYED WOOD POST

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 12-1-92 (DATE) placed a 5/8"ø x16" IRON CAPPED RLS NO. 13807

SKETCH OF REFERENCE TIES

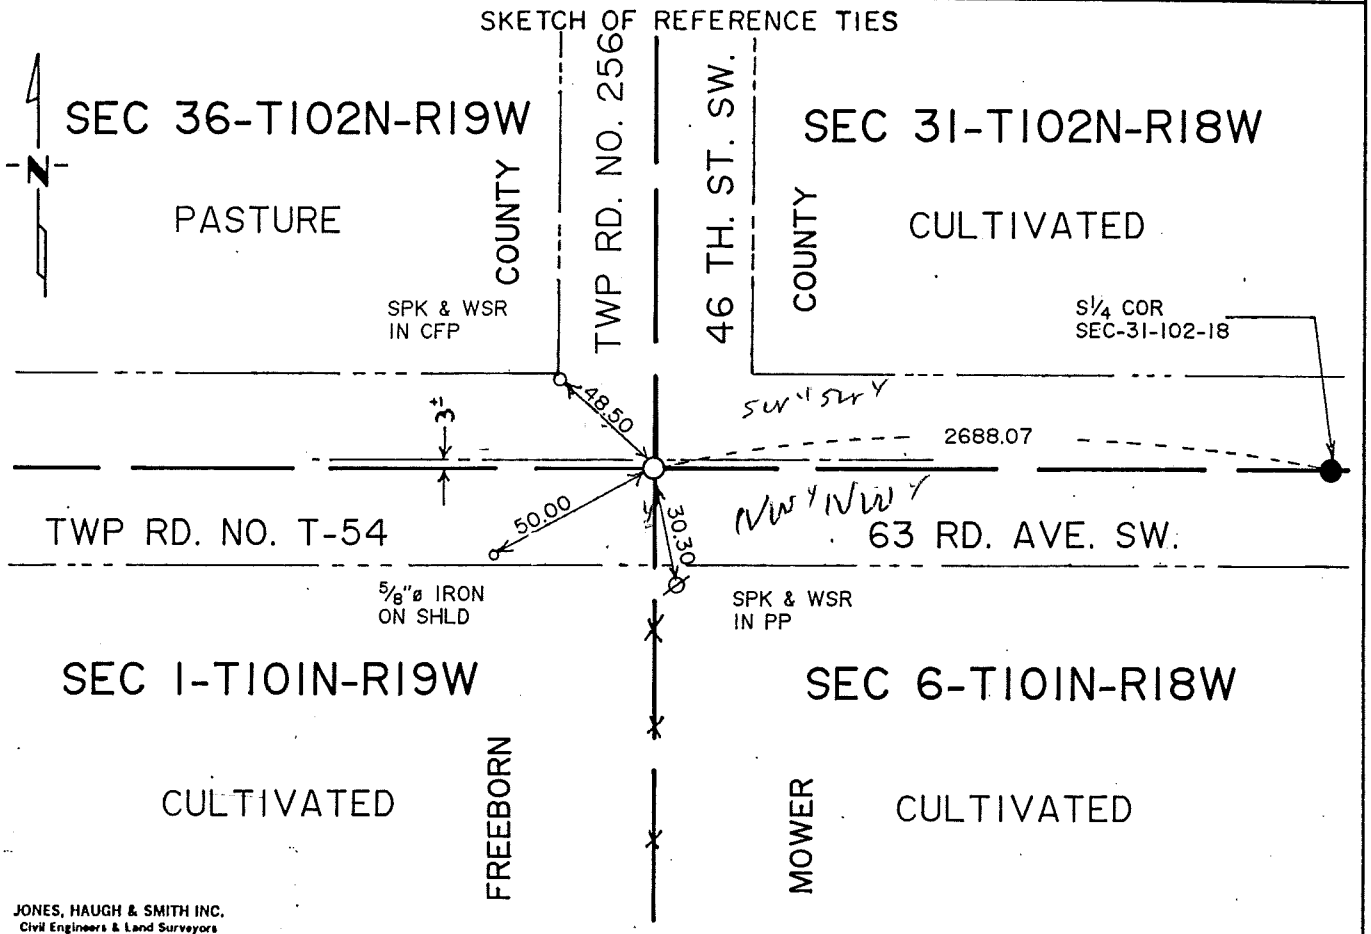

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 4-30-93

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P.M. on the 4 day of May A.D., 1993

COUNTY RECORDER Edwardo Enga

By Marlene Martin, Deputy

DOCUMENT NO. 420179

Bk 79 Mtg Pg. 324

BOOK 69 PAGE 324

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Sec. 31-102-18

This corner was originally established by Deputy Surveyor J.B. Reyman of the U.S. General Land Survey Office in 1853. The government notes show charcoal was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Engineering Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

Book R indicates that F.H. Fisk, Freeborn County Surveyor, found an iron stake and popular tree at the southeast corner Section 1-101-19.

1940 Book 1 indicates that John Nielsen, Freeborn County Surveyor, dug and found a cast monument in south wheel track of east-west road and in line with fence south. The following ties were taken:
Face of power pole 29.6' S
Face of corner post 44.2' NE

1992 Jones, Haugh & Smith crew under the direction of John H. Schulte IV, RLS #13807, Freeborn County Surveyor, dug with a jackhammer at the centerline centerline intersection of township roads and found a 2"x4" cast iron monument 3.5 feet deep and at the north side of decayed wood post. Therefore we accepted 2"x4" cast iron monument as the perpetuation of the original public land survey corner and set a 5/8" diameter x 16" iron, capped RLS 13807, near road surface and above monuments found.

The monument set fits occupation and road centerlines within the section and is accepted as best evidence of the original public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

BOOK 79 PAGE 325

Jones & Haugh

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 31, Township 102N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 10-15-91 (DATE) found a cast iron monument

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

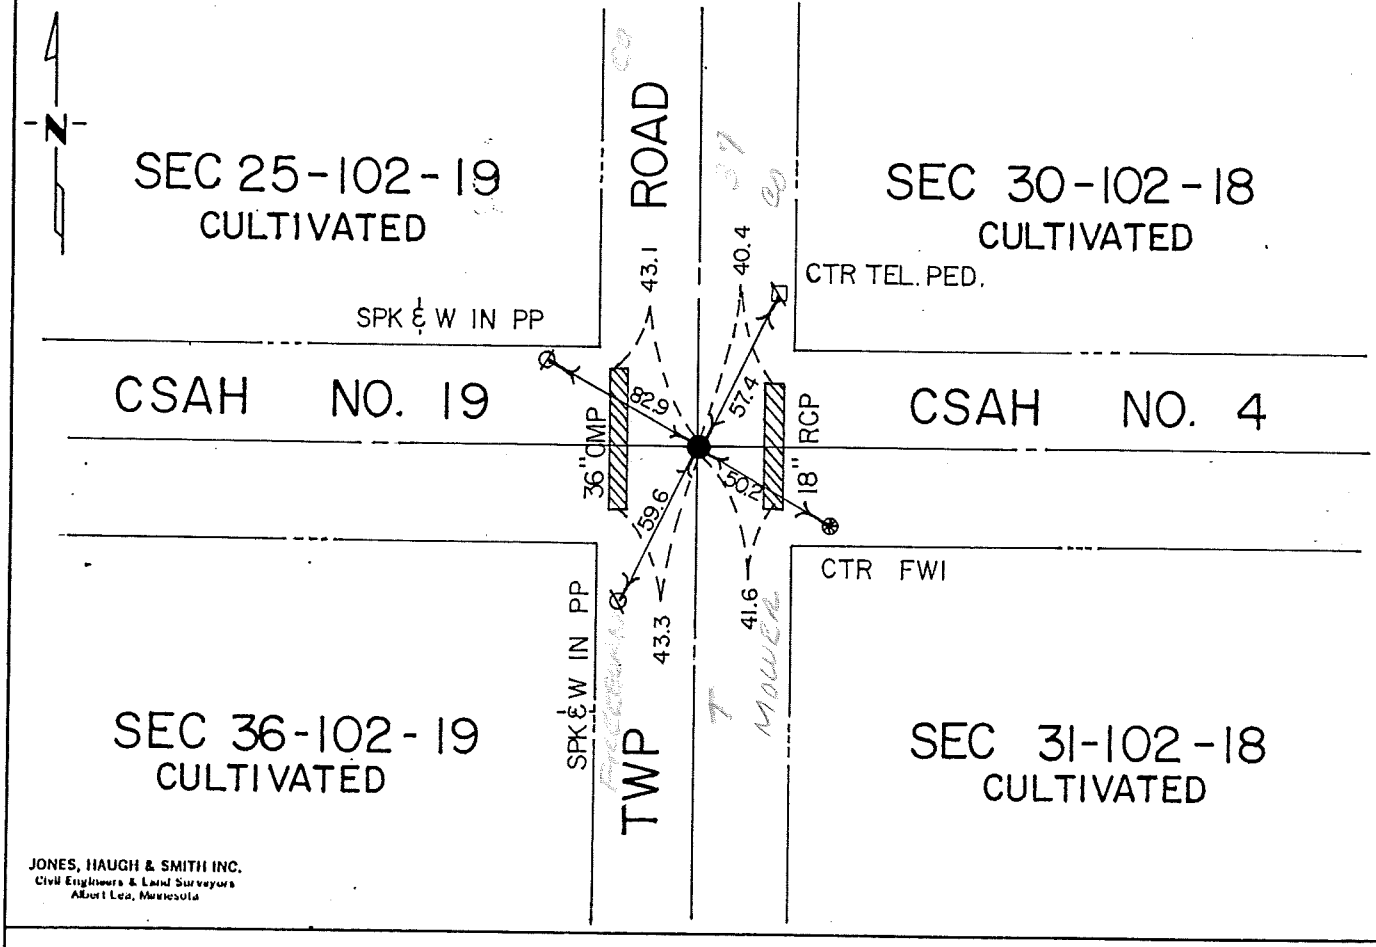

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-16-92

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Section 31-102-18

This corner was originally established by Deputy Surveyor J.B. Reyman of the U.S. General Land Office in 1854. The government notes show corner was marked with a wood post and charred stake and a trench with a mound of earth. Cherry and locust seeds were planted northeast and southwest of corner.

The following were contacted for section corner information:
Mower County Engg Dept Freeborn County Engg Dept

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1930 Mower County Grading Plans show a monument found at Sta 0+00 and the following ties were taken:
40.0' NW to mail box post
46.0' SW to east gate post
39.3' NE to telephone post
57.7' SW to west gate post

1938 John Nielsen, the Freeborn County Survey RLS 1427, dug in center of intersection of roads, and found an oak stake in center of clay tile.

1953 Recorded in Book 'A' in the office of the Mower County Engineer a concrete monument was found over a 1/2" diameter iron pipe and the following ties were taken:
45.4' NW to a 12" CFP
56.0' SW to power pole
50.0' SW to center tile inlet
39.1' SE to center tile inlet
106.4' ESE to telephone pole

1968 Larry Nelsen, Freeborn County employee, found a wood stake at this corner. Placed a pipe over wood stake found. Took three ties.

1988 Jones, Haugh & Smith crew under the direction of John Schulte, Freeborn County Surveyor RLS 13807, dug on the centerline of north-south-east-west road intersection, and uncovered 5/8" diameter iron two feet deep, and a 1/2" diameter iron and wood stakes cast in concrete inside a clay tile 3 1/2 feet deep.

Found no further evidence of the public land survey. Accepted wood stakes in clay tile found as best evidence of a perpetuation of the original public land survey corner and set cast iron monument on road surface over wood stakes found.

1991 Jones, Haugh & Smith Inc crew uncovered cast iron monument.

For electronic survey data contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 31, Township 102N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 10/15/1991 (DATE) found a NO EVIDENCE OF P.L.S. CORNER

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10/15/1991 (DATE) placed a cast iron monument

SKETCH OF REFERENCE TIES

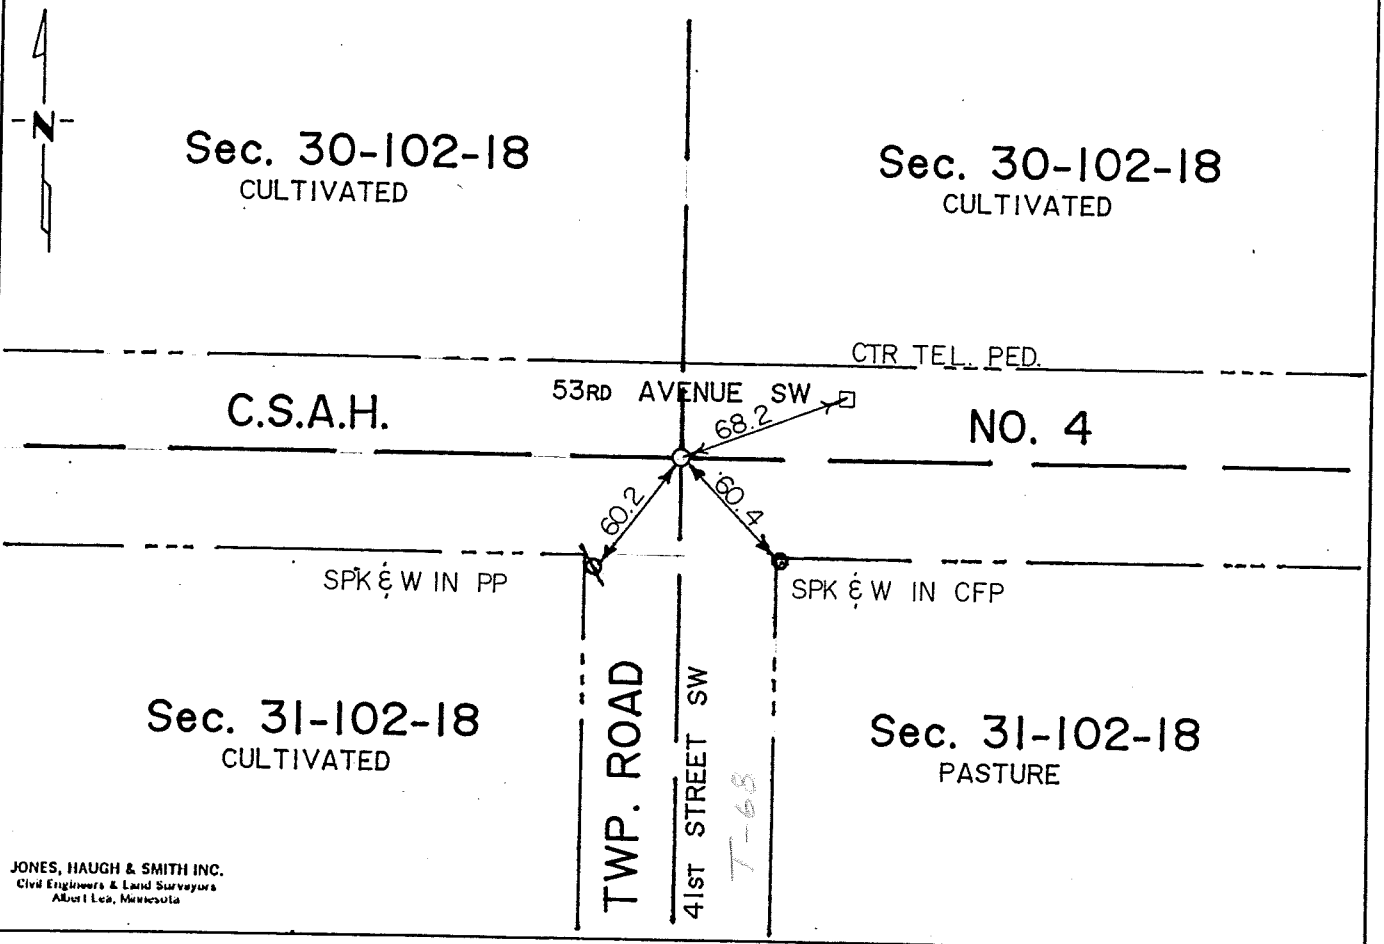

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-16-92

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Sec 31-102-18

This corner was originally established by Deputy Surveyor Wm. I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of a perpetuation of the original public land survey corner.

1991 Jones, Haugh & Smith Inc crew under the direction of John Schulte IV, dug with the County backhoe on centerline centerline and found no evidence of a perpetuation of the original public land survey corner. Accepted centerline centerline as best evidence and set cast iron monument on road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 31, Township 102N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 10/15/1991 (DATE) found a 6" CLAY TILE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 10/15/1991 (DATE) placed a 5/8"ø x 16" IN TILE WITH CAST IRON MONUMENT OVER 5/8"ø IRON

SKETCH OF REFERENCE TIES

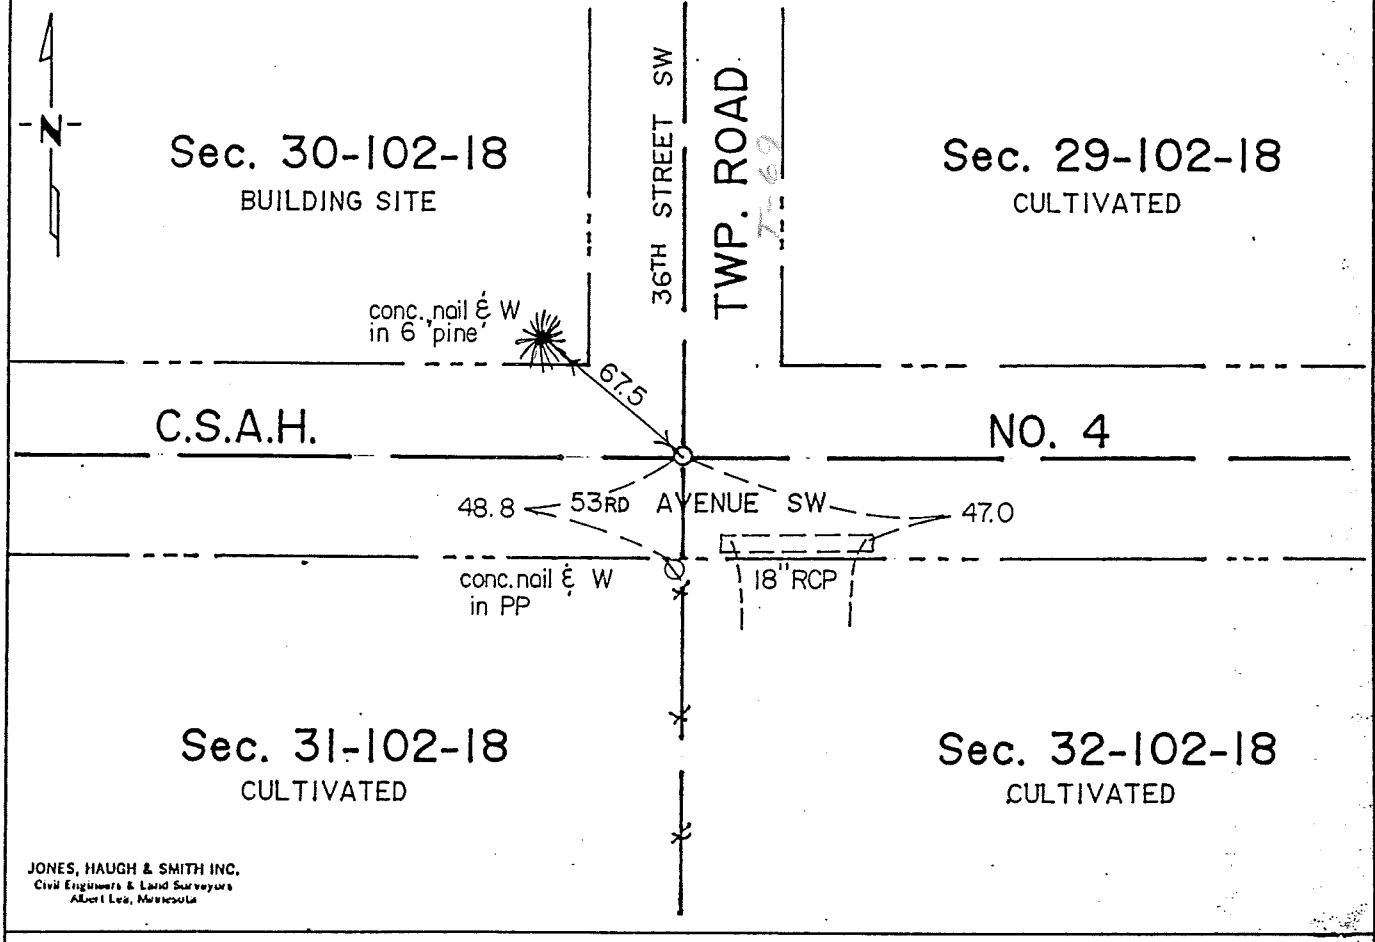

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-16-92

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NE corner Sec 31-102-18

This corner was originally established by Deputy Surveyor Wm. I Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1930 Mower County Grading Plans shows a monument inplace and the following ties were taken:
31.0' South the Maple Tree
32.5' NW to CFP
38.2' NE to CFP

1953 Recorded in Book "A" in the Office of the County Engineer a concrete monument is shown and the following ties were taken:
95.5' NNW to 18" blazed Spruce
58.4' NE to telephone pole
99.1' SSE to third steel fence post
50.7' SSW to power pole

1982 County Grading Plan shows a cast iron monument inplace over concrete monument.

1991 Jones, Haugh & Smith Inc crew under the direction of John Schulte IV, dug with the County backhoe on centerline centerline of north-east-west roads for bituminous overlay project and uncovered a 6" concrete monument cast in a clay tile 3 feet below road surface in virgin soil. Found no evidence of cast iron monument set by County in 1982 Grading Project. Accepted concrete monument which agrees with past records and set a cast iron monument over monument on road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. p 49, "U"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 31, Township 102N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 2-13-80 (DATE) found a 2" x 3" BAR THREE FEET DEEP PLACED A 5/8"ø IRON OVER MONUMENT FOUND

■ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 12-1-92 (DATE) placed a LEFT 5/8"ø IRON AS FOUND

SKETCH OF REFERENCE TIES

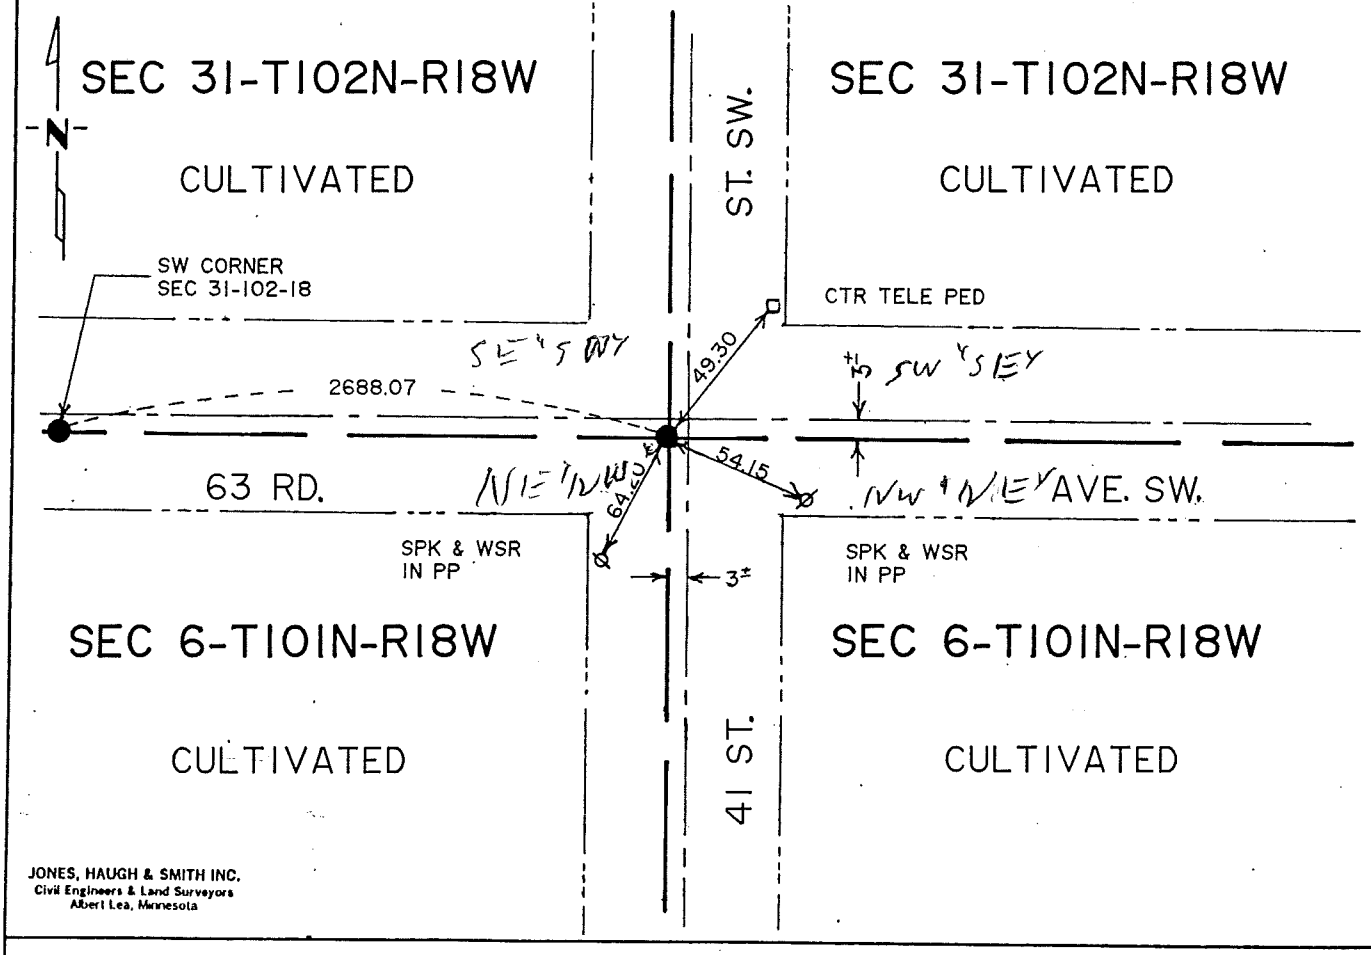

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 4-30-93 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 4 day of May A.D., 1993

COUNTY RECORDER Edward E. Enger

By Marlene Manton, Deputy

DOCUMENT NO. 420480

Bk mg misc Pg 326

M.H.D. FORM NO. 2105

BOOK 15 PAGE 326

STATEMENT OF EVIDENCE

S 1/4 corner Section 31-102-18

This corner was originally established by Deputy Surveyor Wm. I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1980 Jones, Haugh & Smith Inc crew dug a 3 foot deep hole and found a 2"x3" bar which lies in the west wheel track and south wheel track. Placed a 5/8" diameter iron near road surface above 2"x3" bar found.

1992 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, Reg. No. 13807, found 5/8" diameter iron set in 1980 which was placed above 2"x3" bar that was located at a depth of three feet. Accepted 2"x3" bar found in 1980 as best evidence of the location of the original public land survey corner. Left 5/8" diameter iron found in its original location.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 79 PAGE 327

Jones Haugh

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 32, Township 102N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 10/15/1991 (DATE) found a 1"ø x 16" IRON

☐ left monument as found, ☐ lowered monument, ☒ removed monument (explain)

☒ On 10/15/1991 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

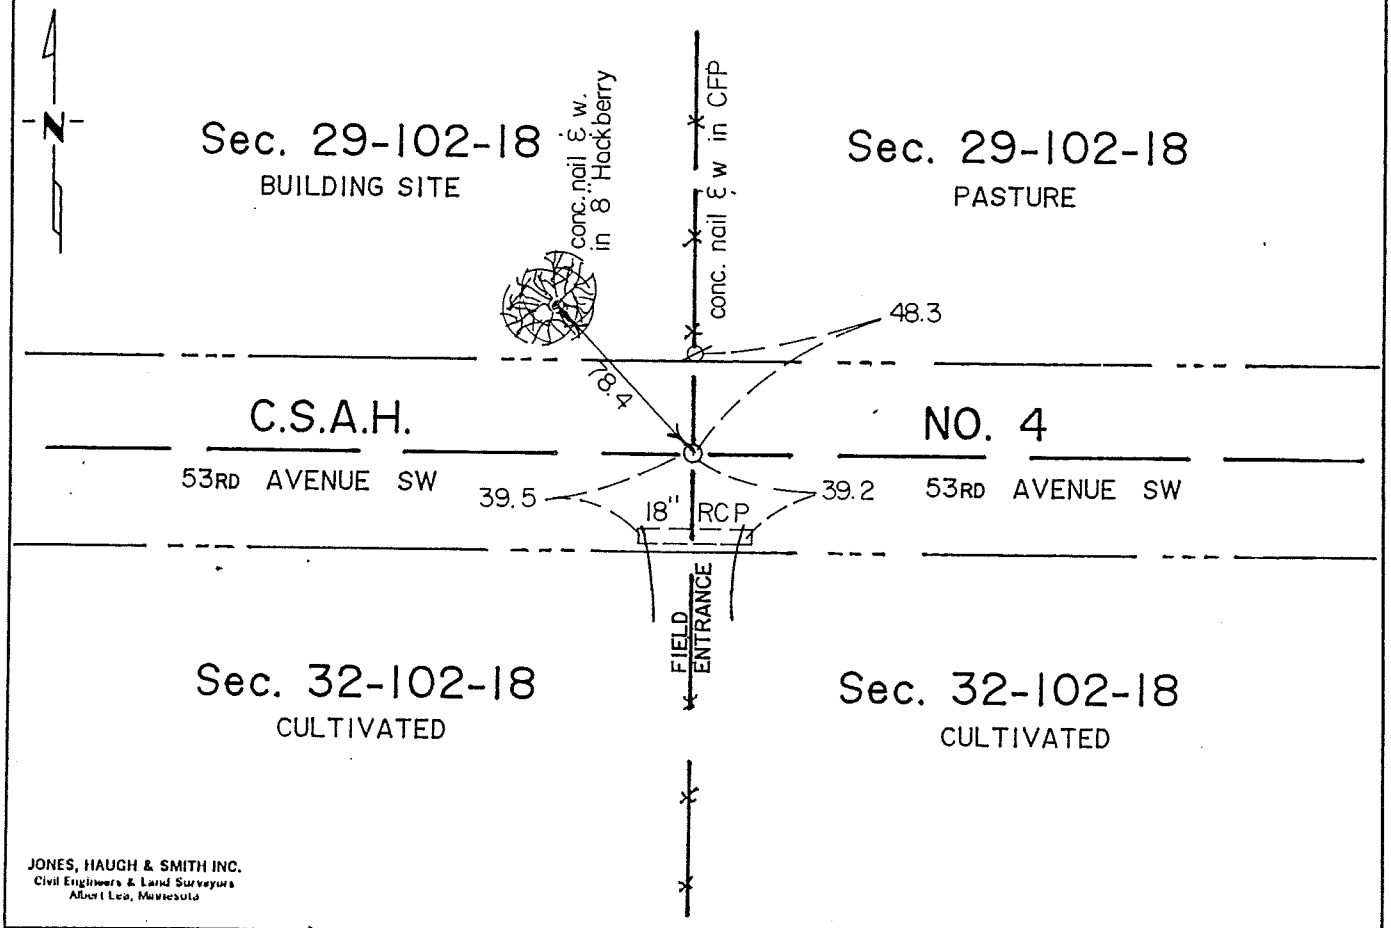

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-16-92

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Sec 32-102-18

This corner was originally established by Deputy Surveyor Wm. I Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of a perpetuation of the original public land survey corner.

1991 Jones, Haugh & Smith Inc crew under the direction of John Schulte IV, dug with the County backhoe on centerline of east-west road in line with fence north-south and uncovered a 1" diameter x 16" long iron one foot below road surface. Continued digging to a depth of 5 feet deep and found no further evidence of public land survey corner or a perpetuation thereof. Accepted 1" diameter iron as best evidence and set cast iron monument at same location.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 32, Township 102N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 10/15/1991 (DATE) found a CAST IRON MONUMENT

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

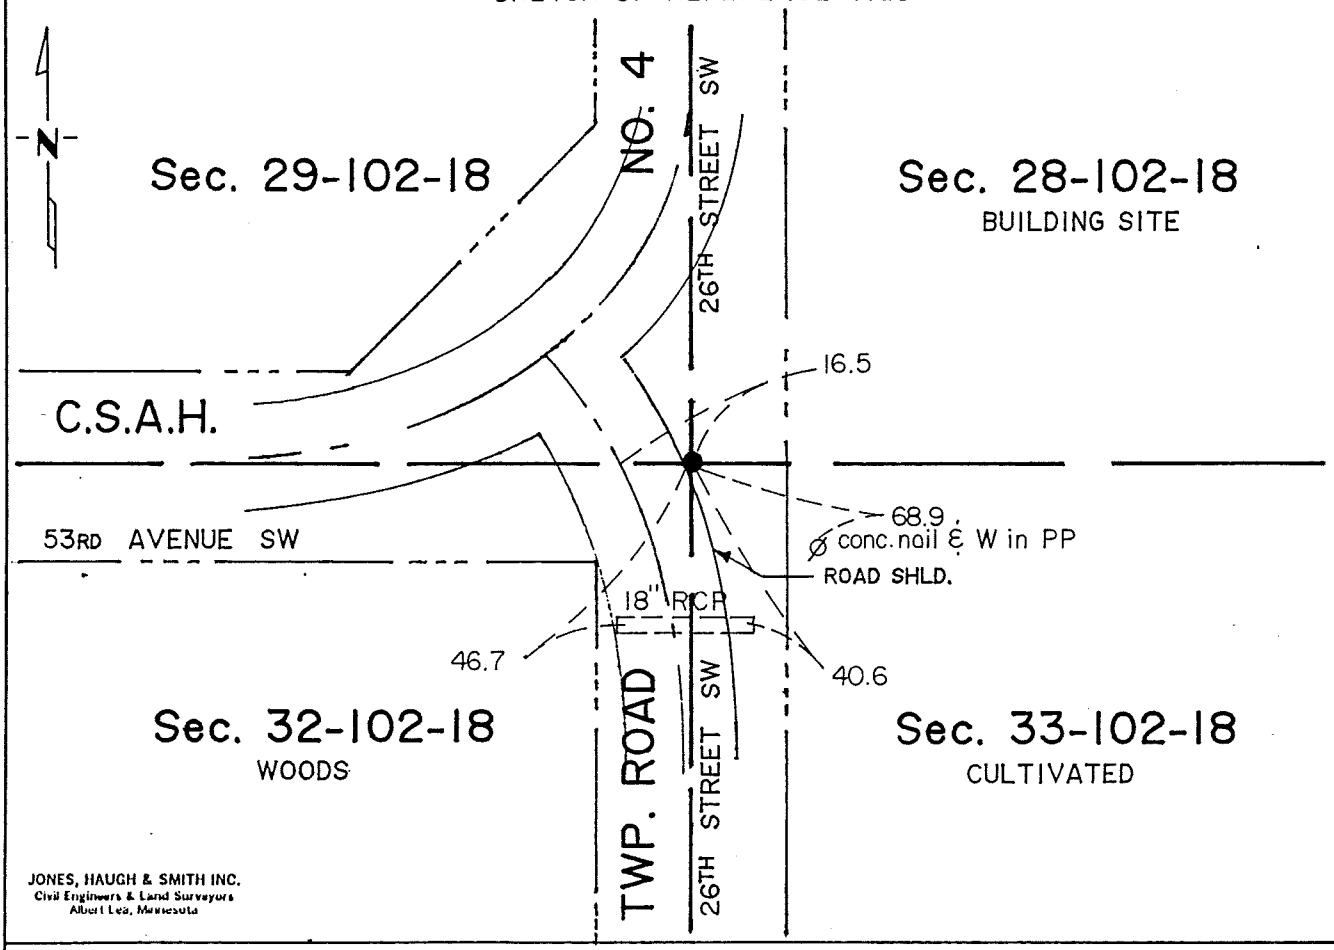

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-16-92

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NE corner Sec 32-102-18

This corner was originally established by Deputy Surveyor Wm. I Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:

Mower County Highway Dept	Zenk Engineering
Mower County Recorder	Tucker Land Surveying

1930 Mower County Grading Plans shows a monument inplace and the following ties were taken:
- 72.4' East to large Cottonwood Tree
- 49.0' SE to Cottonwood tree
- 48.0' SW to telephone pole
- 44.0' NW to CFP

1945 Recorded in Book "A" in the Office of the County Engineer a monument was found and ties checked with the additional ties taken:
- 122.6' SW to PP
- 123.75' NW to telephone pole

1953 Recorded in Book "A" a concrete monument was found and the following ties were taken:
- 88.8' SW to blazed 12" Oak
- 63.9' SE to spike in CFP
- 68.7' SE to PP
- 129.0' SW to PP

1982 County Grading Plan shows a cast iron monument set over concrete monument during grading project and ties were taken.

1991 Jones, Haugh & Smith Inc crew under the direction of John Schulte IV, dug with the County backhoe and uncovered a cast iron monument set by Mower County Engineering Department after road construction in 1982. At this time this intersection was obliterated during construction and relocated destroying all evidence of public land survey corner or a perpetuation thereof. The monument found is in agreement with ties taken in 1982 when the monument was reset.

The monument fits past records, occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 32, Township 102N, Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 5-8-86 (DATE) found a spike and washer; no evidence of PLS corner.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 5-8-86 (DATE) placed a 5/8"ø iron on road surface at location of spike found.

SKETCH OF REFERENCE TIES

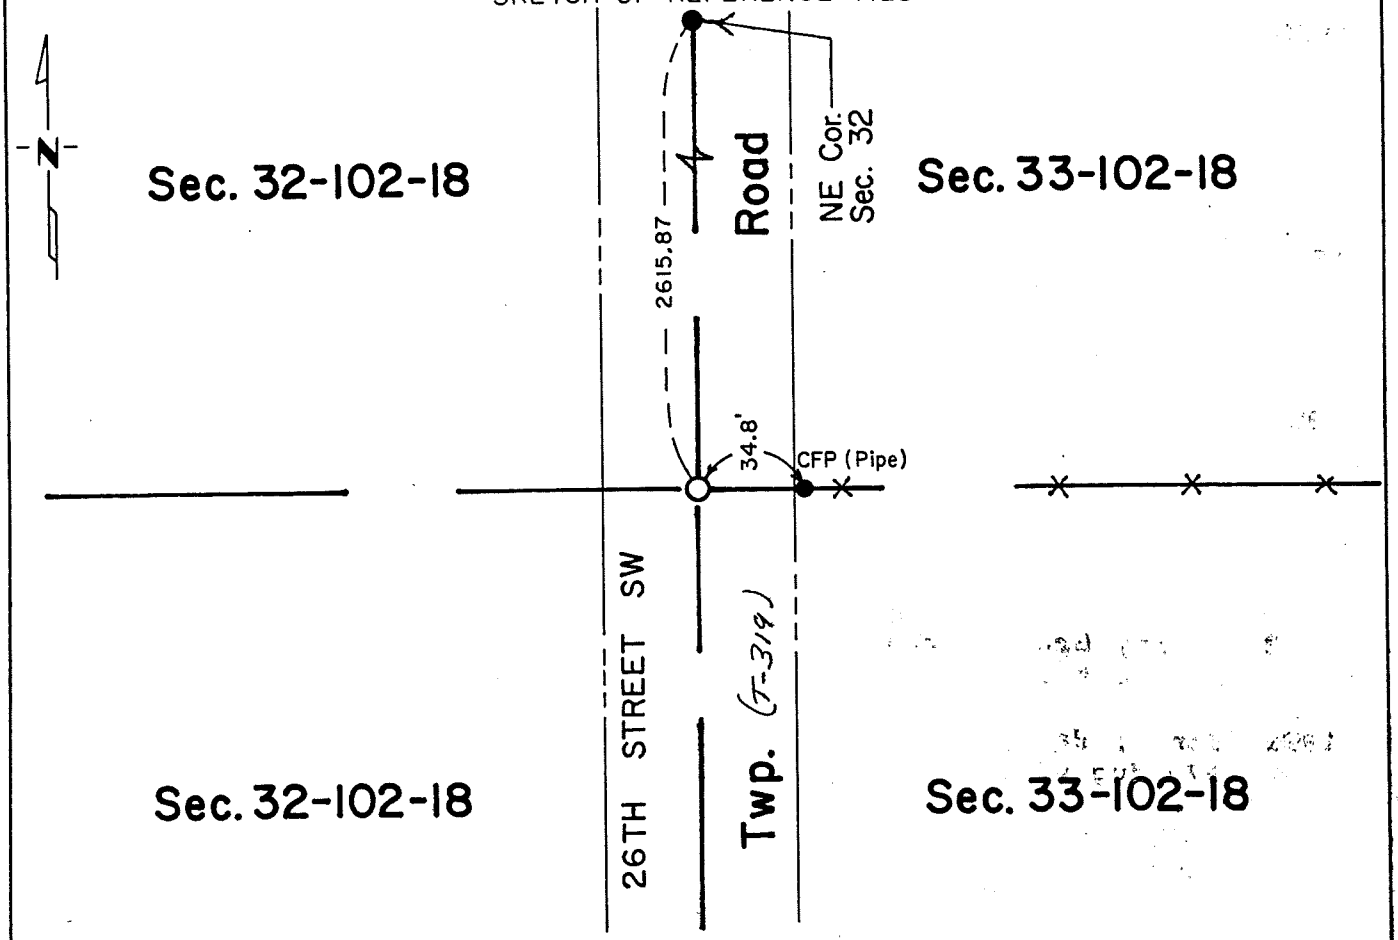

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-10-91

Registration No. 13607

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

E 1/4 corner Sec 32-102-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Survey Office in 1854. The government notes show this corner was marked with a post and the following ties were taken:

10" Burr Oak	South	83 links (54.78 ft)
10" Burr Oak	S 1 1/2° E	81 links (53.46 ft)

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorders Office

1981 Jones, Haugh & Smith crew under the direction of John H. Schulte IV dug in centerline road in line with fences east and west. Placed spike on W 1/4 corner of Section 33.

1986 Jones, Haugh & Smith crew found a spike and washer on centerline north-south road in line with fence east. Excavated with backhoe for original monument and found no further evidence of public land survey corner or a perpetuation thereof. Placed a 5/8" diameter iron on centerline of road surface at location of spike found.

Corner placed fits occupation and road centerline and is accepted as best evidence found of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 33, Township 102N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 4-17-81 (DATE) found a 1 1/2"Ø×2 1/2'bar 2.1'below road surface.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 4-17-90 (DATE) placed a 5/8"Ø iron monument found.

SKETCH OF REFERENCE TIES

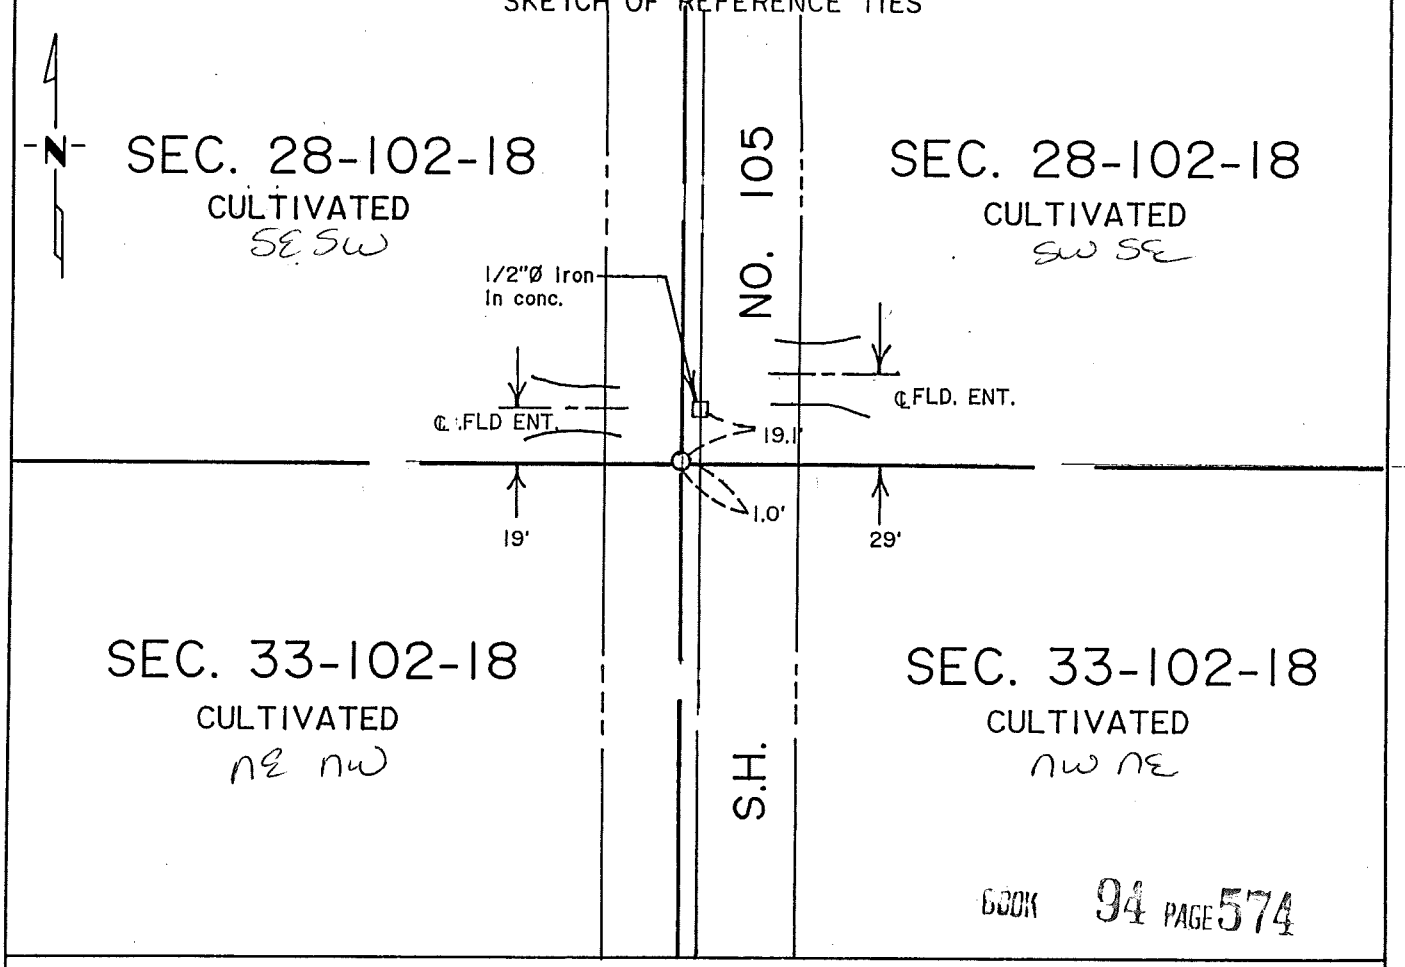

BOOK 94 PAGE 574

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 4-7-97 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P .M. on the 9 day of Apr A.D., 19 97

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 452262

M.H.D. FORM NO. 2105

Book 94 Misc Page 574

N 1/4 Cor SEC 33-102-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1953 Book A of the Mower County Engineering department shows a concrete monument inplace.

1957 Jones Haugh and Smith crew located corner during a survey in the NE 1/4 SW 1/4 section 33.

1981 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, located a concrete monument with a 1/2" diameter iron on CL .5' below road surface. True corner is 19.1' south. Uncovered a 1 1/2"x2 1/2" bar 2.1' below road surface. Placed a 5/8" iron over 1 1/2" bar. The bar found is the same size and diameter of other corners found in this section which were typical of the monuments set by Mower County surveyor, Clausen, in the late 1800's.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 34, Township 102N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 09/17/1994 (DATE) found a CAST IRON MONUMENT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 09/17/1994 (DATE) placed a _____

SKETCH OF REFERENCE TIES

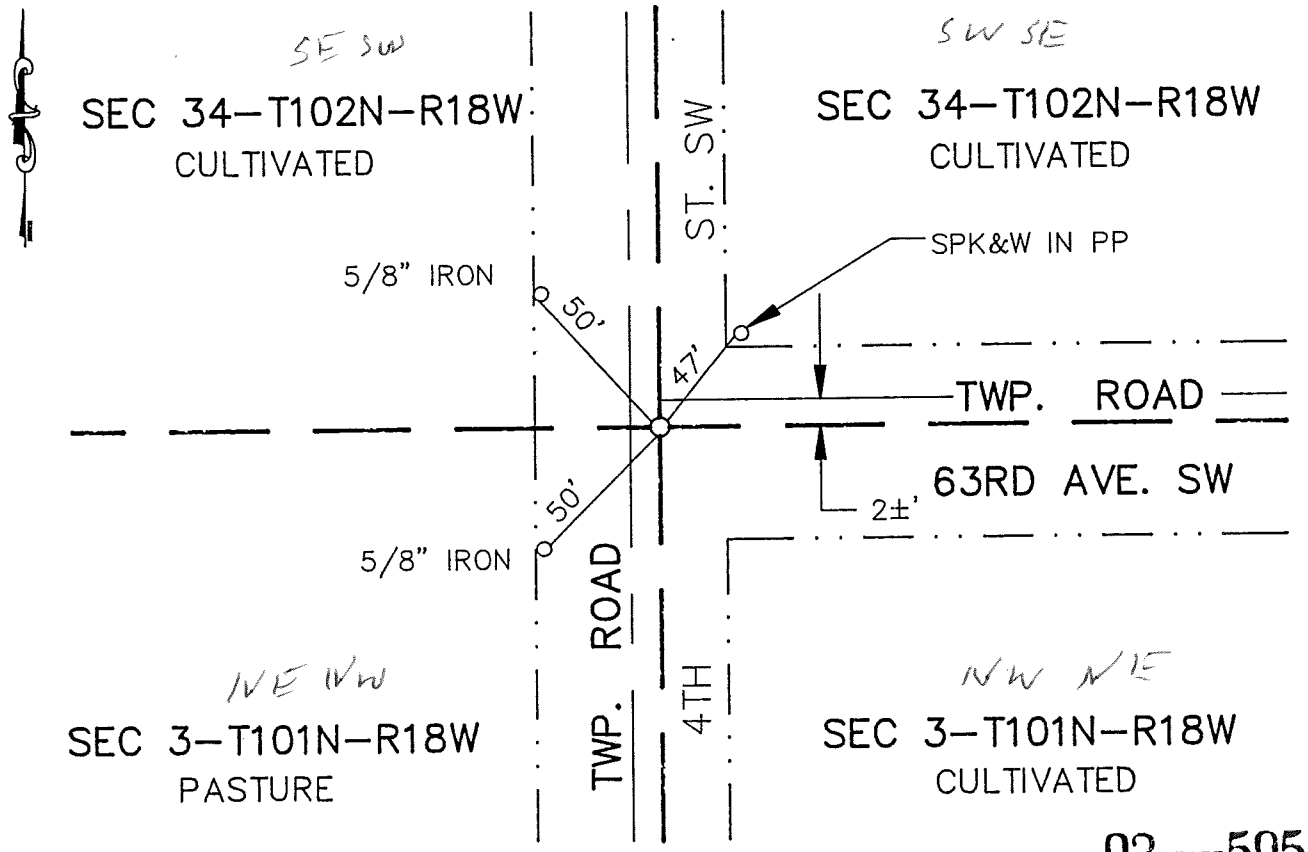

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 93 PAGE 595

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

[signature] 1-9-97
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4 P.M. on the 14 day of Jan A.D., 1997

COUNTY RECORDER Charles Enger
By Susan M Davis, Deputy
DOCUMENT NO. 450526

M.H.D. FORM NO. 2105

Bk 93 Misc Page 595

S 1/4 Cor SEC 34-102-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1994 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, located a cast iron monument 1' below road surface, 2' south of CL of township road to east.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 34, Township 102N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/15/1996 (DATE) found a CONC. MONUMENT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 05/15/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

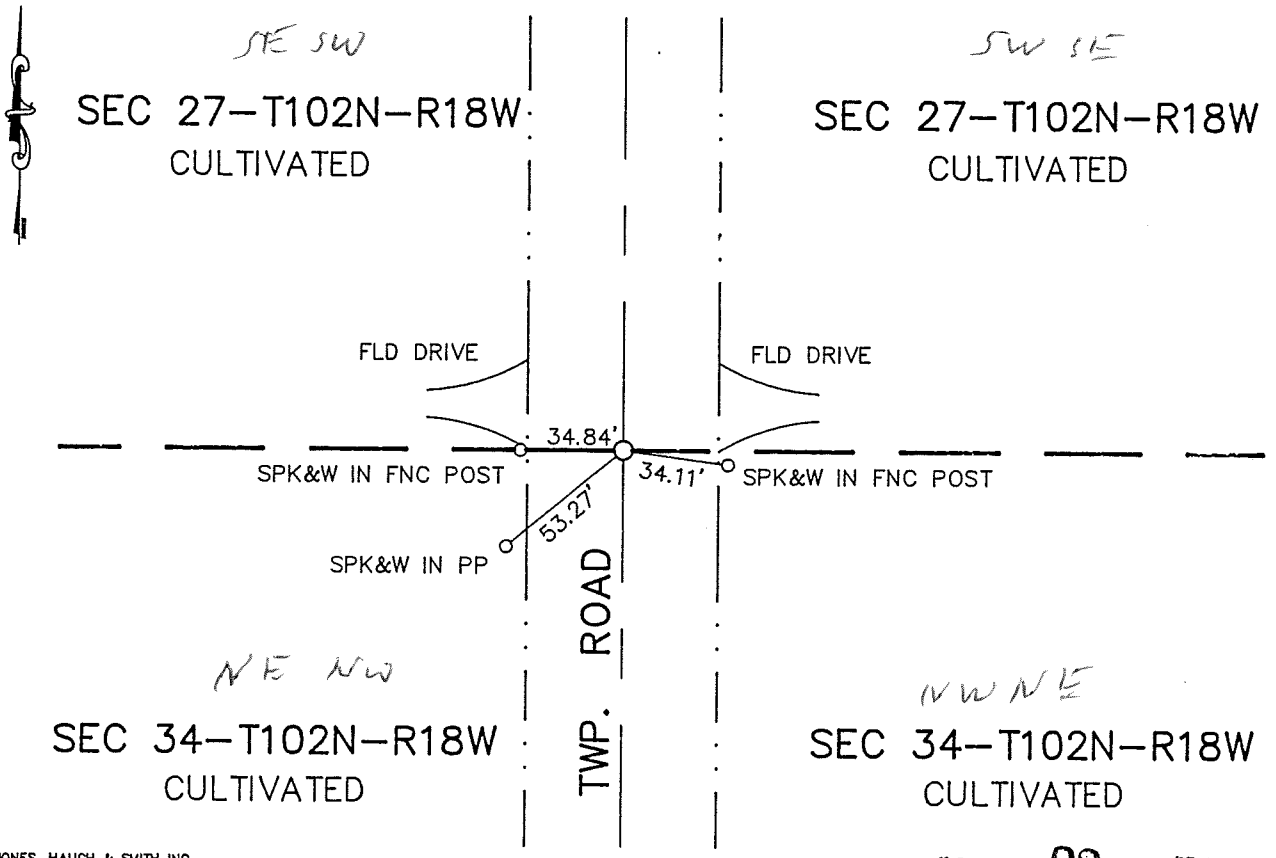

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 93 PAGE 593

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 1-9-97 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4 P.M. on the 14 day of Jan A.D., 1997

COUNTY RECORDER Charles Engen

By Susan M Davis, Deputy

DOCUMENT NO. 450525

M.H.D. FORM NO. 2105

Book 93 Misc Page 593

N 1/4 Cor SEC 34-102-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1930 Mower County Book "A" shows a monument at this location.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of township road N-S. Uncovered a concrete monument 0.8' below the road surface. Drilled a 3/4" hole in the found monument and set a cast iron monument 0.40' below road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 35, Township 102N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On _____ (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 09/13/1994 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

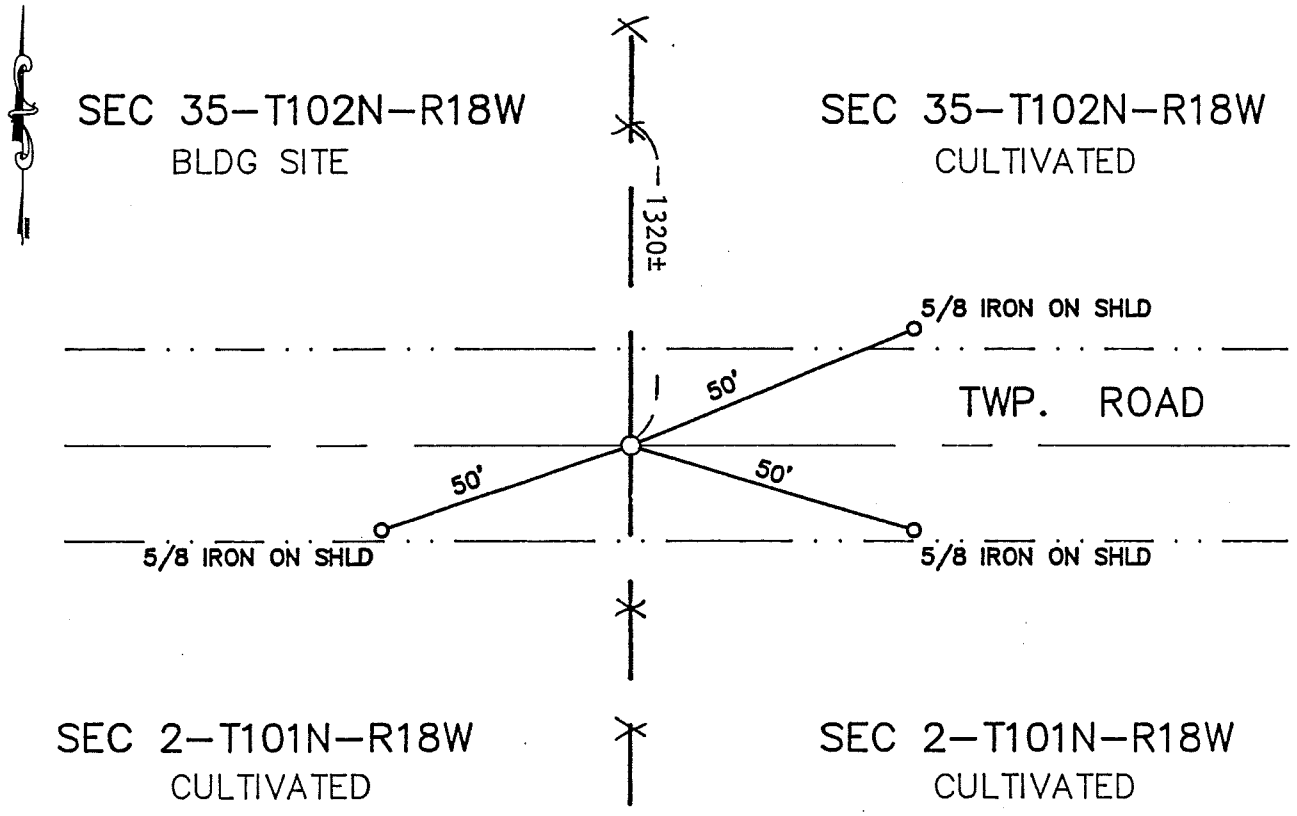

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 8-16-96 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

S 1/4 Cor SEC 35-102-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1994 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at CL township road and in line with fence south. No evidence of the corner was found. A cast iron monument was set on a straight line between the S 1/4 corner of Section 34 and the SE corner of Section 35 in line with fence to the south and in line with a north-south fence line on the north-south 1/4 section line of said Section 35 approximately 1/4 mile north of this corner.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 35, Township 102N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/15/1996 (DATE) found a POINTED STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 05/15/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

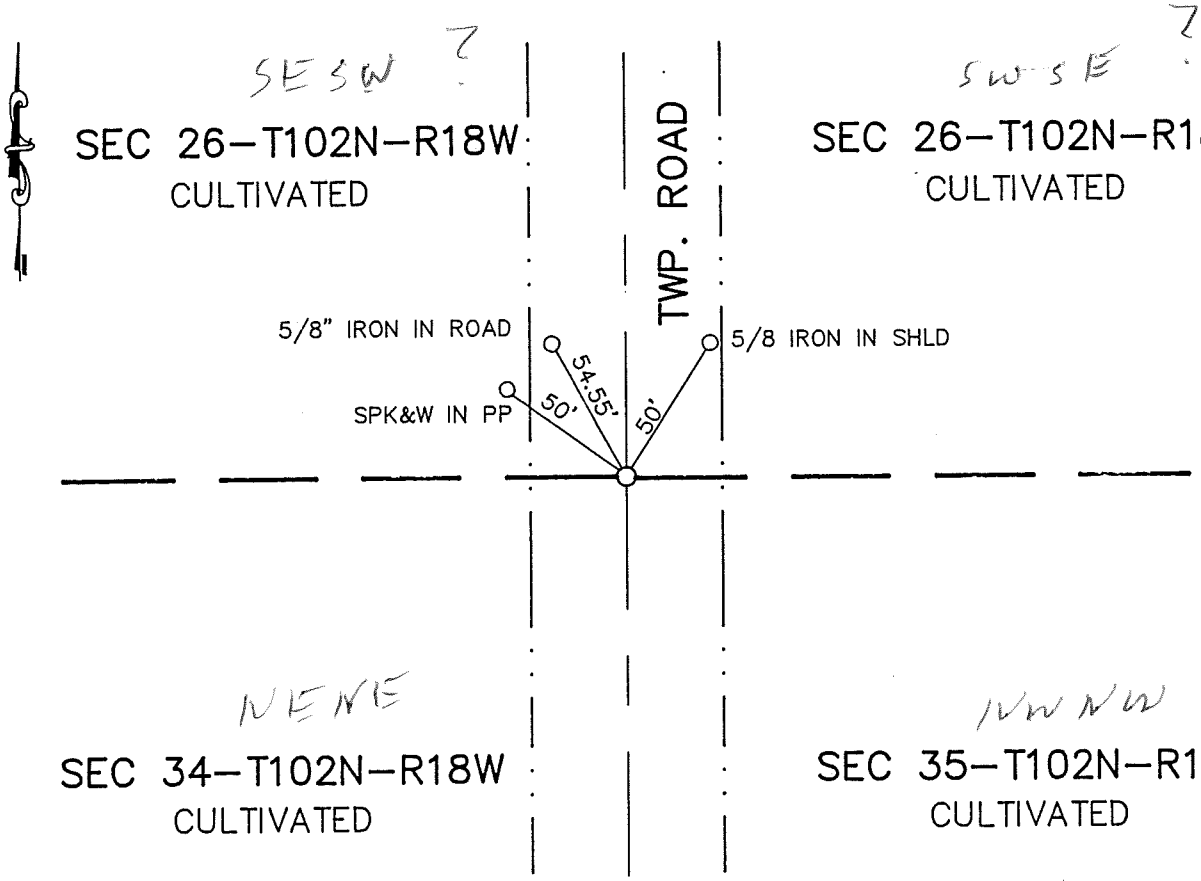

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 93 PAGE 597

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

[signature] 1-9-97
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4 P.M. on the 14 day of Jan A.D., 1997

COUNTY RECORDER Charles Singer

By Susan M. Davis, Deputy

DOCUMENT NO. 450527

M.H.D. FORM NO. 2105

Book 93 Misc Page 597

W 1/4 Cor SEC 35-102-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of township road N-S and in line with line fence west. Found no evidence of original PLS corner. Placed a cast iron monument on the CL twp. road and in line with line fence to west.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 35, Township T102N Range R18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 9-13-94 (DATE) found NO EVIDENCE OF CORNER

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 9-13-94 (DATE) placed a 5/8"X16" IRON WITH CASTIRON MON.

SKETCH OF REFERENCE TIES

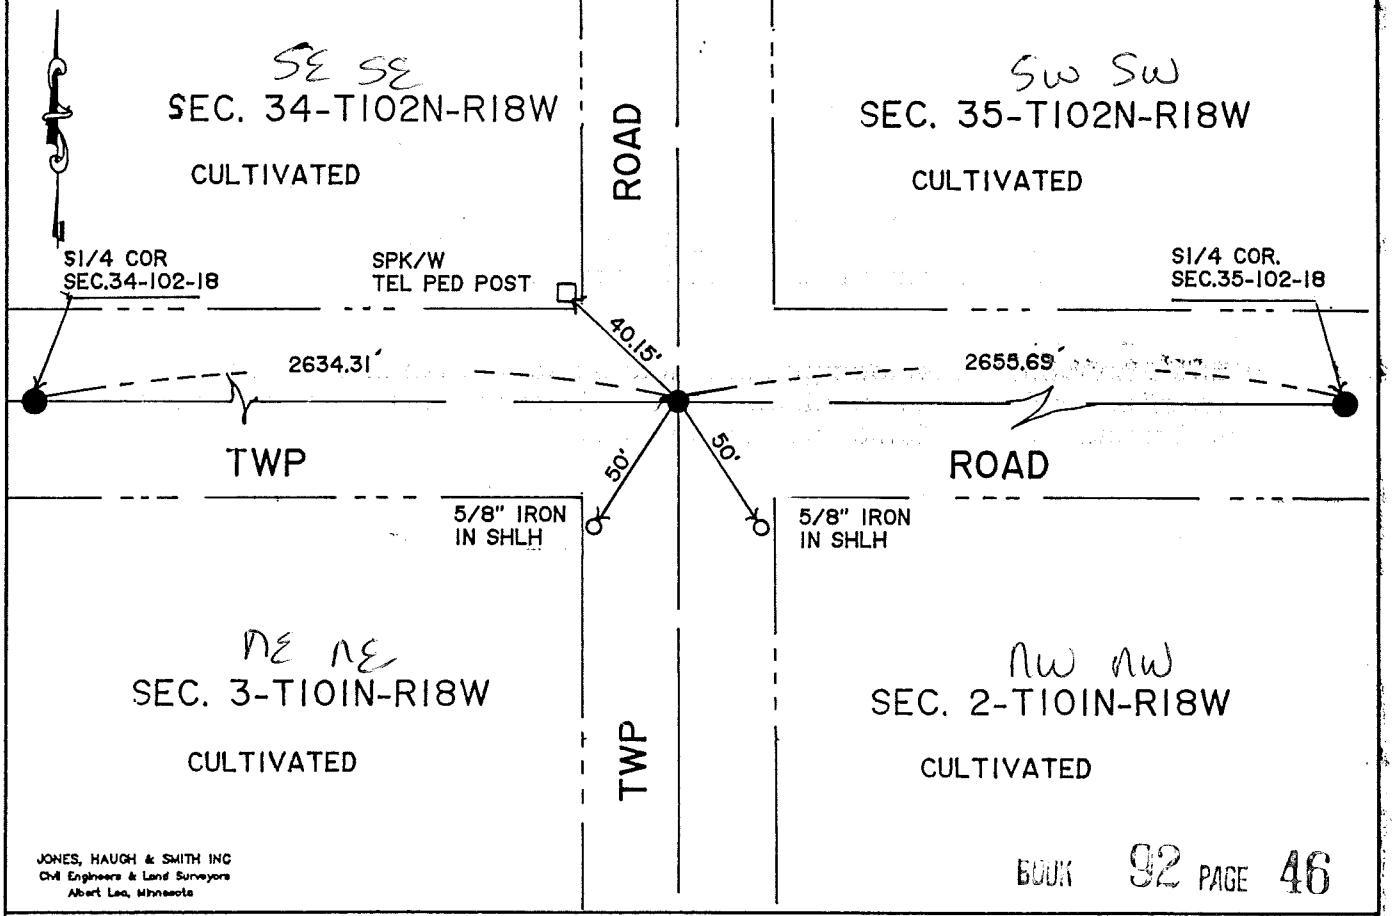

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 92 PAGE 46

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-25-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

446685

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 9 a .M. on the 29th day of July A.D., 1996

COUNTY RECORDER Charles Enger

By Melinda Taylor, Deputy

DOCUMENT NO 446685

M.H.D. FORM NO. 2105

Book 92 Page 46 Misc

SW Cor SEC 35-102-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1994 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at CL CL intersection of twp. roads. No evidence of the corner was found. A cast iron monument was set on a straight line between the south 1/4 corner of section 34 and the south 1/4 corner of section 35, in line with the road centerlines.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.