Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 36, Township 103N Range 15W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 4-13-1992 (DATE) found a POINTED FIELD STONE WITH CLAY BRICK OVER.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 4-13-1992 (DATE) placed a 5/8" DIA. IRON UNDER STONE AND A 5/8" DIA. IRON CAPPED RLS 13807 OVER.

SKETCH OF REFERENCE TIES

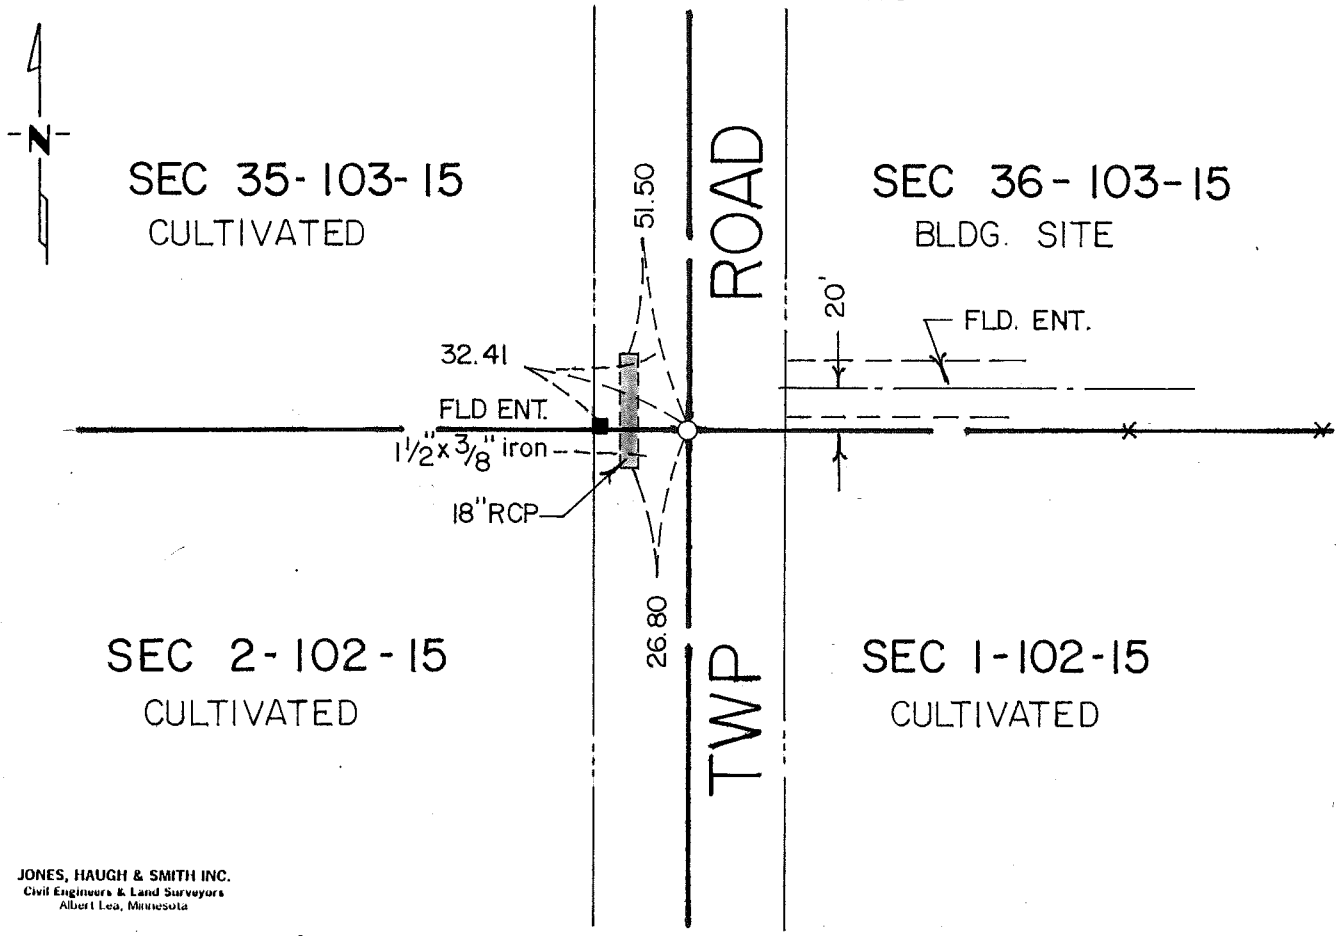

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ SIGNATURE 4-27-92 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Sec 36-103-15

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Recorder's Office
Mower County Highway Department

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1892 Clausen, Mower County Surveyor, uncovered a stone monument while subdividing the N 1/2 Sec 35.

1946 C.E. Milner, RLS 1476, uncovered a stone monument and the following ties were taken:
32.5' west to iron
45.9' east to 18" Cottonwood
49.1' southeast clump 6' willows
54.7' northeast CFP

1992 Jones, Haugh & Smith Inc crew under the direction of John Schulte, dug with the County backhoe and uncovered a capped pipe on road surface. Continued digging and uncovered a clay brick over a 6"x19" pointed field stone 19" deep. Placed a capped 5/8" diameter iron under stone and set a 5/8" diameter iron capped RLS 13807 over stone on road surface. The capped pipe found on road surface was 0.56 feet north of true corner.

The monument found agrees with past records and fits occupation and road centerlines within the section.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 36, Township 103N Range 15W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 4/13/1992 (DATE) found a 6" CONC. MON. OVER POINTED FIELD STONE.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 4/13/1992 (DATE) placed a 5/8" DIA. IRON OVER CONCRETE MON. OVER STONE.

SKETCH OF REFERENCE TIES

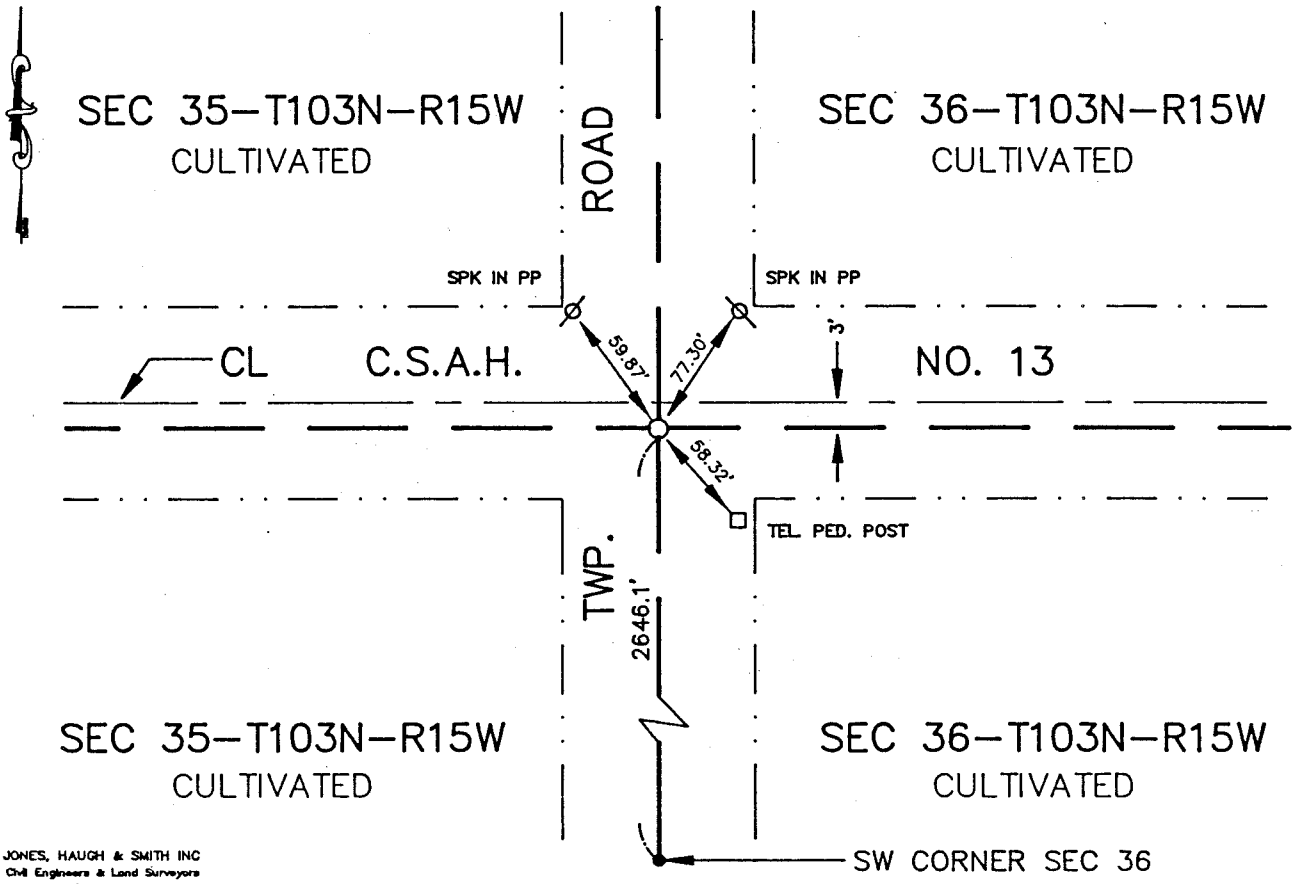

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 11-24-92

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Section 36-103-15

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1945 Book A in the office of the Mower County Highway Department shows the following information was taken to support evidence of a perpetuation of the original public land survey corner:
Pieces of former concrete tile monument found inplace above stone monument. Set stone monument with iron bolt above stone 4" below road surface. The following ties were taken:
72.2' NE 16" Maple
47.6' NW br. girder corner fence post
27.0' SE end 24" CMP
52.3' SW end 18" S.C. cult

1948 Book A in the office of Mower County Highway Department indicates pieces of tile was inplace. The following ties were taken:
46.2' SE to willow tree
72.2' NE to maple tree
42.4' NW to tele pole
37.6' SW to tele pole

1992 Jones, Haugh & Smith Inc crew, under the direction of John H. Schulte IV, dug with county backhoe and at a depth of 18" found a concrete monument with 1/2" diameter iron in center, 3.25 feet south and one foot west of 3/4" diameter pipe found on road surface. Continued digging and found 3/4" bolt over a pointed field stone. Set concrete monument over stone and 5/8" diameter iron capped RLS 13807 over monument on road surface.

The monument found fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 36, Township 103N Range 15W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 4-13-1992 (DATE) found a 6" DIA. CONCRETE MONUMENT OVER 3/4"x24" BOLT OVER POINTED FIELD STONE.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 4-13-1992 (DATE) placed a 6" DIA. CONCRETE MONUMENT OVER STONE. PLACED 5/8" DIA. IRON CAPPED RLS 13807 OVER STONE.

SKETCH OF REFERENCE TIES

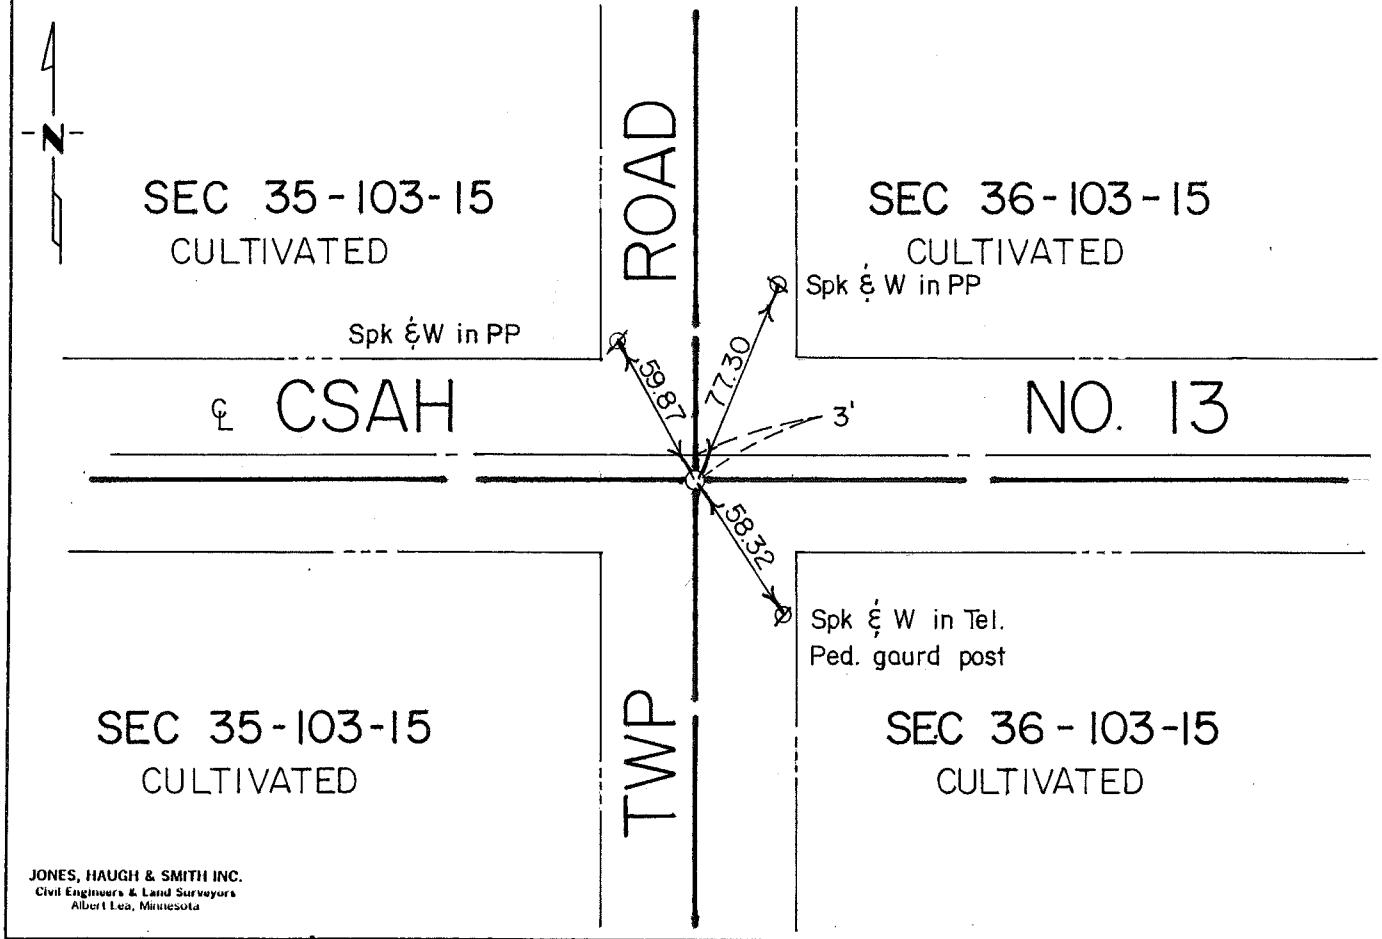

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ SIGNATURE 4-27-92 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Section 36-103-15

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder's Office

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1889 Clausen, Mower County Surveyor, uncovered a stone monument while subdividing the N 1/2 Section 35.

1946 C.E. Milner, RLS 1476, uncovered pieces of former concrete tile over stone monument. Placed a bolt over stone and the following ties were taken:

16" Maple	72.2' NE
Br Grider	47.6' NW
End 24" CMP	27.0' SE
End 12" CMP	52.3' SW

1955 Mower County Highway Department uncovered stone monument and set concrete monument over stone. The following ties were taken:

46.2' SE to Willow tree
72.2' NE to Maple tree
42.2' NW to telephone pole
37.6' SW to telephone pole

1992 Jones, Haugh & Smith Inc crew under the direction of John Schulte IV, dug with the County backhoe on centerline centerline and uncovered a capped pipe. Continued digging and found no further evidence. After taking measurement within the section, dug at a point three feet south of capped pipe as per records of C.E. Milner a distance of 2646.3 feet north of southwest corner of Section 36 and uncovered a 6" diameter concrete monument over a 3/4" bolt over a large pointed field stone 3.5 feet deep in virgin soil. Re-set concrete monument over stone and set 5/8" diameter iron capped RLS 13807 over concrete monument on road surface. The pipe on surface was 3.2 feet north one foot east of true corner.

The monument found agrees with past records and fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 36, Township 103N Range 15W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On _____ (DATE) found a 3/4"ø x 12" IRON CONTINUIED DIGGING AND FOUND 6"x18" POINTED FIELD STONE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a 5/8"ø IRON CAPPED 13807 UNDER STONE AND OVER

SKETCH OF REFERENCE TIES

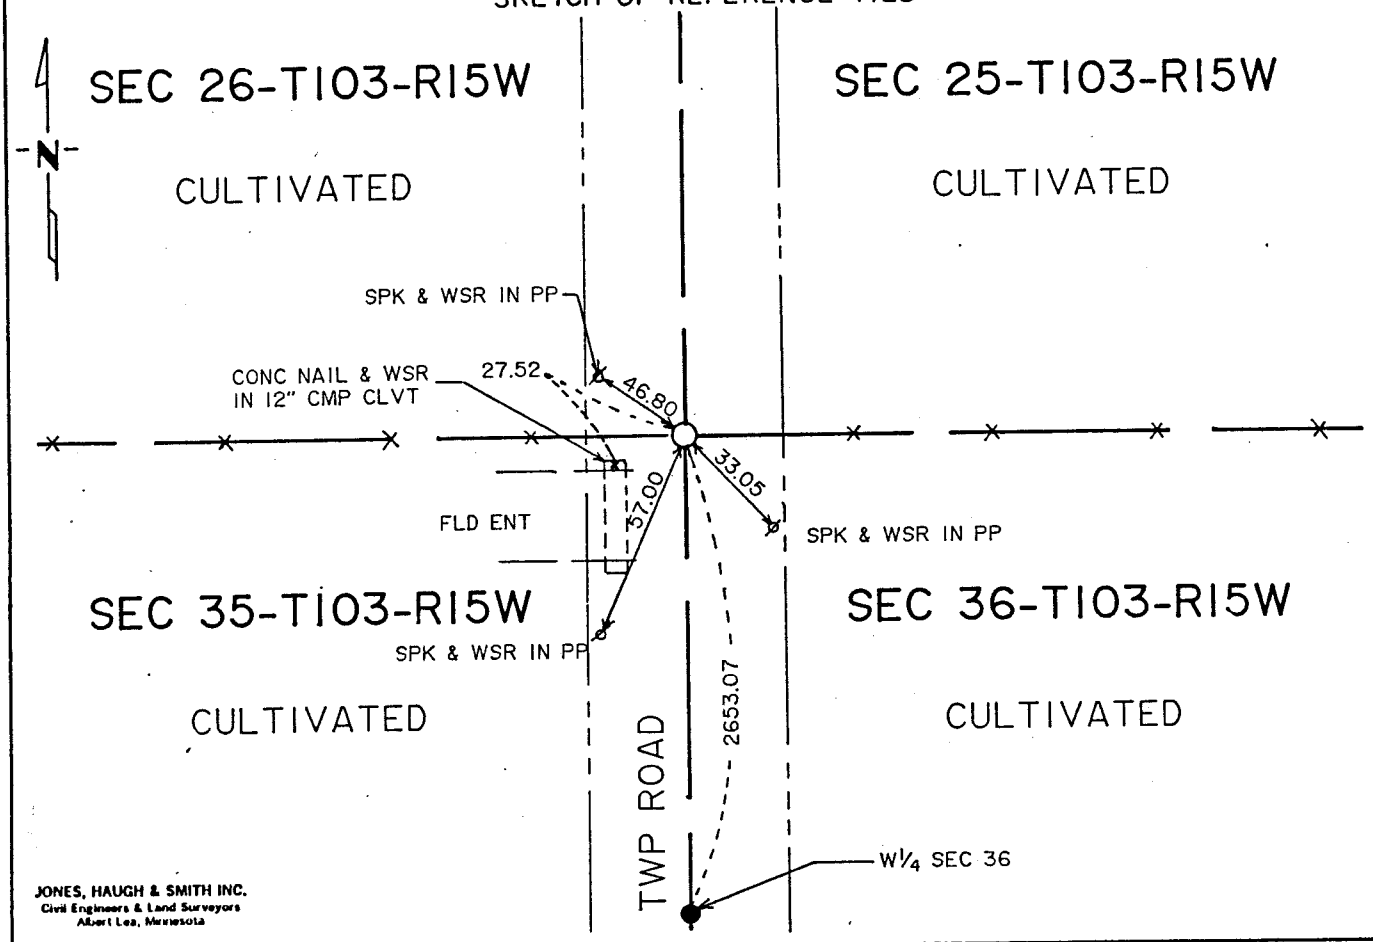

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 11-24-92

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Section 36-103-15

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:

Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1945 Book A in the office of Mower County Highway Department indicates a stone monument found inplace by CE Milner RLS 1476. The following ties were taken:

32.70' NE to braced gate post
28.40' E to corner fence post
36.80' SW to fence post
27.70' W to corner fence post
33.70' NW to fence post

1992 Jones, Haugh & Smith Inc crew, under the direction of John H. Schulte IV, dug with county backhoe on centerline north-south road in line with fence east and west and uncovered a 3/4" diameter x 12" iron 0.1" deep. Continued digging and uncovered a point field stone 6"x18". Stone was 18" deep. Placed a capped iron RLS 13807 under stone and over 0.8" north and 1.5' east of iron.

The monument found fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 36, Township 103N Range 15W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 4-13-1992 (DATE) found a POINTED FIELD STONE.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 4-13-1992 (DATE) placed a 5/8" DIA. IRON UNDER STONE AND PLACED A 5/8" DIA. IRON CAPPED RLS 13807 OVER STONE.

SKETCH OF REFERENCE TIES

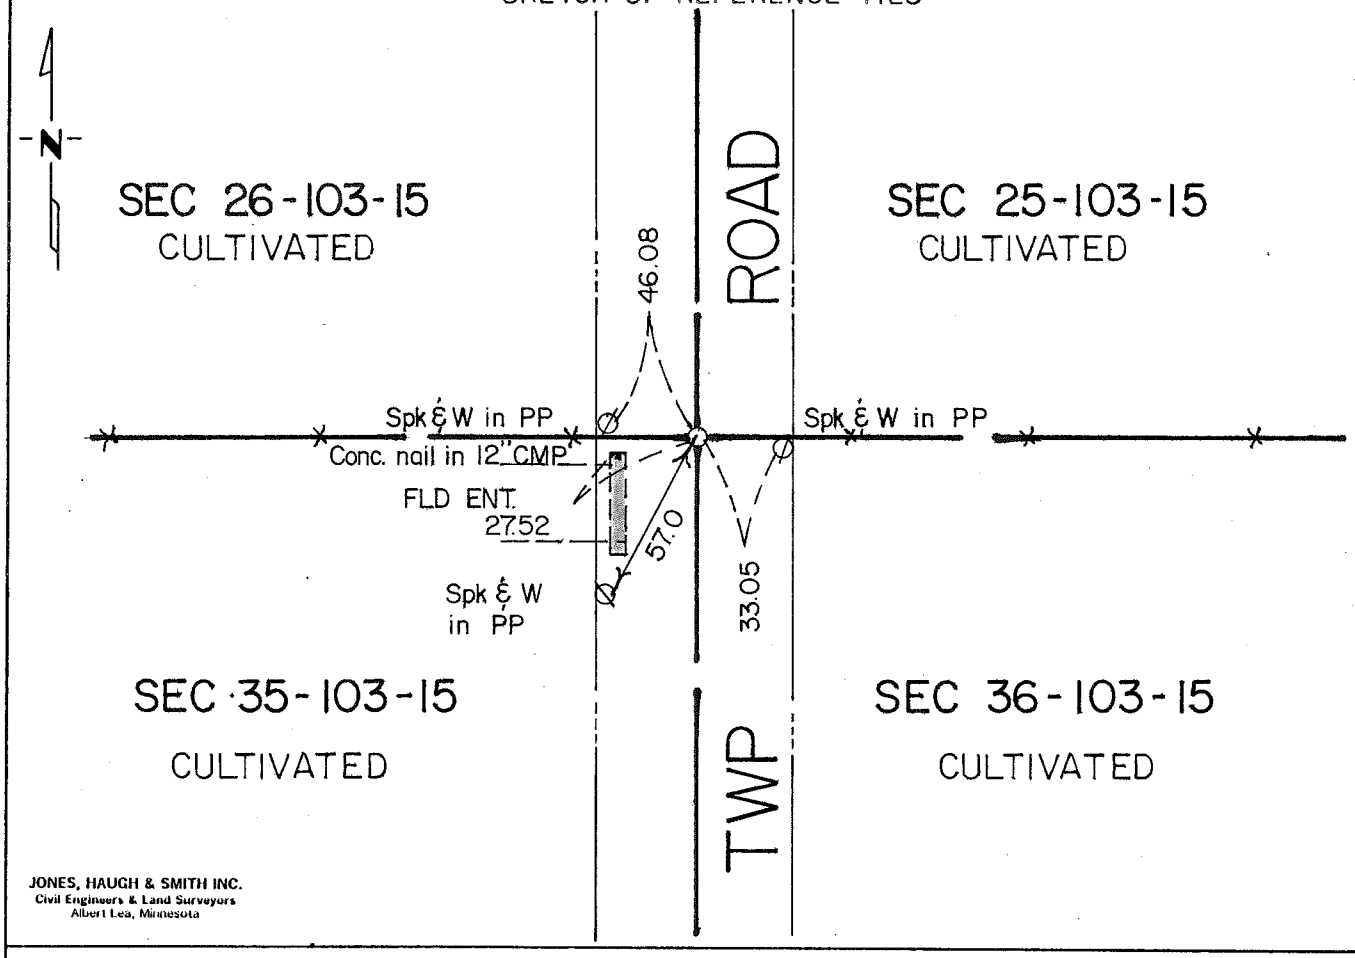

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ (SIGNATURE) 4-27-92 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Sec 36-103-15

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Recorder's Office
Mower County Highway Department

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1892 Clausen, Mower County Surveyor, uncovered a stone monument while subdividing the N 1/2 Sec 35.

1946 C.E. Milner, RLS 1476, uncovered a stone monument 14" below road surface and the following ties were taken:

CFP	28.3' East
Brace post	35.7' East
Fence post	45.0' SW
CFP	34.1' West

1992 Jones, Haugh & Smith Inc crew under the direction of John Schulte, dug with the County backhoe on the centerline north-south road in line with fences east and west and uncovered a 3/4" diameter x 12" iron on road surface. Continued digging and uncovered a 6"x18" long pointed field stone 18" deep in virgin soil. Placed capped 5/8" diameter iron under stone and set capped 5/8" diameter (RLS 13807) over stone on road surface. The 3/4" diameter iron found on surface was 0.8' south 1.5' west of true corner.

The monument found agrees with past records and fits occupation and road centerlines within the section.