TIES BOOK P70 "A"

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 20, Township 103N, Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☑ On 1-27-84 (DATE) found a concrete mon. with iron pin in center 2'± deep

☑ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☑ On 1-27-84 (DATE) placed a cast iron moument over conc. marker

SKETCH OF REFERENCE TIES

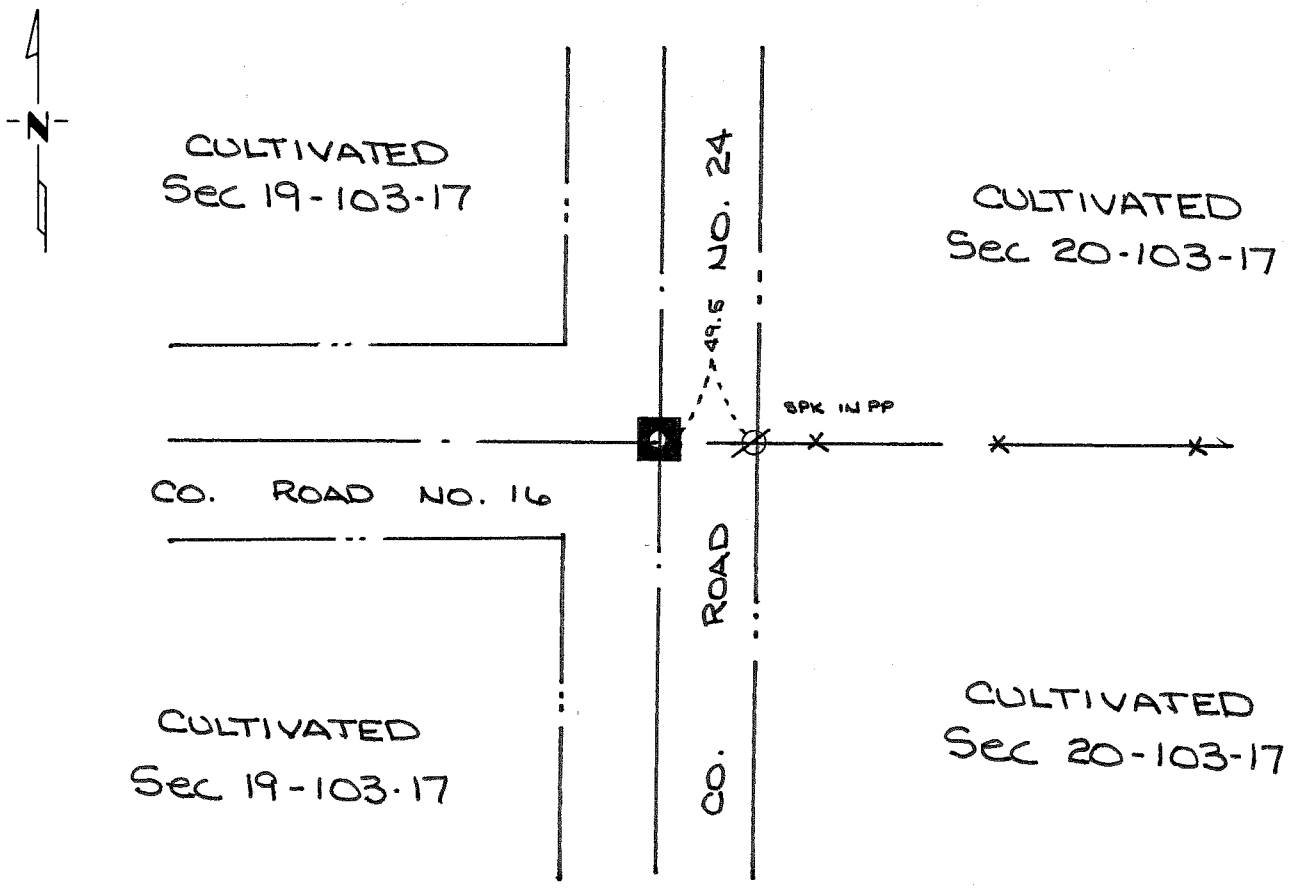

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

J. H. [illegible] 2-7-84
SIGNATURE DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

$W\frac{1}{4}$ corner Section 20-103-17

1856 Wm I. Anderson, Deputy Surveyor, set wood post during public land survey.

1954 Records from Mower County Engineer shows a concrete monument was found and ties were set during road survey.

1984 Jones, Haugh & Smith crew dug for $\frac{1}{4}$ corner in bituminous surface road and at a depth of two feet more or less. Found a concrete monument with a iron pin cast in center of the monument.

The monument found is in agreement with Mower County records and fits occupation and road centerlines and is accepted as a perpetuation of the public land survey corner.