CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 30, Township 104, Range 15, 5th P.M. STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 6-13-90 found a Nothing

☐ left monument as found, ☐ lowered monument, ☐ removed monument (expl.)

☒ On 6-22-90 placed a Standard Concrete Monument

SKETCH OF REFERENCE TIES

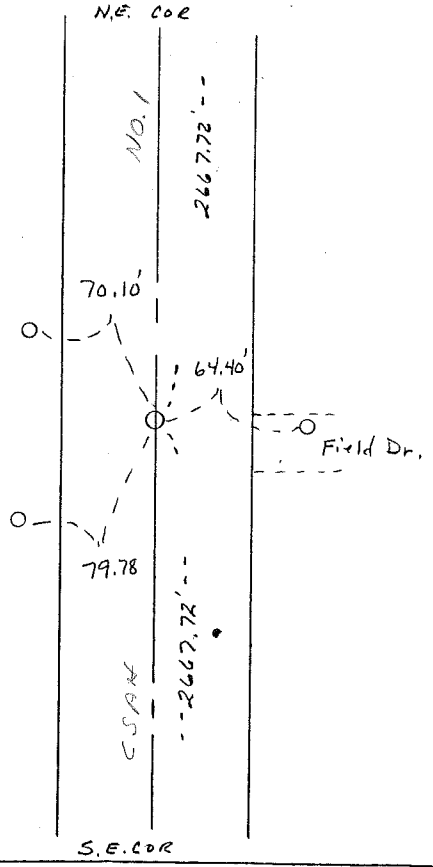

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Raymond Tucker — Signature
6-29-90 — Date

Registration No. 15471
☒ Land Surveyor, ☐ Prof. Engineer
☐ County Surveyor, ☐ County Engr.

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____.M. on the ___ day of _____ A.D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

STATEMENT OF EVIDENCE:

EAST QUARTER CORNER SECTION 30 - T104N - R15W

1853 - John Quigley, Deputy Surveyor, set a quarter section post built mound with trench per instruction put handfull small stones in center and planted osage orange seed in SE corner during the Original Public Land Survey.

June 1990 - Tucker Land Surveying excavated this location and found nothing. Placed a Standard Concrete Monument.

The above corner agrees with a electronic survey made of monuments and occupation lines in the area and is accepted as a perpetuation of the public land survey corner.

For details of the analysis and electronic survey data contact: Tucker Land Surveying, Dexter, Minnesota 55926.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 30, Township ~~103~~ 104, Range 15,

5th P.M. STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 6-13-90 found a Concrete Monument 1.0' below surface on centerline of road.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (expl.)

☐ On _____ placed a _____

SKETCH OF REFERENCE TIES

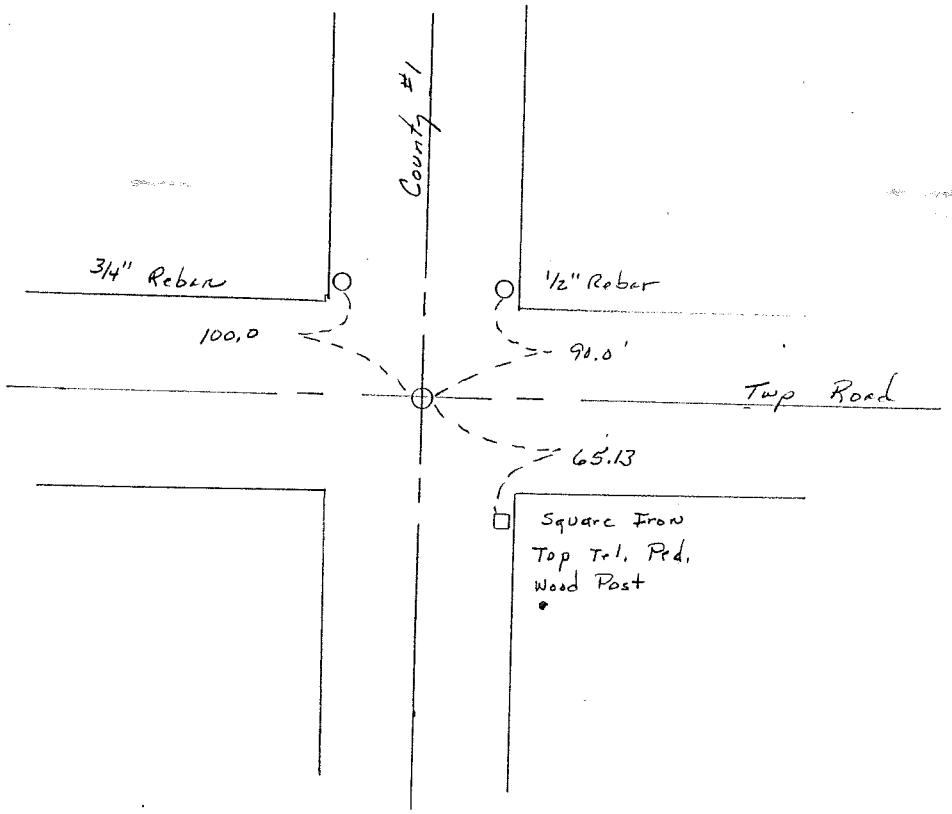

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Raymond J. Tucker — Signature

6-29-90 — Date

Registration No. 15471

☒ Land Surveyor, ☐ Prof. Engineer

☐ County Surveyor, ☐ County Engr.

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____.M. on the ___ day of _____ A.D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

STATEMENT OF EVIDENCE:

NORTHEAST CORNER SECTION 30 - T~~103~~104N - R15W

1853 - John Quigley, Deputy Surveyor, set post for corner, built mound, with trench per instructon put handfull small stones in center and planted osage orange seeds in SE corner during the Original Public Land Survey.

1949 - Mower County Highway Department notes show an inplace concrete monument.

March 1990 - Mower County Highway Department notes show an inplace concrete monument.

June 1990 - Tucker Land Surveying excavated this location and found a concrete monument 1.0 feet below on Centerline of road.

The above corner agrees with a electronic survey made of monuments and occupation lines in the area and is accepted as a perpetuation of the public land survey corner.

For details of the analysis and electronic survey data contact: Tucker Land Surveying, Dexter, Minnesota 55926.

TIE BOOK P. 89

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 31, Township 104N, Range 15W, 5th P.M. STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On Dec. 5, 1980 found a steel rod in concrete monument

☒ left monument as found, ☐ lowered monument, ☐ removed monument (expl.)

☒ On Dec. 5, 1980 placed a cast iron Monument over concrete monument

SKETCH OF REFERENCE TIES

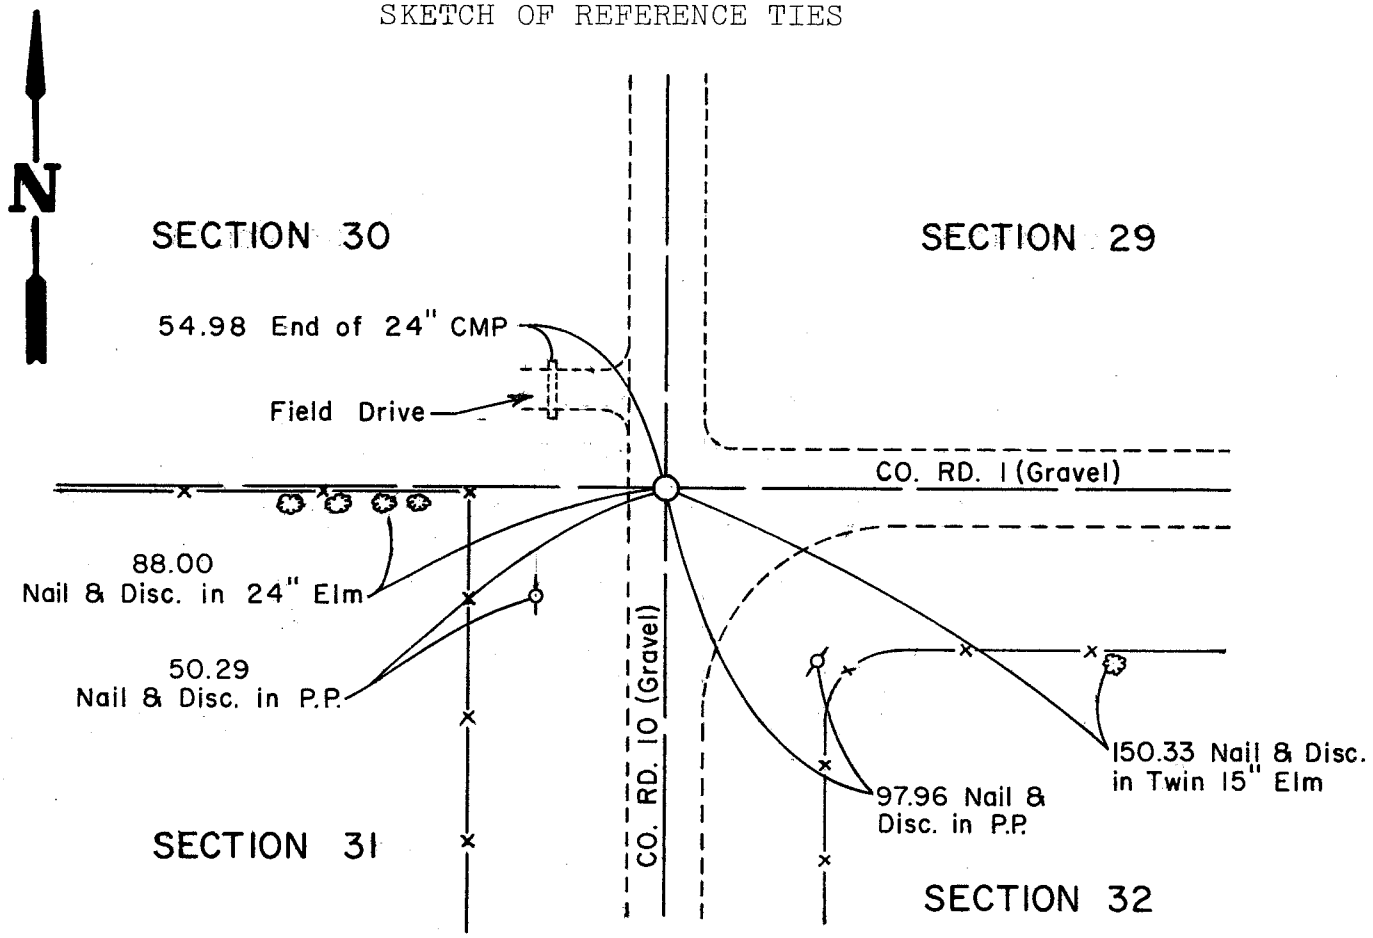

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald J. Olson — Signature
12-16-80 — Date

Registration No. 11009
☒ Land Surveyor, ☒ Prof. Engineer
☐ County Surveyor, ☐ County Engr.

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____.M. on the ___ day of _____ A.D., 19____.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

STATEMENT OF EVIDENCE:

NORTHEAST CORNER OF SECTION 31, TOWNSHIP 104 NORTH, RANGE 15 WEST, 5th P.M.

July, 1853 — John Quigley, Deputy Surveyor, set the corner during the original Public Land Survey.

Dexter Township, Mower County, Minnesota constructed Township roads North-South and East in the vicinity of the corner.

1930's-1940's — Mower County set concrete monuments at some corners in the county.

1952 — Mower County obtained control to the North-South road and constructed a county road. An iron pin in a concrete monument was found at the corner.

December 5, 1980

Ronald J. Olson, Registered Land Surveyor, searched the area with a magnetic locater. An excavation was made with the cooperation of the County Engineer and an iron rod in concrete was found 4 feet below the surface. The distance to the Southeast Corner of Section 31 was measured electronically. The measurement agrees within 1 foot of the distance measured in 1952.

The concrete monument has been perpetuated as the corner for over 30 years and is accepted as marking the corner of the Public Land Survey.

For additional details, contact Zenk Engineering, Inc., Albert Lea, Minnesota.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 36, Township 104N Range 15W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-27-93 (DATE) found a NOTHING

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6-30-93 (DATE) placed a 5/8"ø x 16" IRON

SKETCH OF REFERENCE TIES

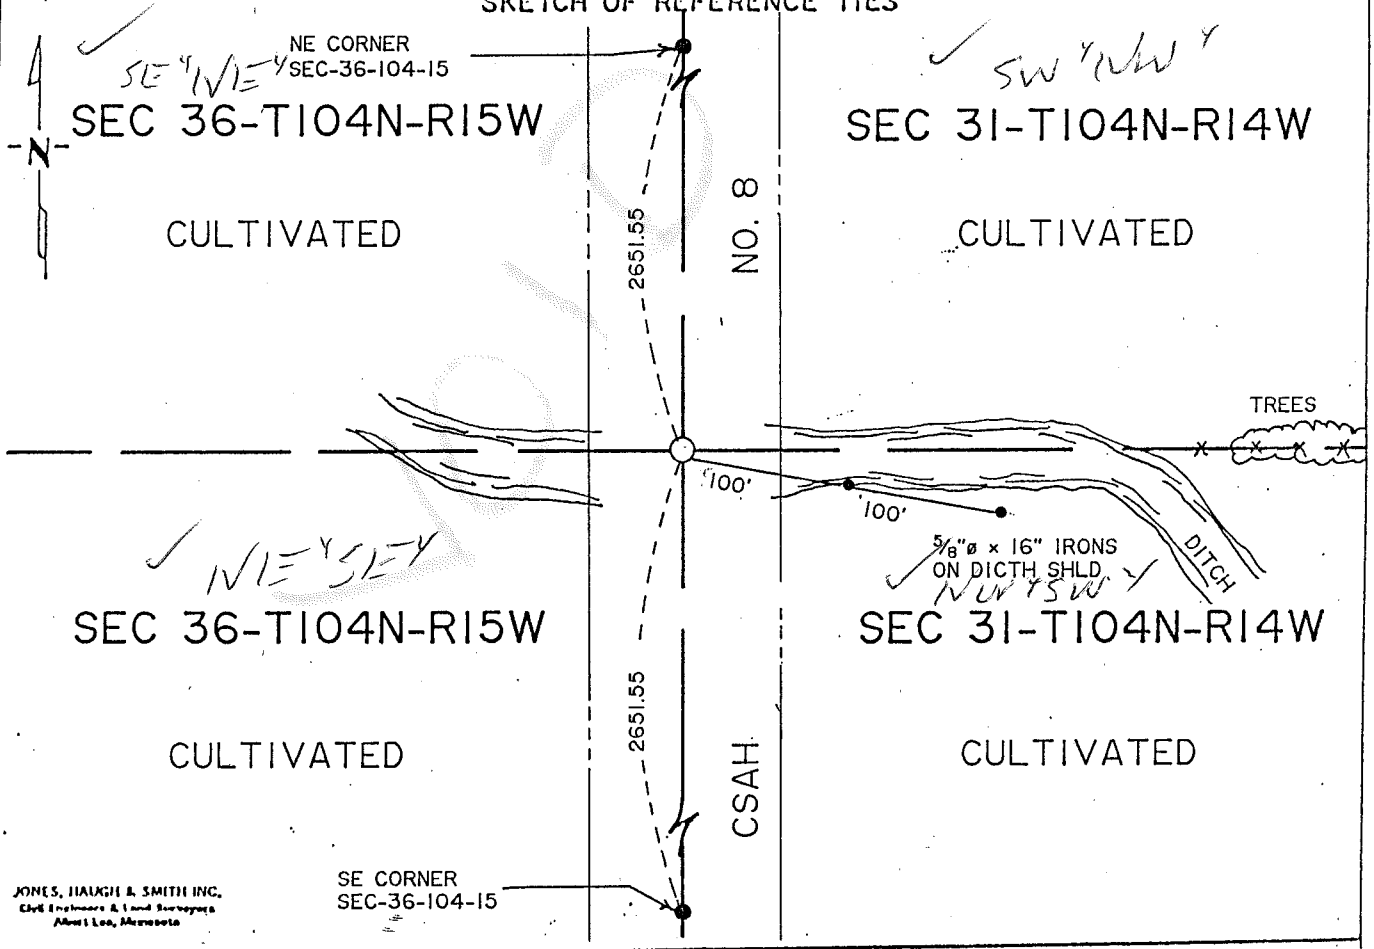

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-13-93

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 14 day of July A.D., 19 93

COUNTY RECORDER Amanda Enger

By Marlene Martin, Deputy

DOCUMENT NO. 422236

M.H.D. FORM NO. 2105 BOOK 80 PAGE 315 bk 80 Misc. pg. 315

STATEMENT OF EVIDENCE

E 1/4 corner Section 36-104-15

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Recorder's Office
Mower County Highway Department
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of a perpetuation of the original public land survey corner.

1993 Jones, Haugh & Smith Inc crew under the direction of John Schulte, RLS 13807, searched area and found no evidence of a perpetuation of the original corner. The original public land survey corner would have been destroyed by ditch construction. Therefore we set a 5/8" diameter x 16" iron on a straight line and at midpoint between the northeast corner and southeast corner of Section 36. Iron set was inline with line fence running east, as shown on 1945 County Highway Plans.

The monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 80 PAGE 316

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 36, Township 104N Range 15W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-27-93 (DATE) found a NOTHING Recvd 7-19-93

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6-30-93 (DATE) placed a 5/8"ø x 16" IRON

SKETCH OF REFERENCE TIES

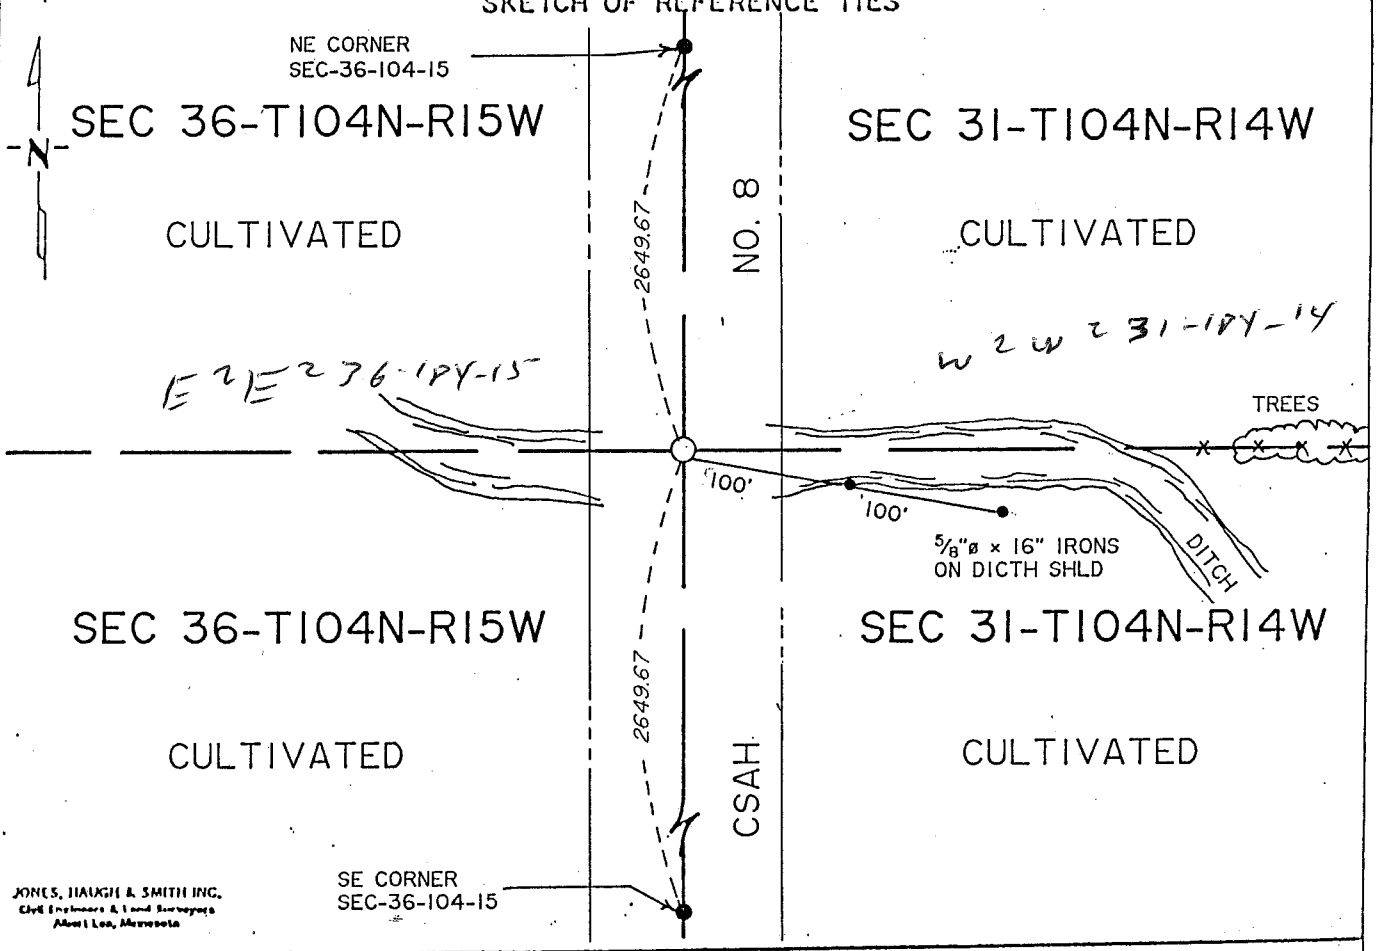

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-20-94

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 10:4 .M. on the 21 day of June A.D., 1994

COUNTY RECORDER Charles Enger

By Marlene Manton, Deputy

DOCUMENT NO. 430119

Book 83 Misc Pg 479

BOOK 83 PAGE 479

M.H.D. FORM NO. 2103

STATEMENT OF EVIDENCE

E 1/4 corner Section 36-104-15

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Recorder's Office
Mower County Highway Department
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of a perpetuation of the original public land survey corner.

1993 Jones, Haugh & Smith Inc crew under the direction of John Schulte, RLS 13807, searched area and found no evidence of a perpetuation of the original corner. The original public land survey corner would have been destroyed by ditch construction. Therefore we set a 5/8" diameter x 16" iron on a straight line and at midpoint between the northeast corner and southeast corner of Section 36. Iron set was inline with line fence running east, as shown on 1945 County Highway Plans.

The monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 83 PAGE 480

Revised

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 36, Township 104N Range 15W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-27-93 (DATE) found a NOTHING

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6-30-93 (DATE) placed a 5/8"ø x 16" IRON

SKETCH OF REFERENCE TIES

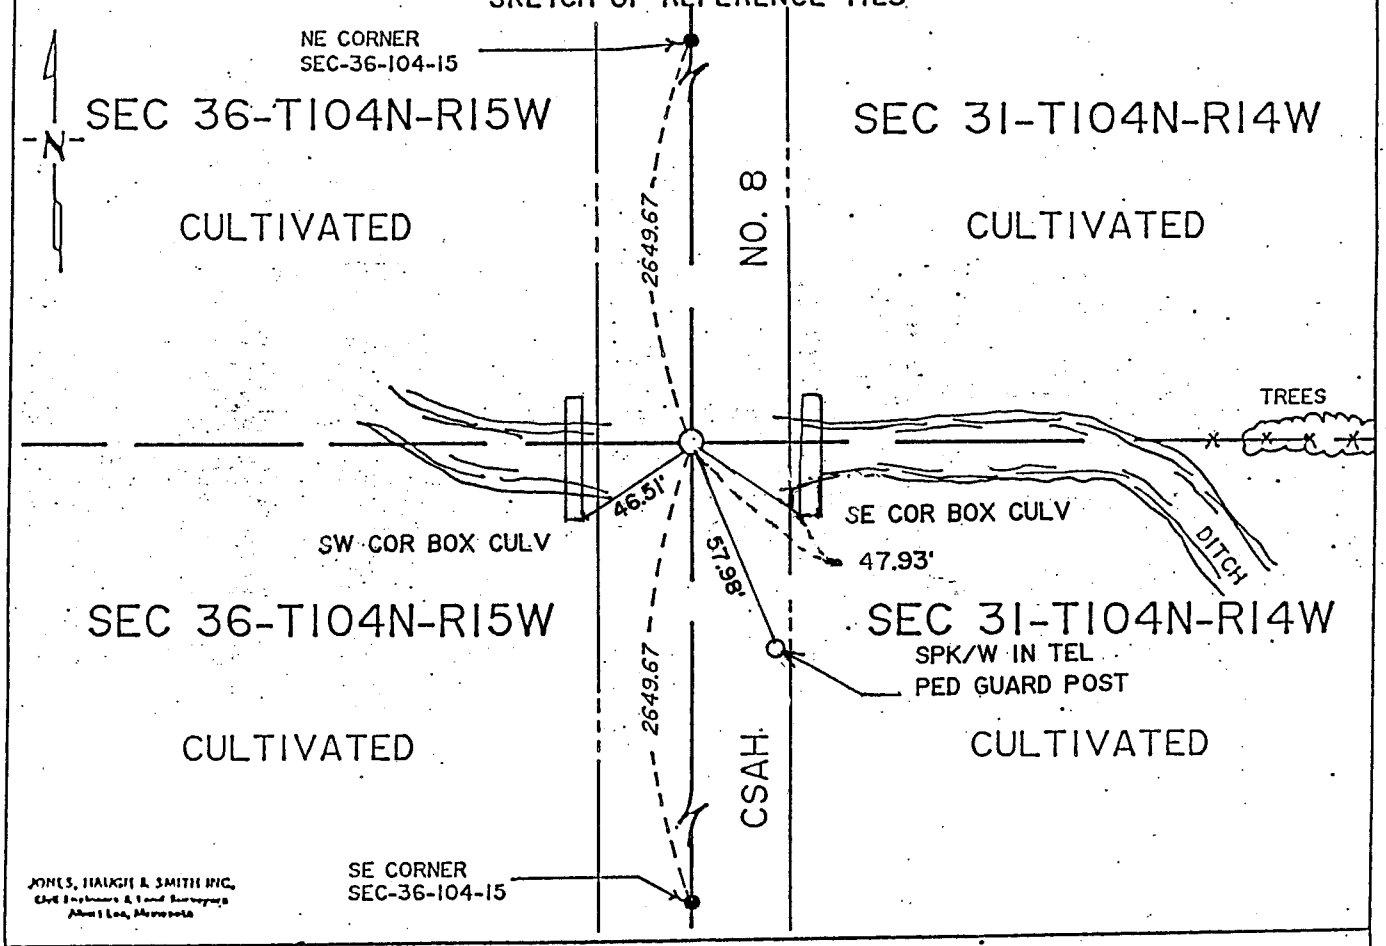

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ SIGNATURE _____ DATE

Registration No. _____

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

E 1/4 corner Section 36-104-15

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Recorder's Office
Mower County Highway Department
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of a perpetuation of the original public land survey corner.

1993 Jones, Haugh & Smith Inc crew under the direction of John Schulte, RLS 13807, searched area and found no evidence of a perpetuation of the original corner. The original public land survey corner would have been destroyed by ditch construction. Therefore we set a 5/8" diameter x 16" iron on a straight line and at midpoint between the northeast corner and southeast corner of Section 36. Iron set was inline with line fence running east, as shown on 1945 County Highway Plans.

The monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.