CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 32, Township 104N, Range 16W, 5 P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

On 9-7-90 found NOTHING

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

On 9-7-90 placed COUNTY CAP ON 1/2" PIPE

SKETCH OF REFERENCE TIES

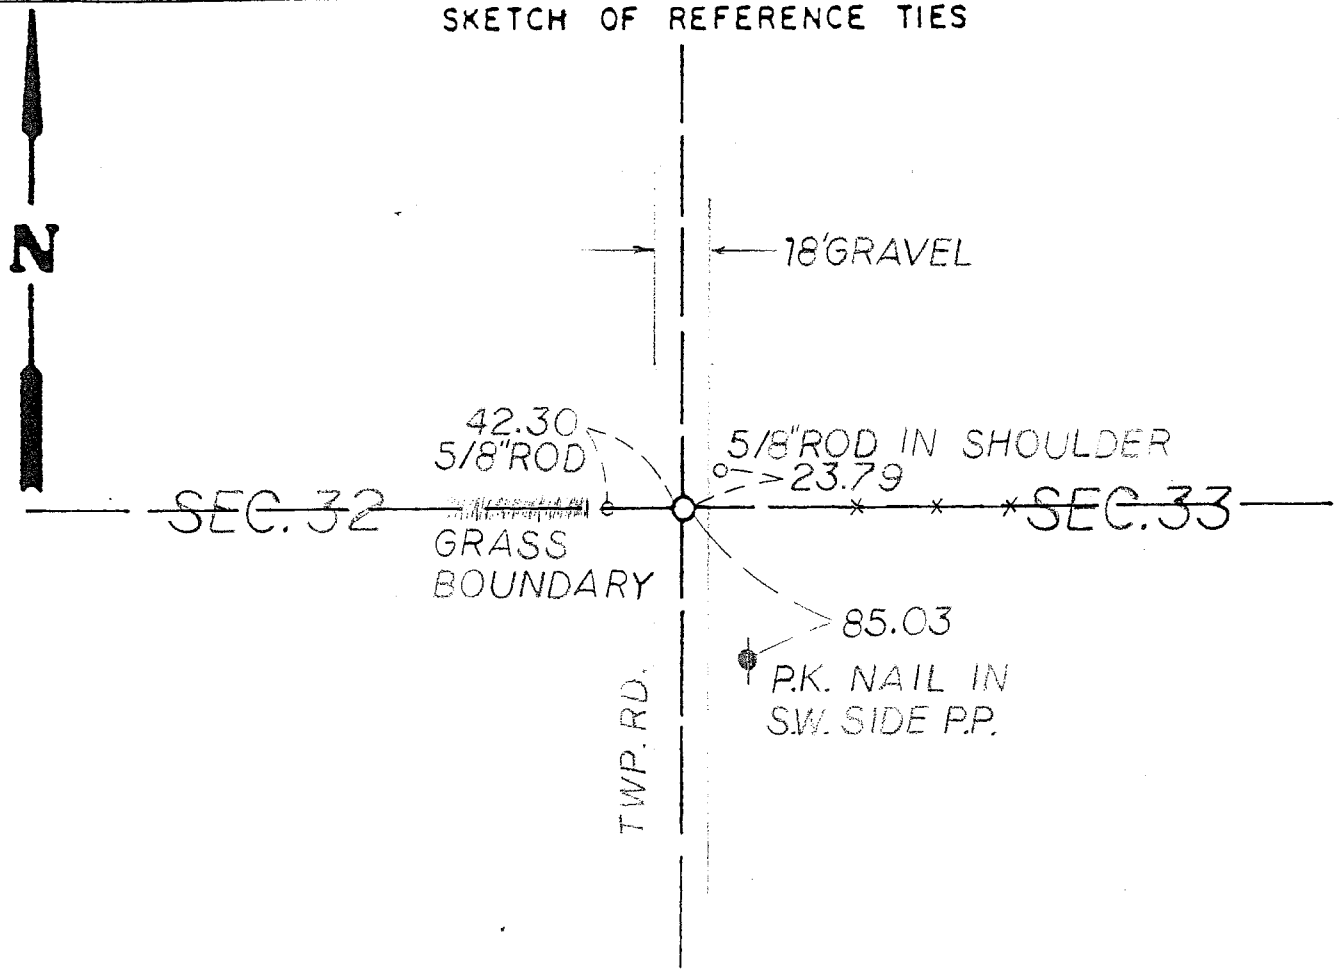

Statement of evidence relative to this corner location is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald J. Olson — Signature

12-26-90 — Date

Registration No. 11009

☒ Land Surveyor ☐ Prof Engineer

☐ County Surveyor ☐ County Engineer

Zenk·Read·Trygstad & ASSOCIATES, INC.

Engineers / Architects / Land Surveyors / Planners

Box 689, Albert Lea, MN 56007 507/373-0689

OFFICE OF THE COUNTY RECORDER

County of MOWER

I hereby certify that this document was filed in the County Recorders office at _____ .M. on the ____ day of _____ A.D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

STATEMENT OF EVIDENCE

East Quarter Corner Section 32, Township 104 North, Range 16 West, 5 P.M.

September,1853	J. Fitzpatrick, Deputy Surveyor, set quarter section post, deposited a stone, made mound of earth and sod with trench and pits as per instructions.
June 30, 1879	Clausen Field Notes show a post in place which was used to subdivide Section 32.
September 7, 1990	Zenk Read Trygstad & Associates, Inc. excavated a trench 3.5 feet deep from 4 feet east to 3.5 feet west of center line and 8 feet north to 4 feet south of fence line east. Two pieces of sandstone with a smooth round hole apparent near the common edges of the stones was found. The stones were scattered and no definite location could be determined. A Mower County cap and 1/2" iron pipe was set on line with center line and in line with the fence east. The occupation lines are accepted as the location of the original Public Land survey corner.