Index No. NP

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 16, Township 104N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 9-25-89 (DATE) found a 1/2 Ø" IRON CAST IN 6" ROUND CONC. MONUMENT.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 9-25-89 (DATE) placed a 5/8" Ø IRON CAPPED RLS 13807 OVER CONC. MONUMENT ON ROAD SURFACE.

SKETCH OF REFERENCE TIES

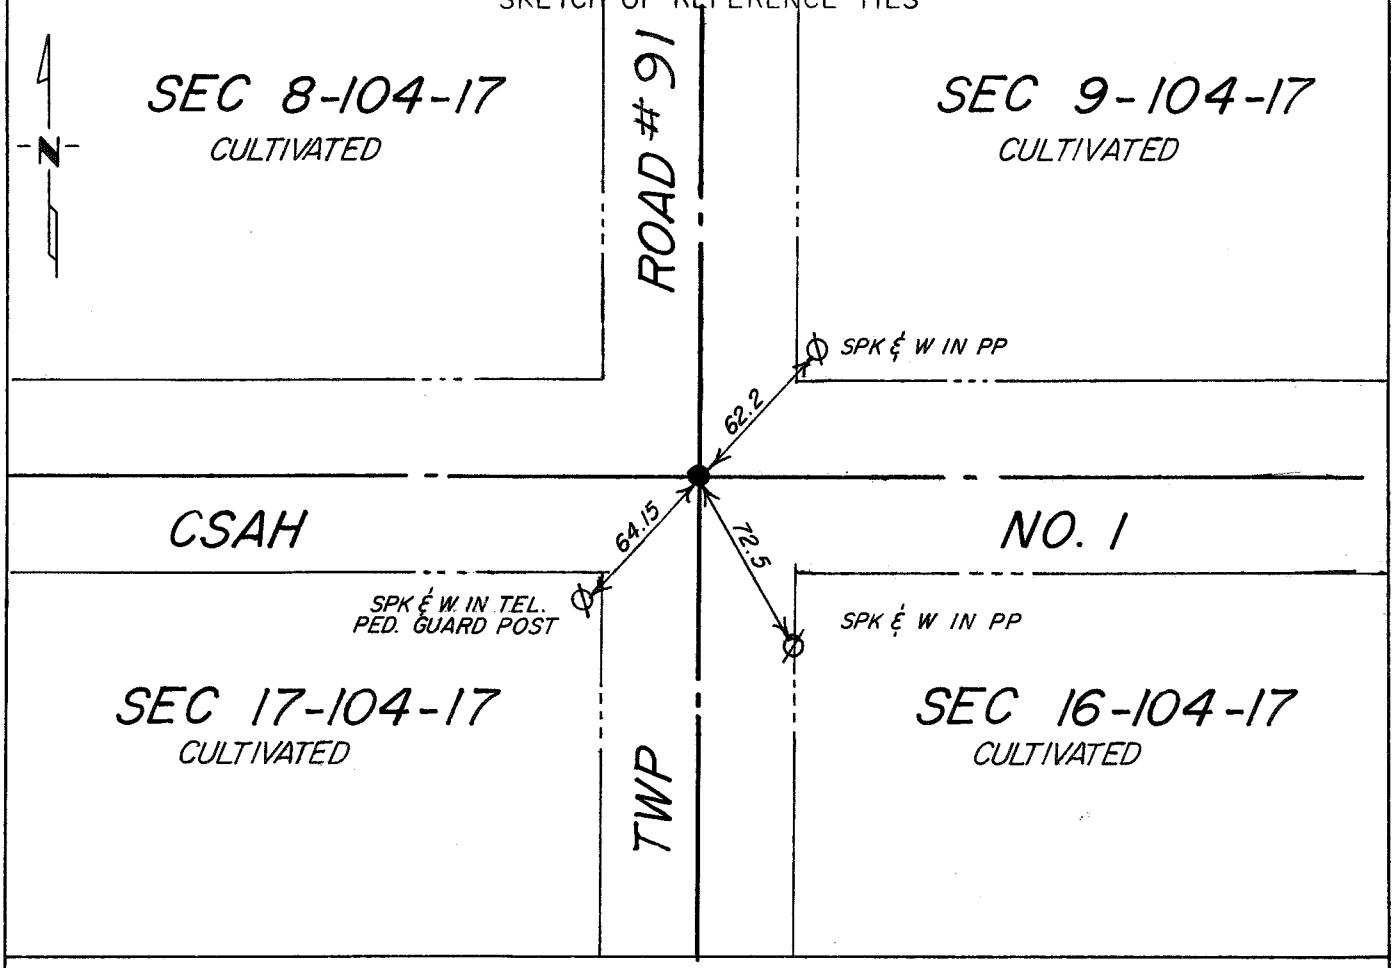

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] SIGNATURE 12-21-89 DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW 1/4 corner Section 16-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the United States General Land Office in 1854. The government notes show this corner was marked with a charred stake together with a mound of earth and trench.

The following were contacted for section corner information:

Mower County Highway Department
Mower County Records Office

1930+ Mower County grading plan shows a concrete monument inplace and ties were taken during road project.

1989 Jones, Haugh & Smith Inc. personnel together with the Mower County backhoe operator dug a 6'x 6' x 2' deep hole and uncovered a 1/2" diameter iron cast in a 6" diameter concrete monument 2' below the road surface. Placed a 5/8" diameter x 16" iron capped RLS 13807 over concrete monument on road surface.

The monument found fits occupation and road centerlines within the section and agrees with past records from the Mower County Highway Department.

For electronic survey data and analysis, contact firm of Jones, Haugh & Smith.

Index No. P132 "S"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 16, Township 104W, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 9-25-89 (DATE) found a stone on North side of 1"Ø pipe 3.0' deep on ℄ N-S road in line with fence west 3.0' North of fence East.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 9-25-89 (DATE) placed a 5/8"Ø iron capped 13807 over monument found.

SKETCH OF REFERENCE TIES

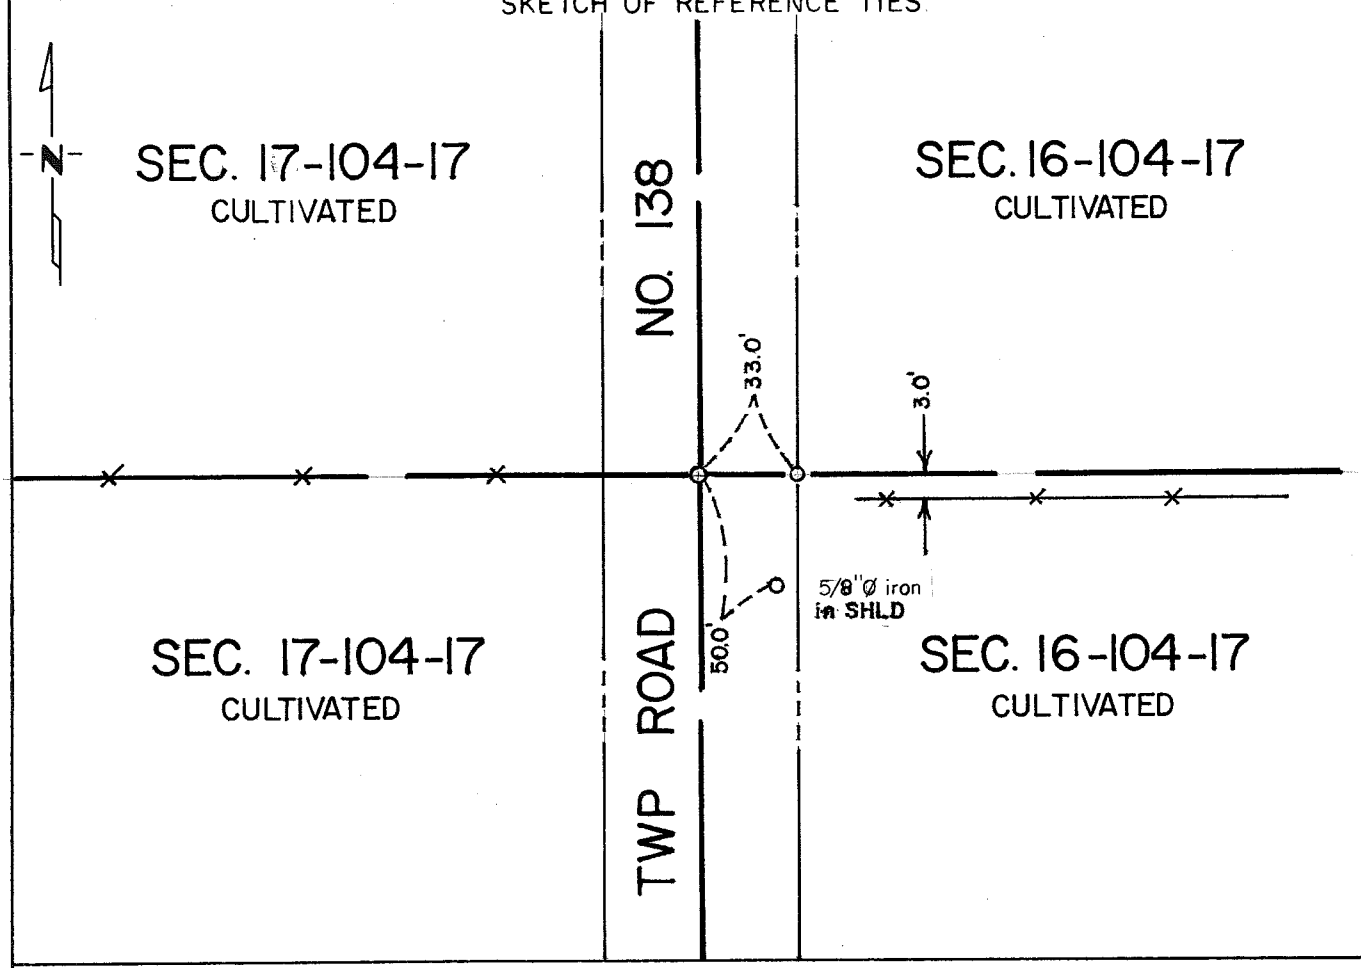

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 9-17-90 DATE

Registration No. 13907

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Section 16-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Survey Office in 1853. The government notes show this corner was marked with a wood post, a stone and a trench with a mound of earth.

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorder's Office

1990 Jones, Haugh & Smith crew dug with the Mower County backhoe and found a stone on the north side of 1" diameter pipe 3.0 feet below road surface on centerline of north-south road in line with fence west and 3.0 feet north of fence east. Placed a 5/8" diameter iron capped 13807 over monument found.

Corner found fits road centerlines and past record and is accepted as best evidence and perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. N-P

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 16, Township 104N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 9-25-89 (DATE) found a LARGE FIELD STONE ON THE NORTH SIDE OF 1" DIA. PIPE 3' BELOW ROAD SURFACE.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 9-25-89 (DATE) placed a 5/8" Ø IRON CAPPED RLS 13807 OVER PIPE.

SKETCH OF REFERENCE TIES

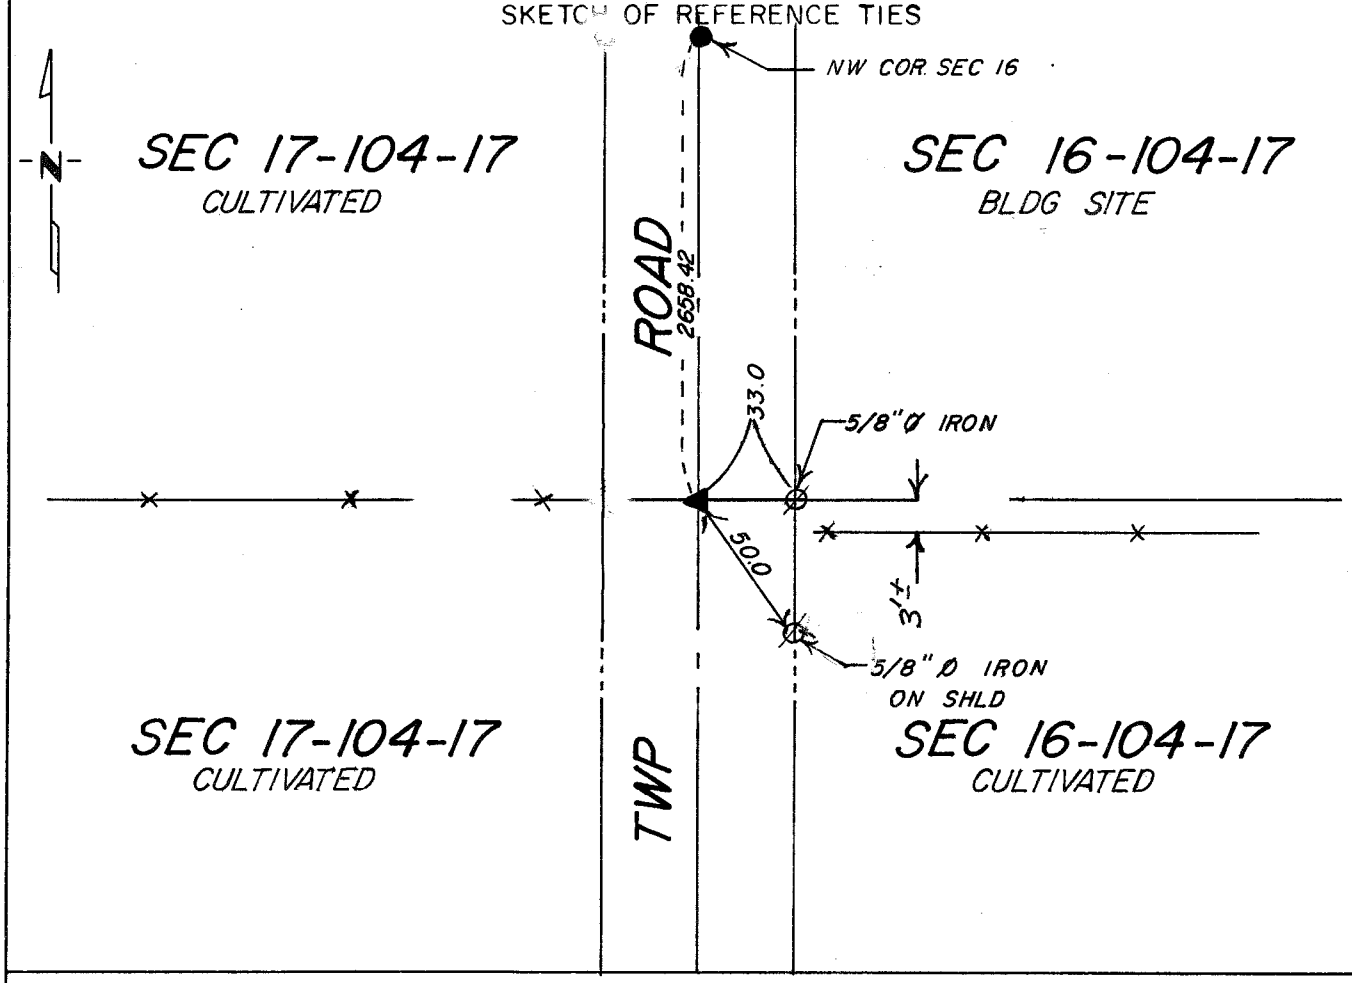

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] 12-21-89
SIGNATURE DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Section 16-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the United States General Land Office in 1854. The government notes show a wood post was set and a field stone was deposited with a mound of earth and trenches.

The following were contacted for section corner information:

Mower County Highway Department
Mower County Records Office

No recent information was obtained to support evidence of a perpetuation of the original public land survey corner.

1989 Jones, Haugh & Smith Inc. crew together with the Mower County backhoe operator dug a 6'x 12'x 3' deep hole on the centerline of N-S road in line with fence west and uncovered a 1" diameter pipe on the south side of a large field stone 3' below road surface in virgin soil. Placed a 5/8" diameter x 16" iron rebar capped RLS 13807 over 1" diameter pipe on road surface.

The monument found fits occupation and road centerlines within the section and is accepted as the original public land survey corner or a perpetuation thereof.

"P" p60, "B" p132

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 16, Township 104W, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 9-25-89 (DATE) found a 1/2"Ø iron in 6" round concrete monument 3.0' below road surface on ℄℄ of N-S-E-W roads.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 9-25-89 (DATE) placed a 5/8"Ø iron capped 13807 over monument found.

SKETCH OF REFERENCE TIES

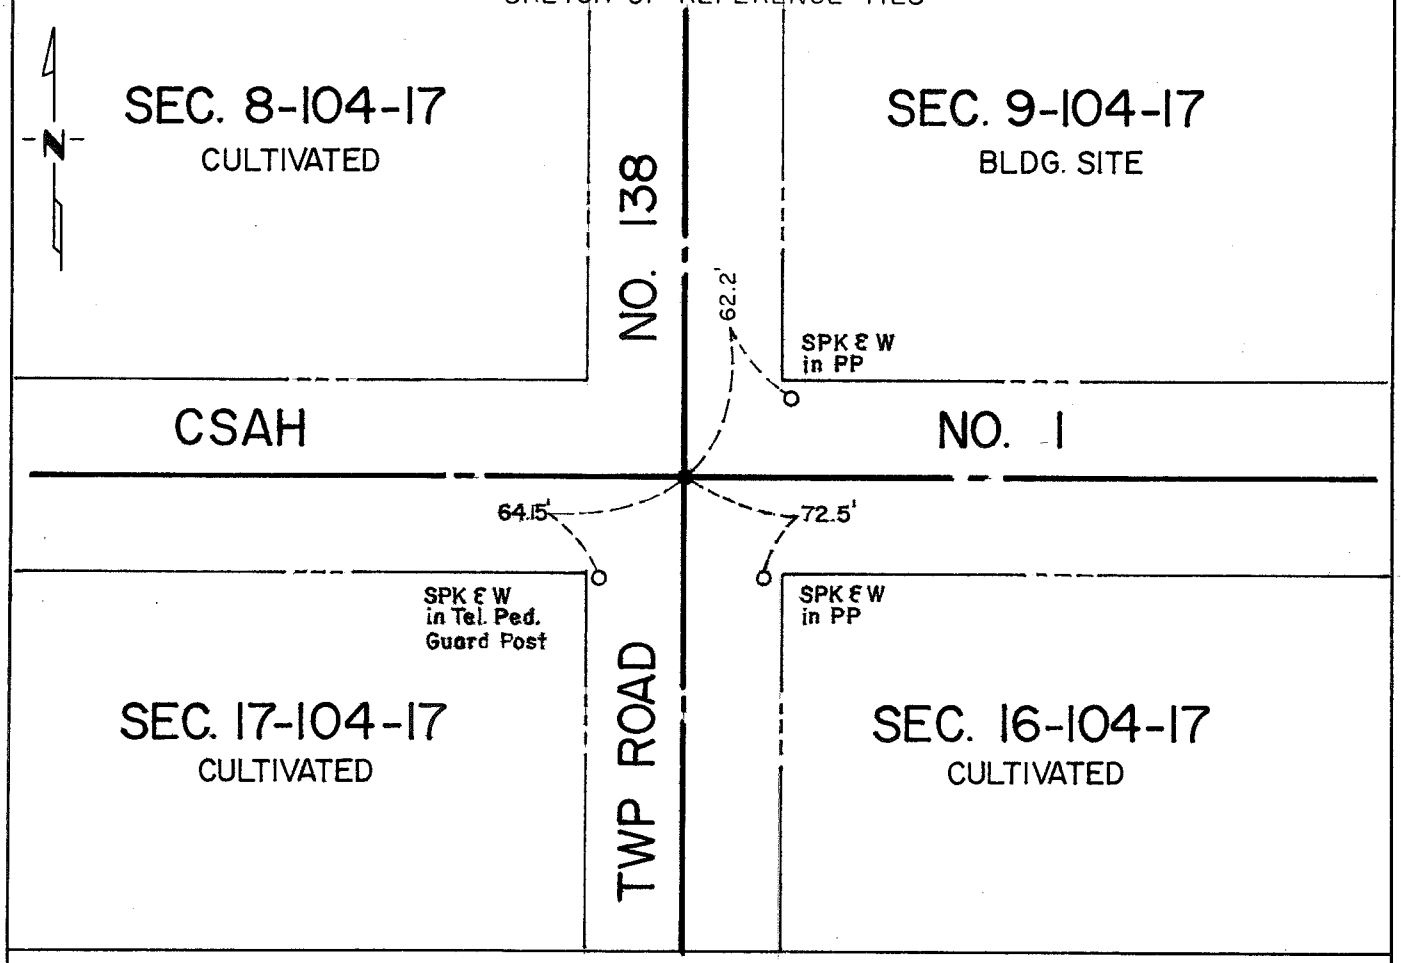

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ 9-17-90
SIGNATURE DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Section 16-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Survey Office in 1853. The government notes show this corner was marked with a wood post, a stone and a trench with a mound of earth.

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorder's Office

1956 Record Book 'A' in the County Engineer's Office shows a concrete monument inplace and the following ties were taken:

PP	SE	72.2 ft
PP	SW	63.8 ft

1990 Jones, Haugh & Smith crew with the Mower County backhoe dug on centerline centerline of north-south-east-west roads and found a 1/2" diameter iron in 6" diameter round concrete monument 3.0 feet below road surface. Reset capped 5/8" diameter iron at road surface over monument found.

Corner found fits road centerlines and is accepted as best evidence and perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 16, Township 104N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 9-25-90 (DATE) found a 1/2"Ø iron in concrete 2.5'- deep on ℄ E-W road in line with fence North. and 2' East of 3/4"Ø x 12" found at road surface.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain) (capped 13807)

☐ On 9-25-90 (DATE) placed a 5/8"Ø iron over concrete monument found.

SKETCH OF REFERENCE TIES

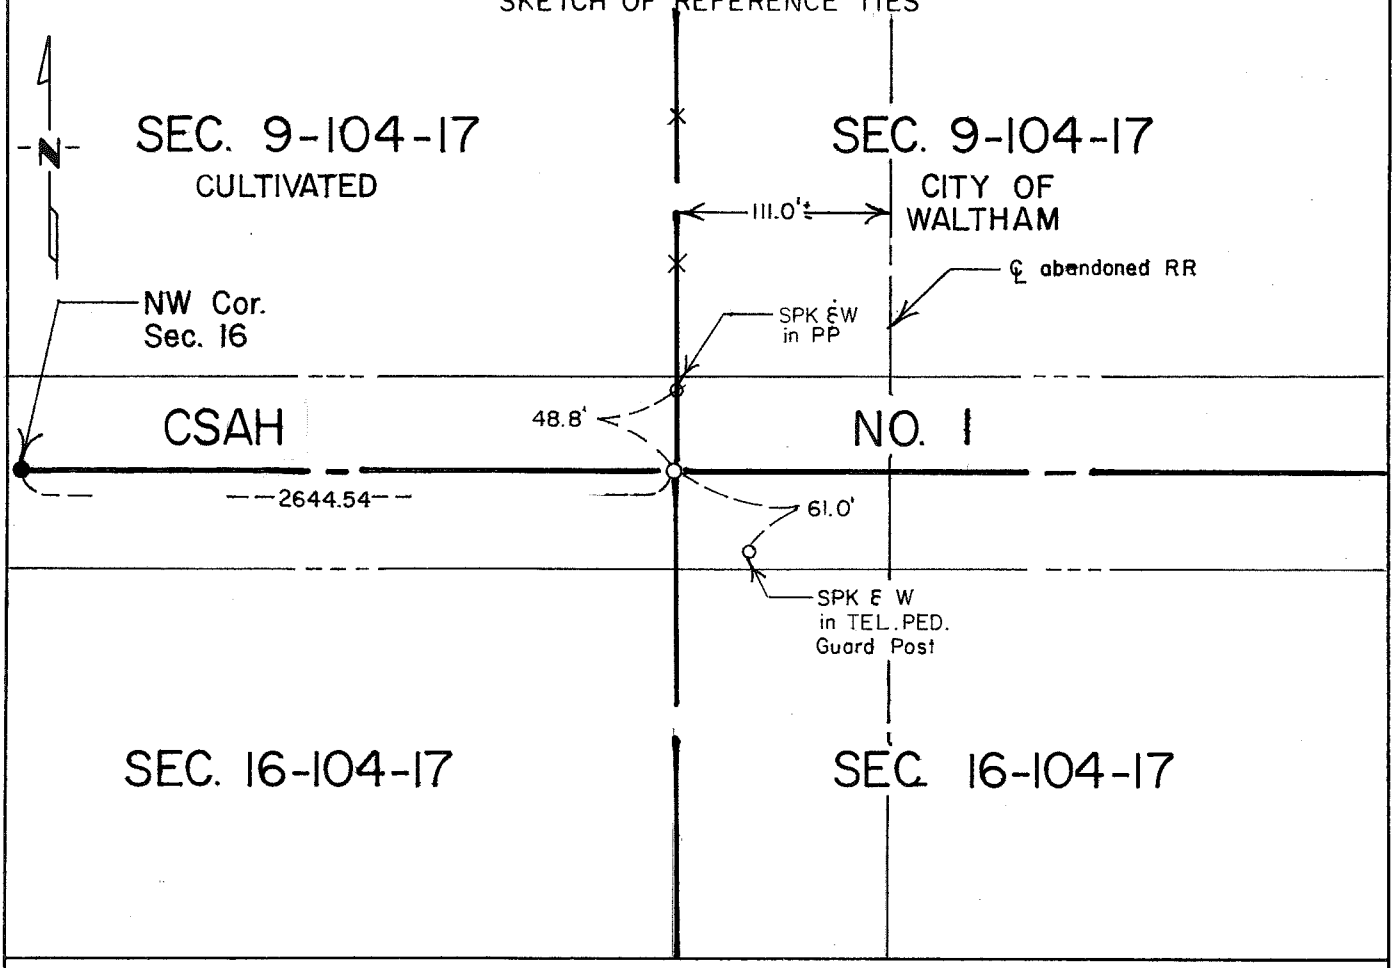

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-18-90

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Section 16-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Survey Office in 1853. The government notes show this corner was marked with a wood post, a stone and a trench with a mound of earth.

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorder's Office

1956 Record Book 'A' in the County Engineer's Office shows a concrete monument inplace 110.0 feet west of the centerline railroad tracks.

1990 Jones, Haugh & Smith crew found a 3/4" diameter x 12" iron on road surface. Dug with Mower County backhoe and found 1/2" diameter iron in concrete 2.5 feet more or less deep and 2.0 feet east of iron found on road surface.

Corner found fits occupation and road centerlines with the section and agrees with 1956 records. Concrete monument is accepted as best evidence and perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

"D" p60, "C" p132

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 16, Township 104N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 9-25-89 (DATE) found a 1/2" Ø IRON CAST IN 6" DIA. CONC. MONUMENT.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 9-25-89 (DATE) placed a 5/8" Ø IRON CAPPED RLS 13807 OVER CONC. MONUMENT ON ROAD SURFACE.

SKETCH OF REFERENCE TIES

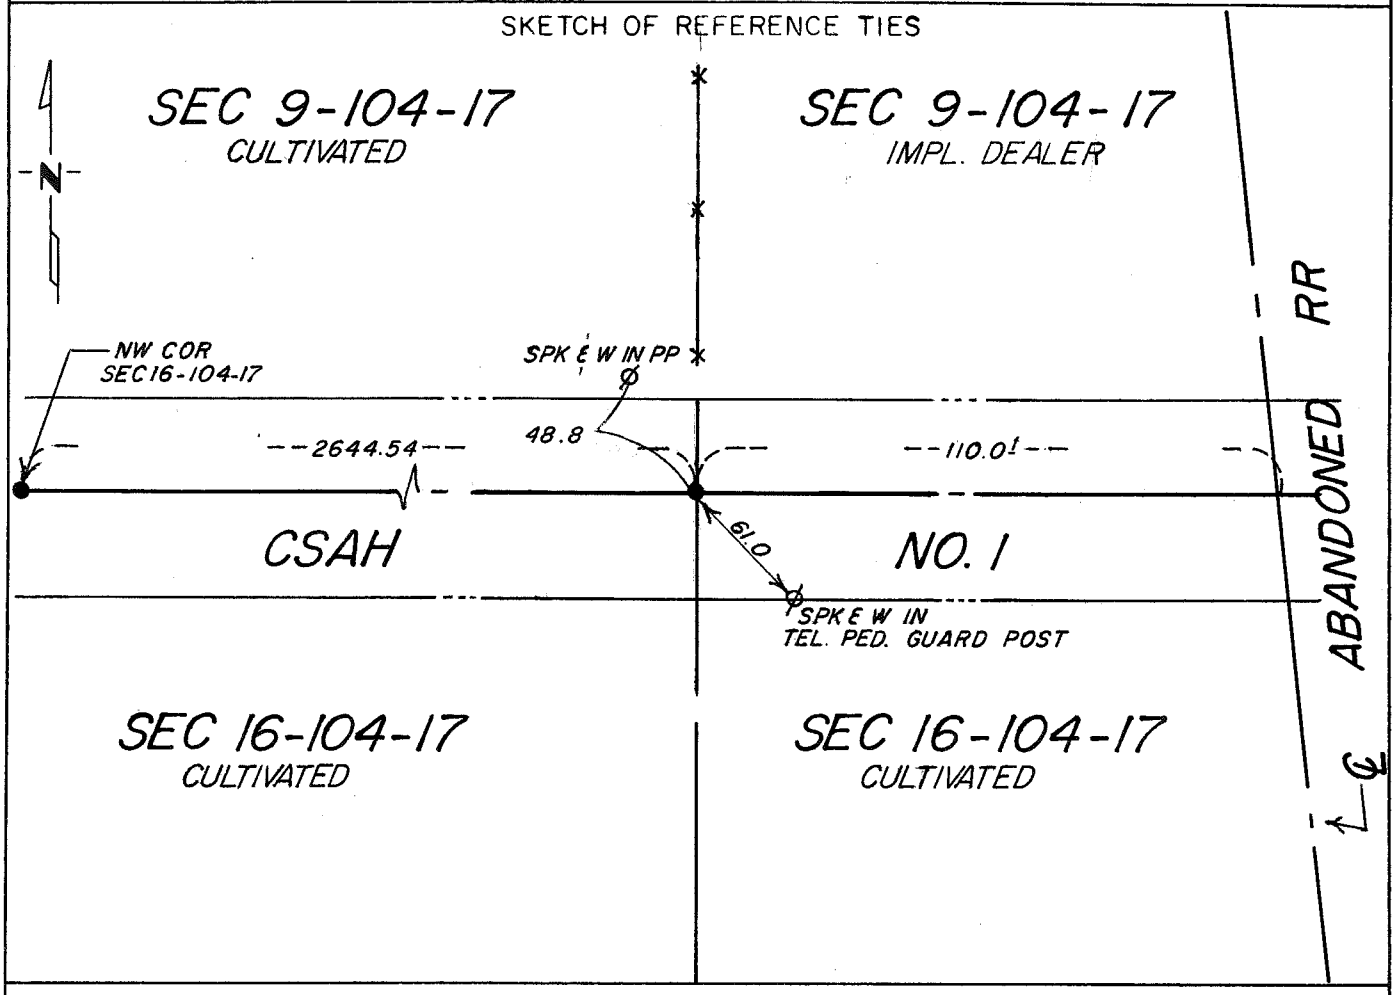

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] 12-21-89
SIGNATURE DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Section 16-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the United States General Land Office in 1854. The government notes show a wood post was set and a field stone was deposited with a mound of earth and trenches.

The following were contacted for section corner information:

Mower County Highway Department
Mower County Records Office

1930+ Mower County grading plan shows a concrete monument inplace and ties taken during construction project.

1989 Jones, Haugh & Smith Inc. crew together with the Mower County backhoe operator dug a 6'x6'x3' deep hole on the centerline of E-W road in line with fence west and uncovered a 1/2 diameter iron cast in a 6" diameter concrete monument 2.5' below road surface. Placed a 5/8" diameter x 16" iron rebar capped RLS 13807 over concrete monument on road surface.

The monument found fits occupation and road centerlines within the section and is accepted as the original public land survey corner or a perpetuation thereof.

For electronic survey data and analysis, contact firm of Jones, Haugh & Smith.

Index No. "I" P. 60 "P" P132

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 16, Township 104N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 9-25-89 (DATE) found a 1"Ø iron flush with road surface 8.1' east of T.H. No. 56 ℄.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

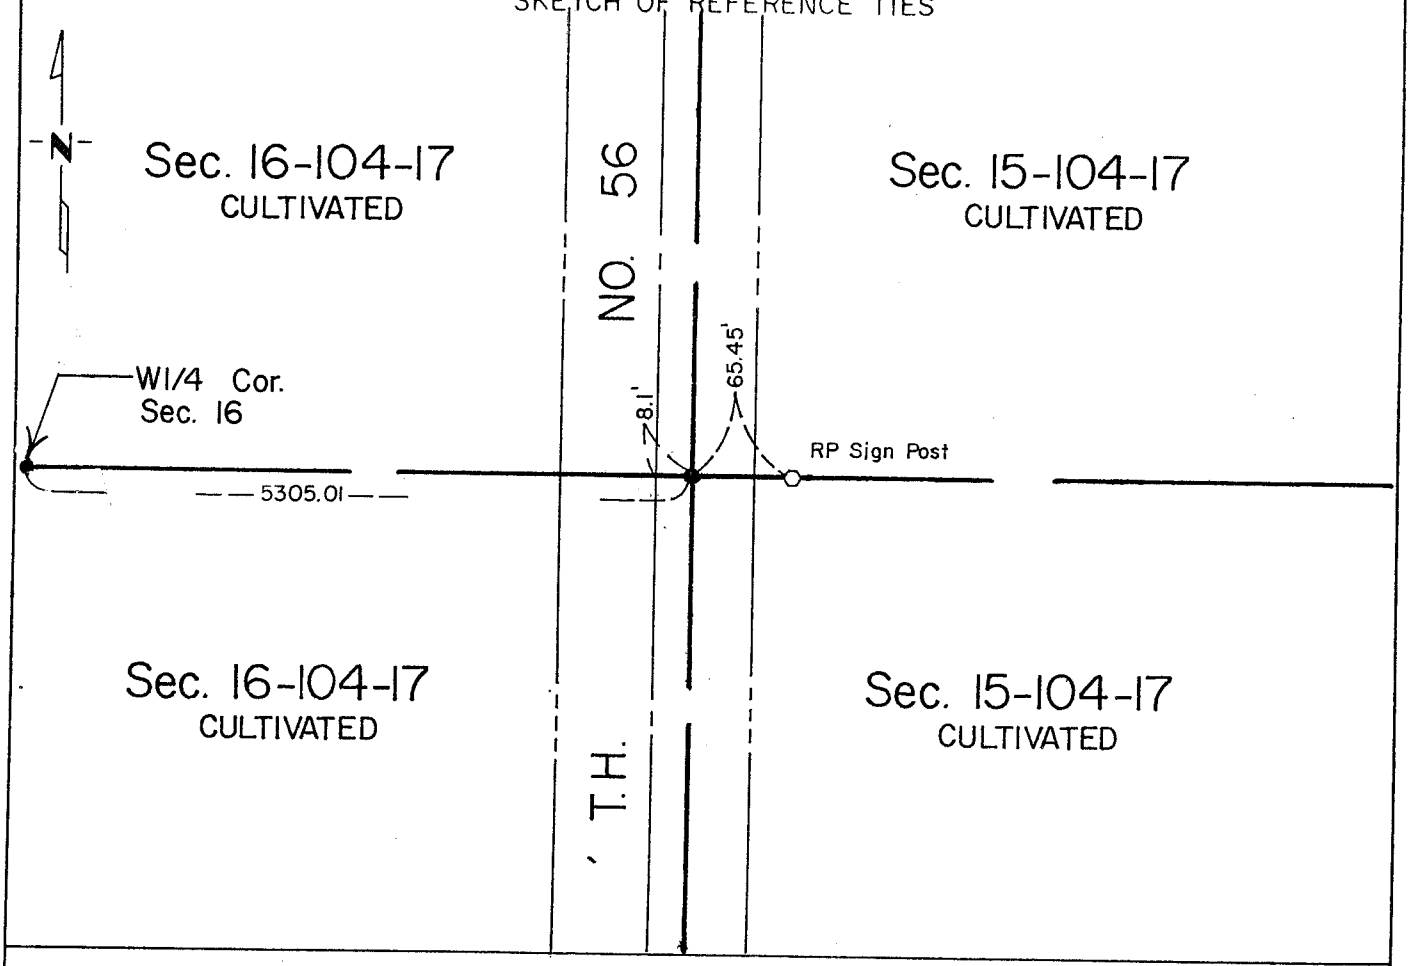

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-18-90

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

E 1/4 corner Section 16-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Survey Office in 1853. The government notes show this corner was marked with a wood post and a stone with a trench and a mound of earth.

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorder's Office

1940 Mower County Grading Plan shows a 1" diameter iron at this location.

1990 Jones, Haugh & Smith crew found a 1" diameter iron flush with the road surface 8.1 feet east of the centerline of Trunk Highway No. 56.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.