CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 31, Township 104, Range 17, 5th P.M. STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☐ On 5-16-90 found a 20 penny spike.

☐ left monument as found, ☐ lowered monument, ☒ removed monument (expl.)

☐ On 6-22-90 placed a Standard County Monument.

SKETCH OF REFERENCE TIES

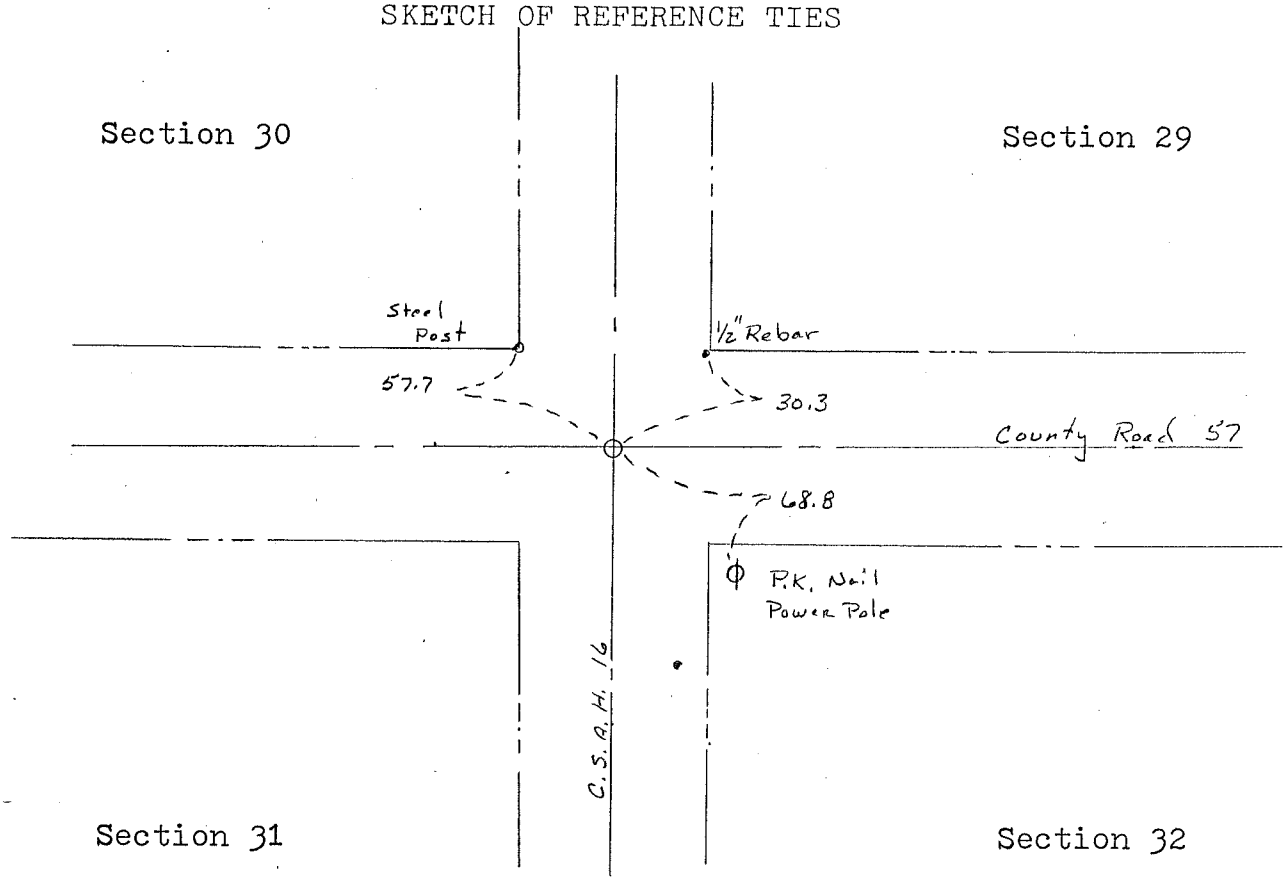

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Raymond J. Tauke — Signature
6-25-90 — Date

Registration No. 15471
☒ Land Surveyor, ☐ Prof. Engineer
☐ County Surveyor, ☐ County Engr.

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____.M. on the ___ day of _____ A.D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

STATEMENT OF EVIDENCE:

NORTHEAST CORNER SECTION 31 - T104N - R17W

1853 - John Fitzpatrick, Deputy Surveyor, set a corner section post deposited a stone, made mound of earth and sod with trench and pits during the Original Public Land Survey.

1931 - Mower County Highway Department notes show a large pointed granite rock.

1970 - Mower County Highway Department notes show an inplaced concrete monument below a bit. surface.

May 1990 - Tucker Land Surveying excavated this location and found a 20 penny spike. Excavated 3 feet deep x 6 feet North-South x 4 feet East-West, found nothing. Replaced spike with a standard County Monument.

The above corner agrees with a electronic survey made of monuments and occupation lines in the area and is accepted as a perpetuation of the public land survey corner.

For details of the analysis and electric survey data contact: Tucker Land Surveying, Dexter, Minnesota 55926.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 32, Township 104N Range R17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 1980 (DATE) found a concrete monument with 1/2"ø iron pin

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 9-22-99 (DATE) placed a cast iron monument over 5/8"ø at road surface

SKETCH OF REFERENCE TIES

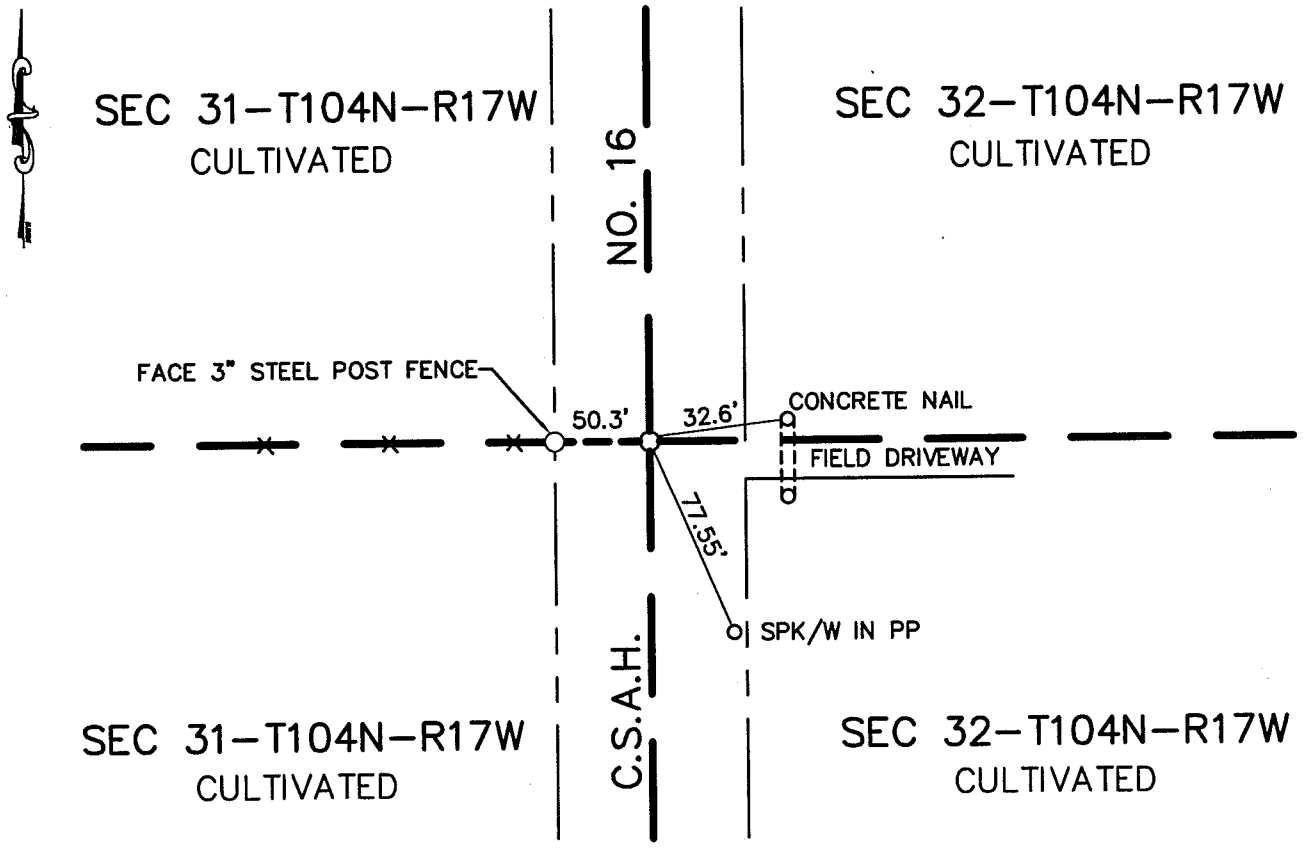

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 10-22-99

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

W 1/4 Cor Sec 32-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1980 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, uncovered concrete monument with 1/2" iron pin, on the centerline of C.S.A.H. NO. 16 and in line with line fence west. Set capped 5/8" over monument found - cap NO. 13807.

1999 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, uncovered capped 13807 5/8" iron .60' below road surface on the centerline of C.S.A.H. NO. 16 and in line with line fence west. Removed cap and set cast iron monument over 5/8" at road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 32, Township 104, Range 17, 5th P.M. STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☐ On 5-16-90 found a 1/2" Rebar.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (expl.)

☐ On _____ placed a _____

SKETCH OF REFERENCE TIES

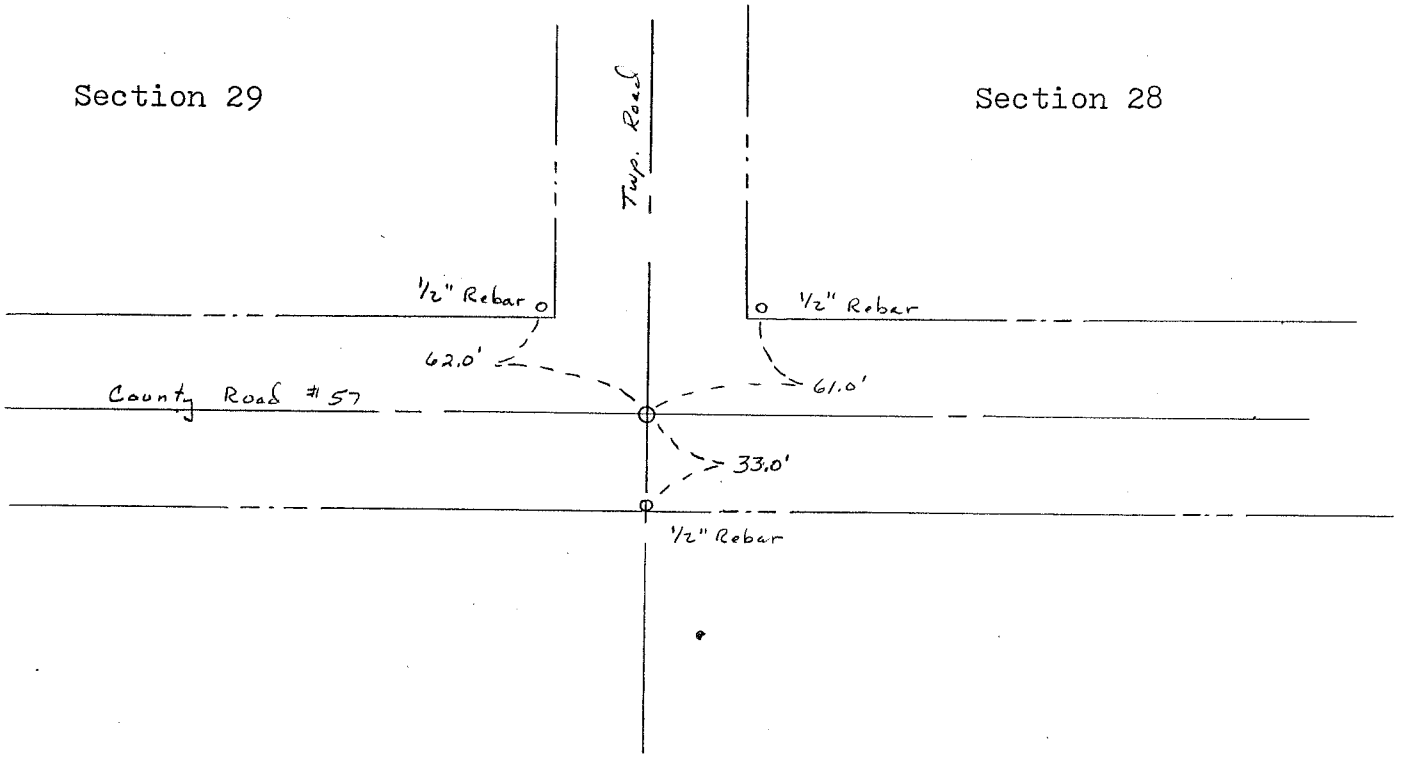

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Raymond M Tucker — Signature

6-25-90 — Date

Registration No. 15471

☒ Land Surveyor, ☐ Prof. Engineer

☐ County Surveyor, ☐ County Engr.

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____.M. on the ___ day of _____ A.D., 19____.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

STATEMENT OF EVIDENCE:

NORTHEAST CORNER SECTION 32 - T104N - R17W

1853 - John Fitzpatrick, Deputy Surveyor, set a corner section post during the Original Public Land Survey.

1970 - Mower County Highway Department notes show reference points to corner and an inplaced concrete monument.

May 1990 - Tucker Land Surveying excavated this location and found a 1/2" Rebar. Continued to excavate to 5 feet deep and found nothing. Accepted Rebar as corner.

The above corner agrees with a electronic survey made of monuments and occupation lines in the area and is accepted as a perpetuation of the public land survey corner.

For details of the analysis and electronic survey data contact: Tucker Land SUrveying, Dexter, Minnesota 55926.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 32, Township 104, Range 17, 5th P.M. STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☐ On 5-16-90 found a Rebar with Cap No. 13807.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (expl.)

☐ On _____ placed a _____

SKETCH OF REFERENCE TIES

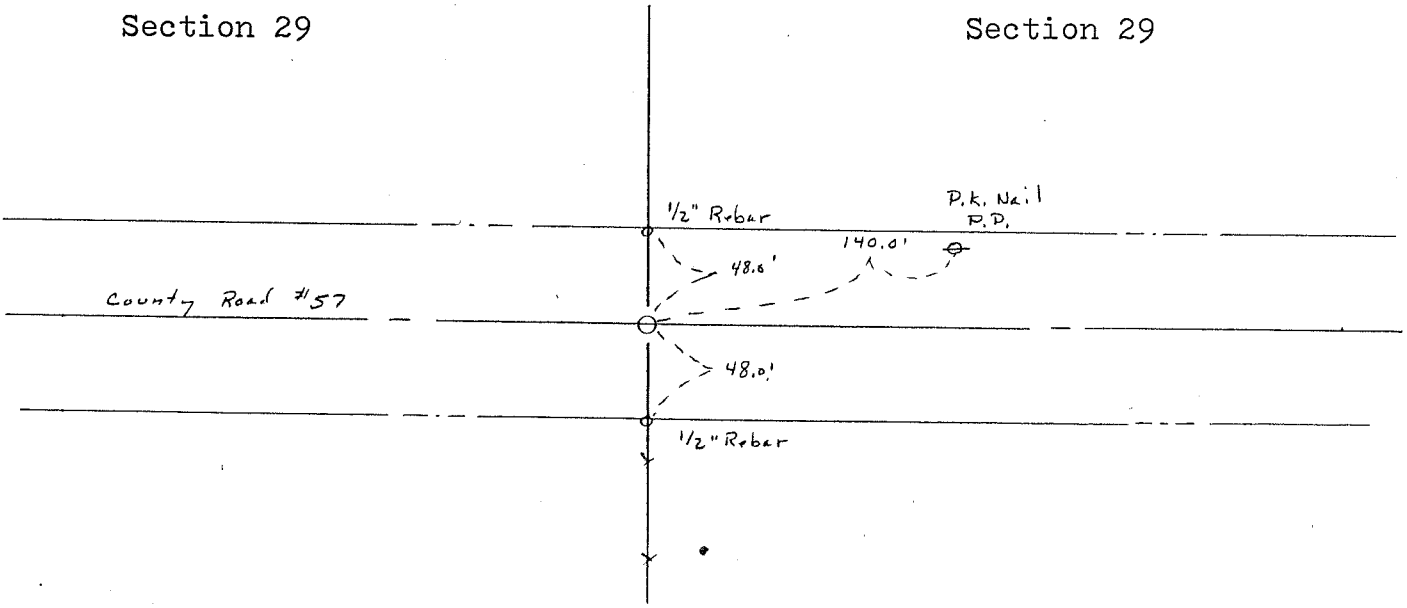

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Raymond R. Tubbs — Signature
6-25-90 — Date

Registration No. 15471
☒ Land Surveyor, ☐ Prof. Engineer
☐ County Surveyor, ☐ County Engr.

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____.M. on the ___ day of _____ A.D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

STATEMENT OF EVIDENCE:

NORTH QUARTER CORNER SECTION 32 - T104N - R17W

1853 - John Fitzpatrick, Deputy Surveyor, set a quarter section post deposited a stone, made mound of earth and sod with trench and pits during the Original Public Land Survey.

1970 - Mower County Highway Department notes show an inplaced concrete monument during County Proj. No. 7001.

May 1990 - Tucker Land Surveying excavated this location and found a rebar with Cap No. 13807. Accepted as corner.

The above corner agrees with a electronic survey made of monuments and occupation lines in the area and is accepted as a perpetuation of the public land survey corner.

For details of the analysis and electric survey data contact: Tucker Land Surveying, Dexter, Minnesota 55926.

NW Cor E½ NE¼ Sec. 32

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Point of Intersection Corner of Section 32, Township 104, Range 17, 5th P.M. 39+71 STATE OF MINNESOTA, County of Mower

At the corner location shown on the sketch:

☐ On 5-16-90 found a 3/4" Rebar


☒ left monument as found, ☐ lowered monument, ☐ removed monument (expl.)

☐ On _____ placed a _____

SKETCH OF REFERENCE TIES

Section 29

Note: P.I. Station 39+71

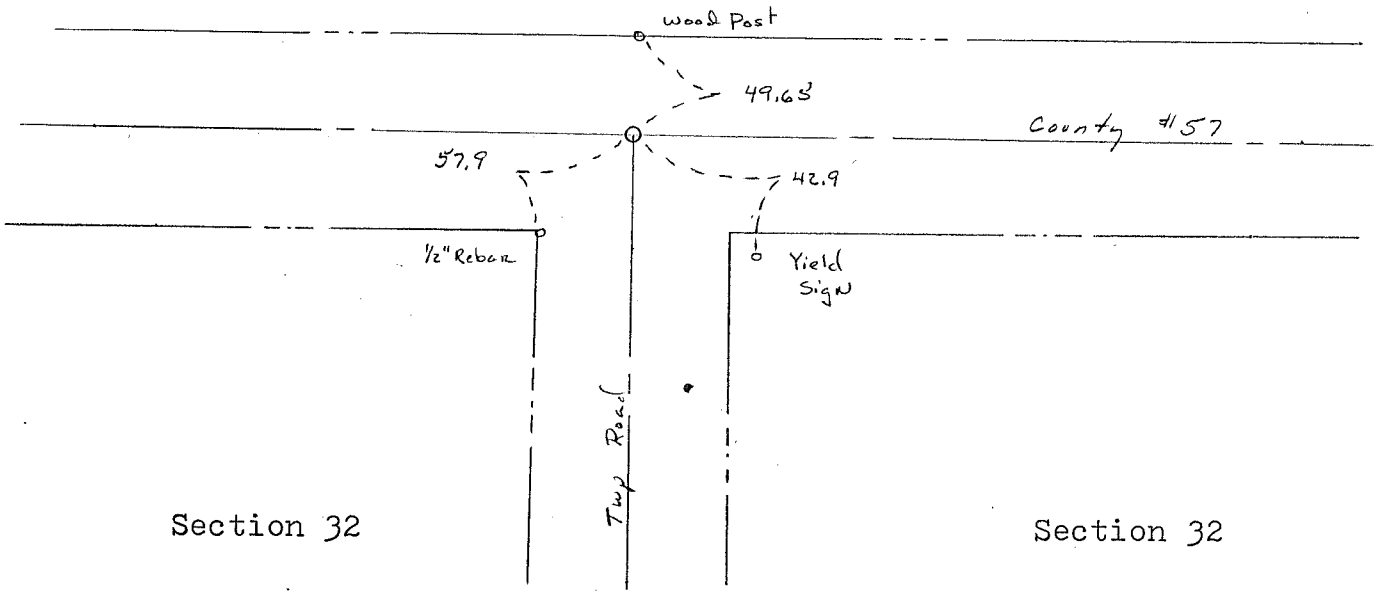

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Raymond K Tuck — Signature
6-25-90 — Date

Registration No. 15471
☒ Land Surveyor, ☐ Prof. Engineer
☐ County Surveyor, ☐ County Engr.

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____.M. on the ___ day of _____ A.D., 19____.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 32, Township 104N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 4-2-90 (DATE) found a 1/2"Ø iron cast in 6" clay tile surrounded by 3 bricks 3.0' below road surface.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 4-2-90 (DATE) placed a cast iron monument over 6" clay tile.

SKETCH OF REFERENCE TIES

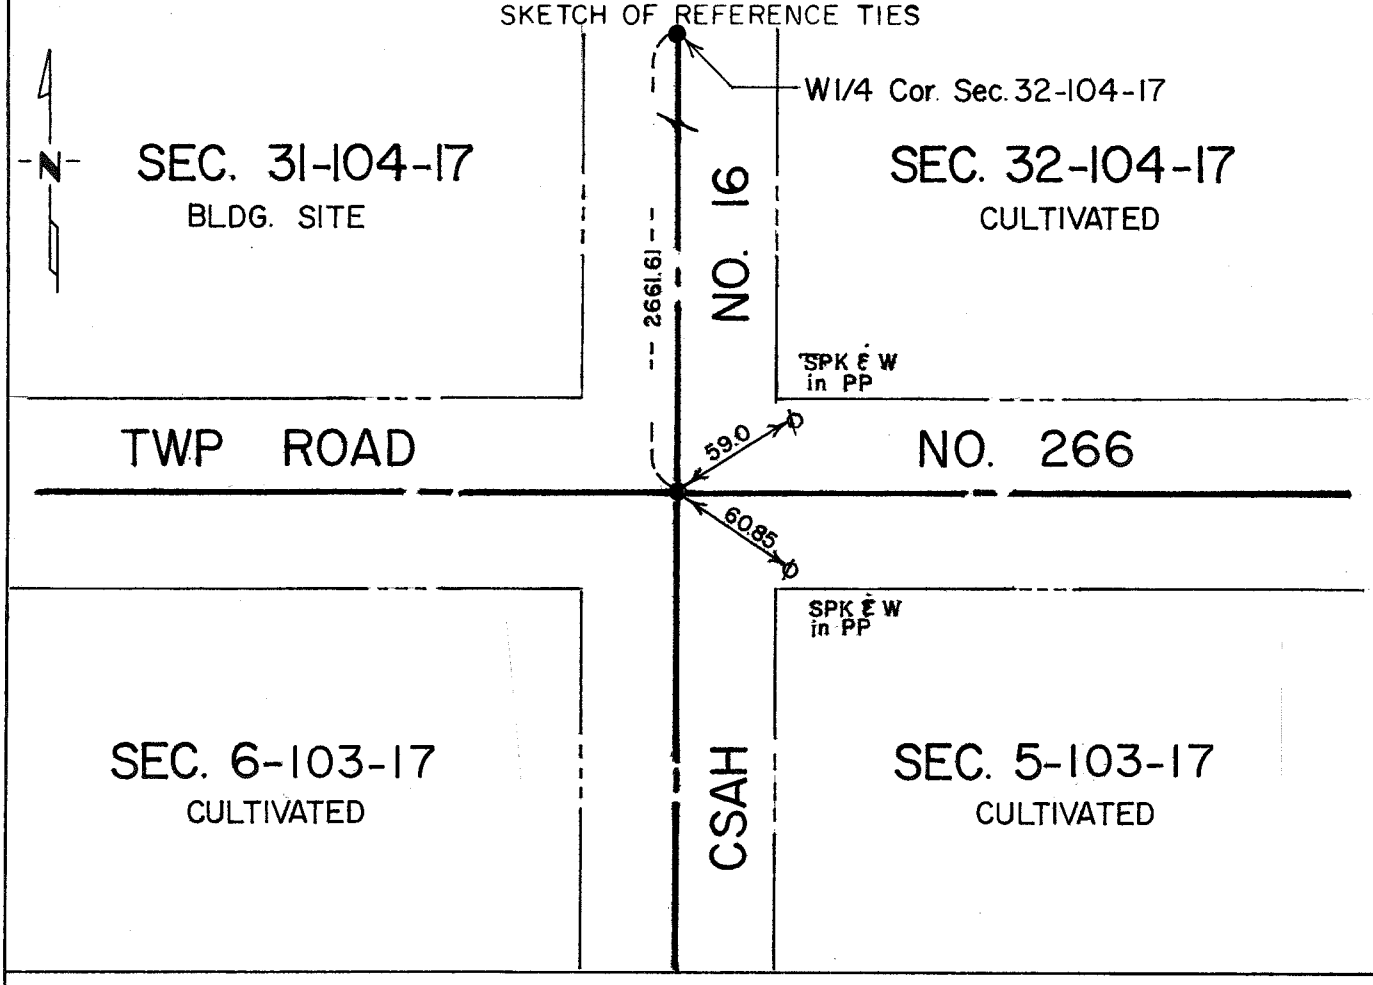

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-17-90

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Section 32-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Survey Office in 1853. The government notes show this corner was marked with a post with a trench and a mound of earth.

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorder's Office

1931 V.A. Nason uncovered concrete tile with brick in center and took ties. Notes were recorded in Book 'A' in the County Engineer's Office.

1990 Jones, Haugh & Smith crew dug with a jackhammer on centerline centerline of north-south-east-west roads. Found a 1/2" diameter iron cast in 6" clay tiles surrounded by three bricks 3.0 feet below road surface. Placed a 5/8" diameter iron and cast iron monument over 6" clay tile found.

Corner found fits centerlines and is accepted as the best evidence of a perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. P.61

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 32, Township 104, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 3-30-90 (DATE) found a 1/2"Ø iron cast in 6" clay tile surrounded by 3 bricks.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 3-30-90 (DATE) placed a cast iron monument over clay tile.

SKETCH OF REFERENCE TIES

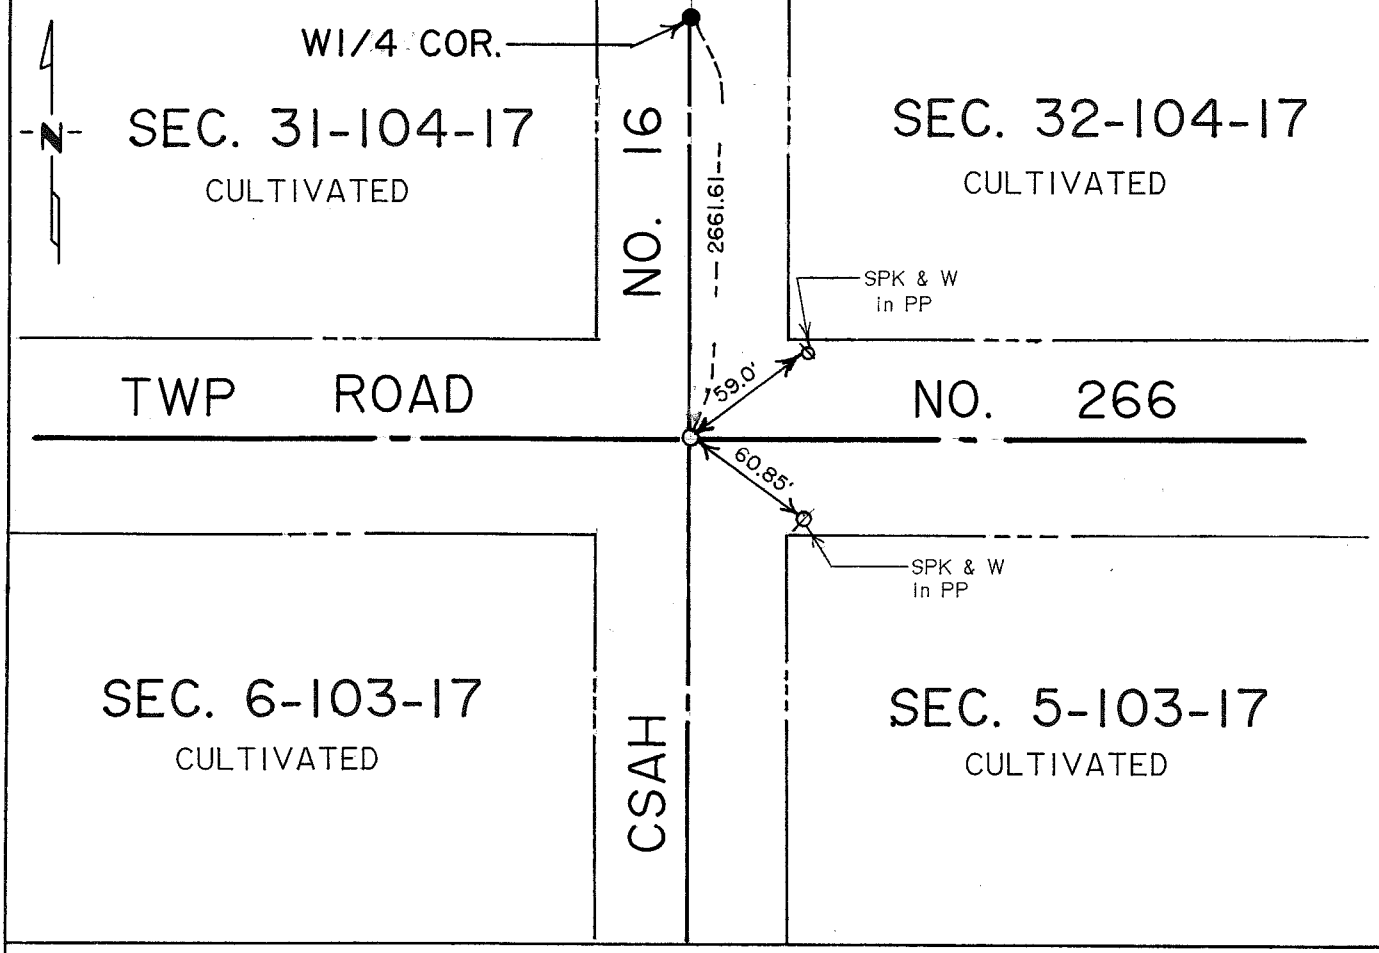

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 4-9-90 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Section 32-104-17

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Office in 1853. The government notes show this corner was marked with a charred stake in a mound of earth with a trench.

The following were contacted for section corner information:

Mower County Engineers Office
Mower County Recorders Office

Mower County Engineering Office - County Road Project shows an iron found.

1930 Records of A.C. White indicate clay tile with brick set at this location recorded in survey book in the Mower County Engineers Office.

1960 Mower County Grading Plan shows monument at this location.

1990 Jones, Haugh & Smith crew dug with a jackhammer and uncovered a 1/2" diameter iron in a 6" clay tile surround by three bricks 3.0 feet below road surface.

The monument found is in agreement with the records and is accepted as best evidence of Public Land Survey corner. Set cast iron monument over 6" clay tile.

For electronic survey data and analysis, contact the firm of Jones, Haugh & Smith Inc.

Recorded at Register of Deeds 4-21-77 TIE BOOK p 61 Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 33, Township 104N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 8-17-72 (DATE) found a 6 INCH BY 6 INCH CONCRETE MONUMENT, DOWN 1½ FOOT.

☐ left monument as found, ☐ lowered monument, ☒ removed monument (explain)

☒ On 4-25-75 (DATE) placed a MINNESOTA HIGHWAY DEPARTMENT CAST IRON MONUMENT 1/2 INCH DOWN.

SKETCH OF REFERENCE TIES

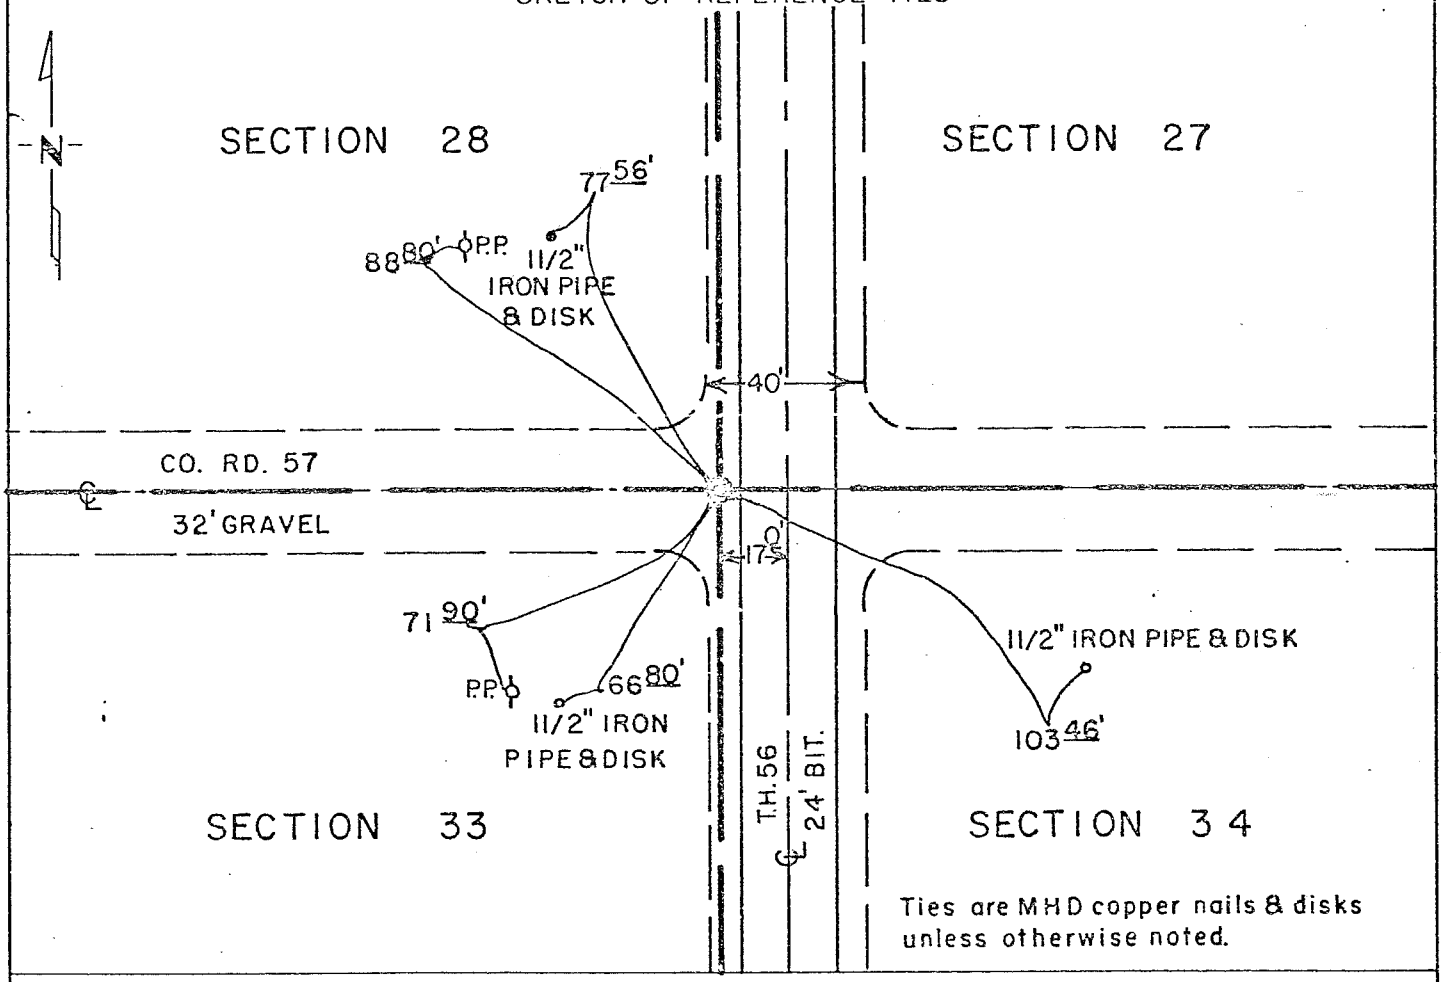

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald R Bielenberg 9/9/75
SIGNATURE DATE

Registration No. 8162

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____ .M. on the _____ day of _____ A.D., 19__

Register of Deeds _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

Statement of Evidence:

NORTHEAST CORNER OF SECTION 33, TOWNSHIP 104N, RANGE 17 W, 5th P.M.

November 1853 — John Fitzpatrick, Deputy Surveyor, deposited stone, made mound of earth and sod with trench and pits during the Original Public Land Survey.

July 1929 — C. Aasland, M.H.D. Engineer, found a stone 17.0 feet west of POT 1155+13.7, replaced with a 6 inch by 6 inch by 18 inch concrete monument, May 6, 1930.

1941 — O. J. Gerner, M.H. D. Engineer, found a 6 inch by 6 inch concrete monument 18 inches below the surface, 17.0 feet west of PI 1155+14.2.

1955 — E. L. Pehrson, M.H.D. Engineer, found a 6 inch by 6 inch concrete monument 18 inches below the surface, 17.7 feet west of PI 1155+14.2.

August 1972 — A. L. Sotebeer, M.H.D. Engineer, found a 6 inch by 6 inch concrete monument 18 inches below the surface, 17.0 feet west of PI 1155+14.2

1973 — M.H. D. regraded T.H. #56.

April 1975 — M.H.D. replaced the 6 inch by 6 inch concrete monument, which was destroyed during construction, with a Cast Iron Monument 3 inches below the road surface.

An analysis of the record data indicates that the concrete monument, which was set in 1930 to replace the stone found in 1929, was destroyed during road construction in 1973. The Cast Iron Monument was set to replace the concrete monument and is accepted as a perpetuation of the Public Land Survey corner.

For details of the Survey contact the District Surveying and Mapping Section of the Minnesota Highway Department, Rochester.

Recorded at Register of Deeds 4-21-77 Index No. TIE BOOK P61

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 33, Township 104N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 8-11-72 (DATE) found a 3/4 INCH IRON PIN. (DOWN 2.0')

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 4-25-75 (DATE) placed a MINNESOTA HIGHWAY DEPARTMENT CAST IRON MONUMENT ABOVE 3/4 INCH IRON PIN. (DOWN 1/2 INCH)

SKETCH OF REFERENCE TIES

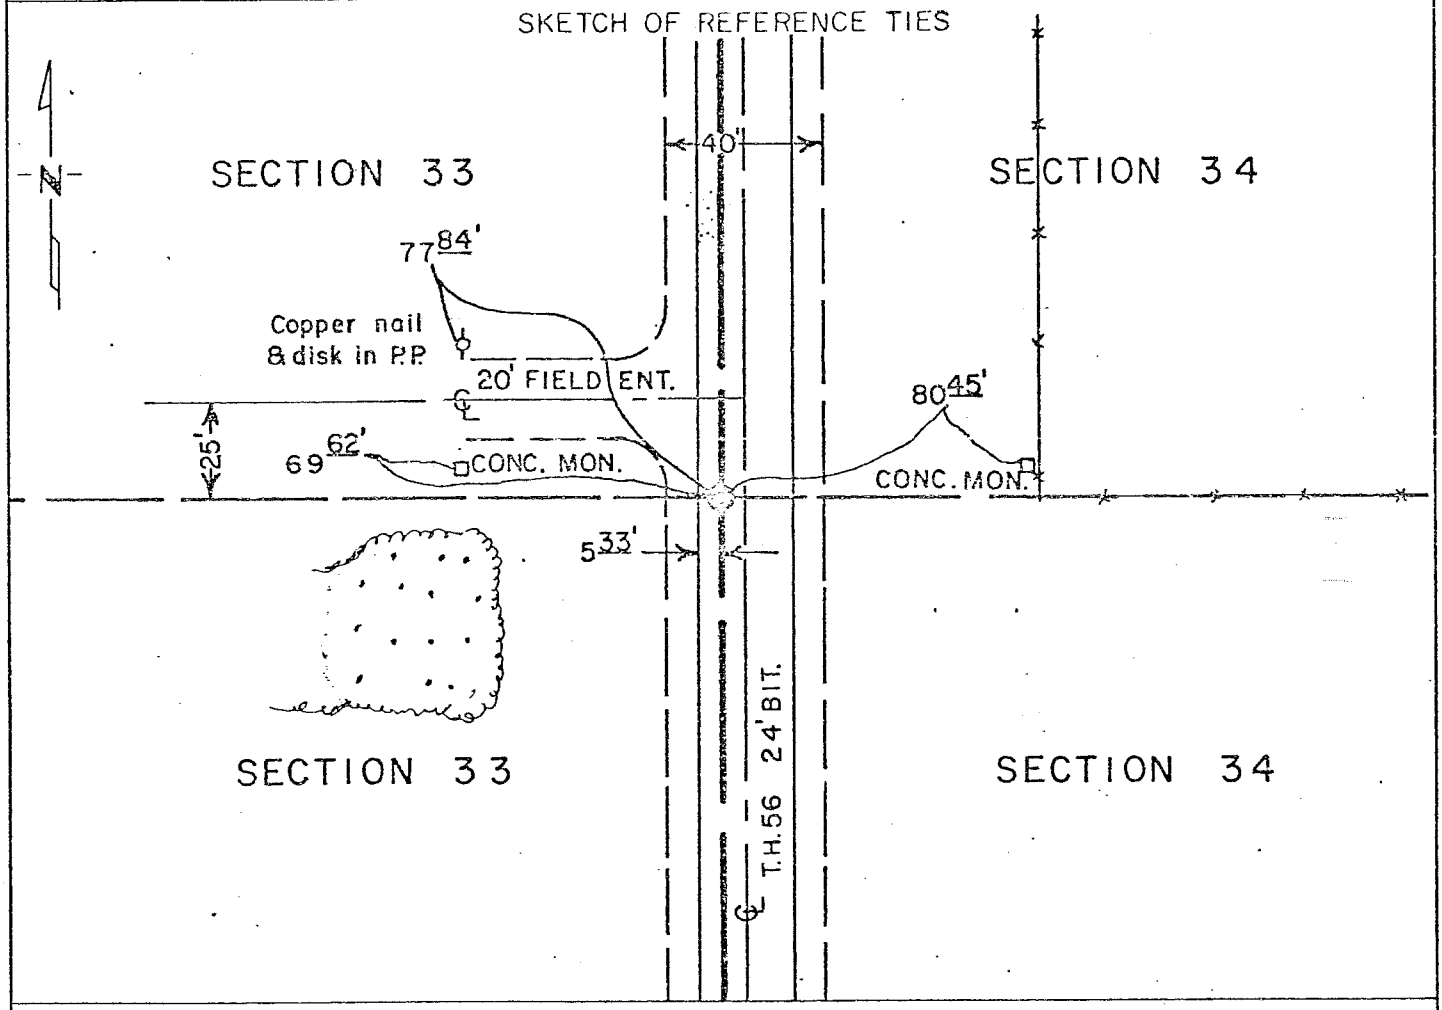

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Donald R Richardson (SIGNATURE) 9/8/75 (DATE)

Registration No. 12162

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____ .M. on the _____ day of _____ A.D., 19 ___

Register of Deeds _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

Statement of Evidence:

EAST QUARTER CORNER OF SECTION 33, TOWNSHIP 104N, RANGE 17W, 5th P.M.

November 1853 — John Fitzpatrick, Deputy Surveyor, set post, deposited stone, made mound of earth and sod with trench and pits during the Original Public Land Survey.

July 1929 — C. Aasland, M.H.D. Engineer, found a stone 5.5 feet west of P.O.T. 1128+32.1, replaced with an axel shaft on 5-6-30.

1941 — O. J. Gerner, M.H.D. Engineer, found a iron pin 14 inches below surface, 5.5 feet west, PI 1128+32.1.

1955 — E. L. Pehrson, M.H.D. Engineer, shows the 1/4 corner 5 feet west, PI 1128+35.8.

August 1972 — A. L. Sotebeer, M.H.D. Engineer, found a 3/4 inch iron pin 2.0 feet under surface, 5.33 feet west of PI 1128+32.1.

1973 — M.H.D. resurfaced T.H. 56 with bituminous.

April 1975 — M.H.D. placed a Cast Iron Monument above the 3/4 inch iron pin 1/2 inch below road surface.

An analysis of the record data indicates the 3/4 inch iron pin perpetuates the position of the stone found in 1929. The 3/4 inch iron pin is accepted as a perpetuation of the Public Land Survey Corner.

For details of the Survey contact the District Surveying and Mapping Section of the Minnesota Highway Department, Rochester.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 36, Township 104 Range 17, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/13/1995 (DATE) found a 1.5'X8" POINTED STONE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/13/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

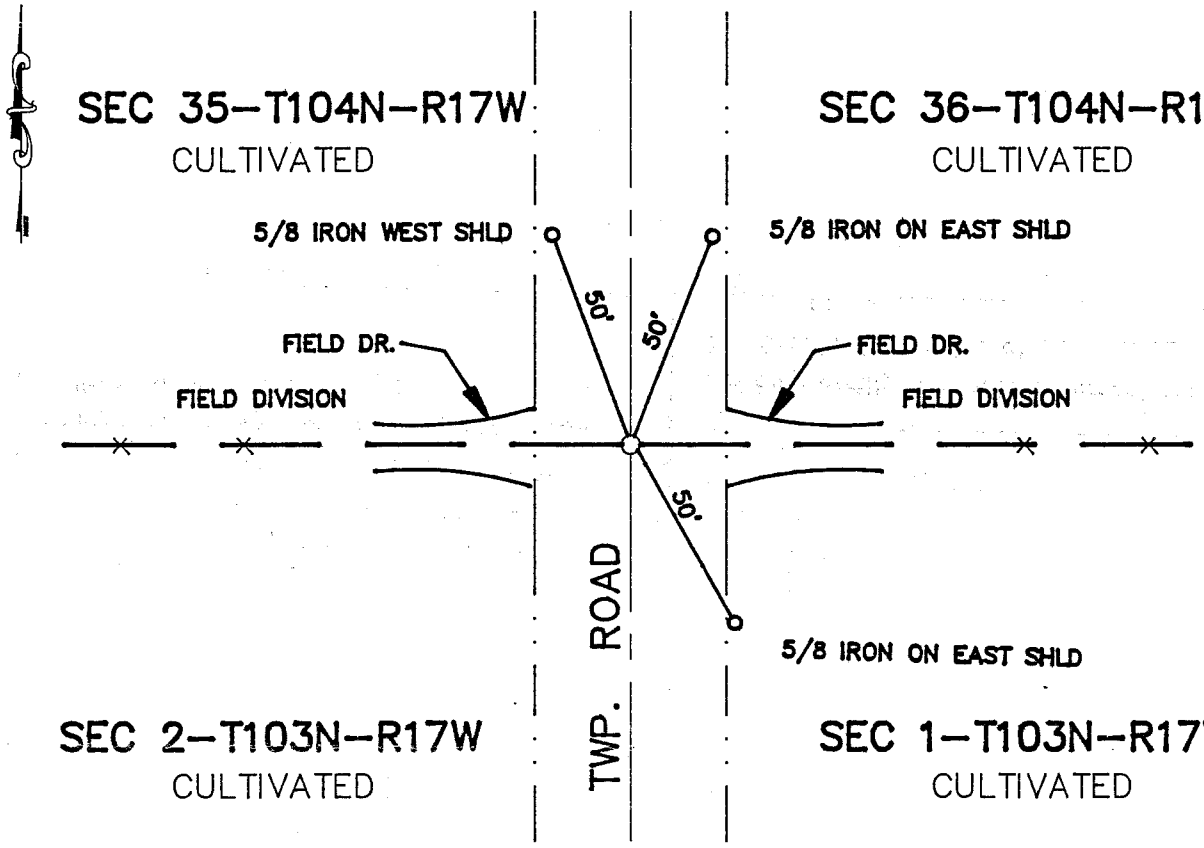

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-26-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P.M. on the 29 day of Jan A.D., 1996

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 442199

M.H.D. FORM NO. 2105 BOOK 90 PAGE 103

Book 90 Misc Page 103

SW Cor SEC 36-104-17

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones, Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of township road and in line with field division East and West. Found a 1.5'x8" pointed stone 3' below road surface. Continued digging to virgin soil and found no other evidence. Stone fit the CL of road and fits the field divisions East and West. Accepted stone as a perpetuation of the original PLS corner. Placed a 5/8"x16" iron on the North side of the stone. Placed a cast iron monument over the stone found.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.