Index No. P8V #W'

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 9, Township 104N, Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 9-22-86 (DATE) placed a cast iron monument

SKETCH OF REFERENCE TIES

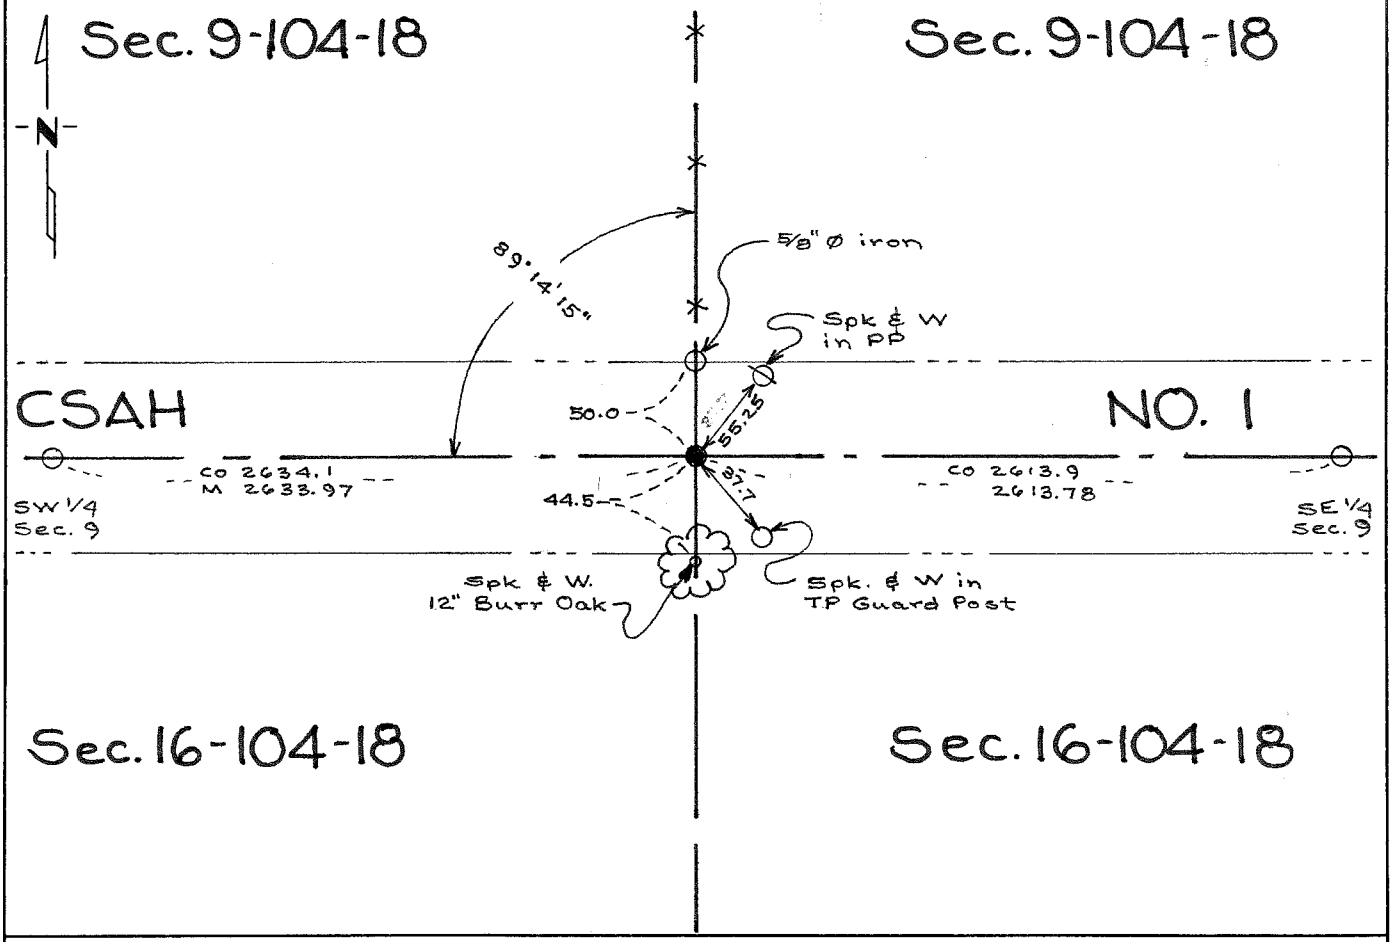

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] III 3-8-89
SIGNATURE DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

S 1/4 corner Sec 9-104-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set and the following ties were taken:

12" Burr Oak	N 57 1/2° E	60 links	=	39.6 ft
14" Burr Oak	S 55° E	200 links	=	132.0 ft

In 1986 Jones, Haugh & Smith Inc contacted the following for section corner information:

Mower County Highway Dept.
Tucker Land Surveying

The 1930 Mower County Grading Plan shows a core cut was made at this location and no monumentation was found.

Therefore we established the position of the corner using obliterated methods on a straight line between southwest and southeast section corners in line with the fence north.

The position fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh & Smith.

p82 "M"

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 9, Township 104N, Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 9-22-86 (DATE) found a concrete monument 5'± deep

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 9-22-86 (DATE) placed a 5/8"ø x 24" iron over concrete monument

SKETCH OF REFERENCE TIES

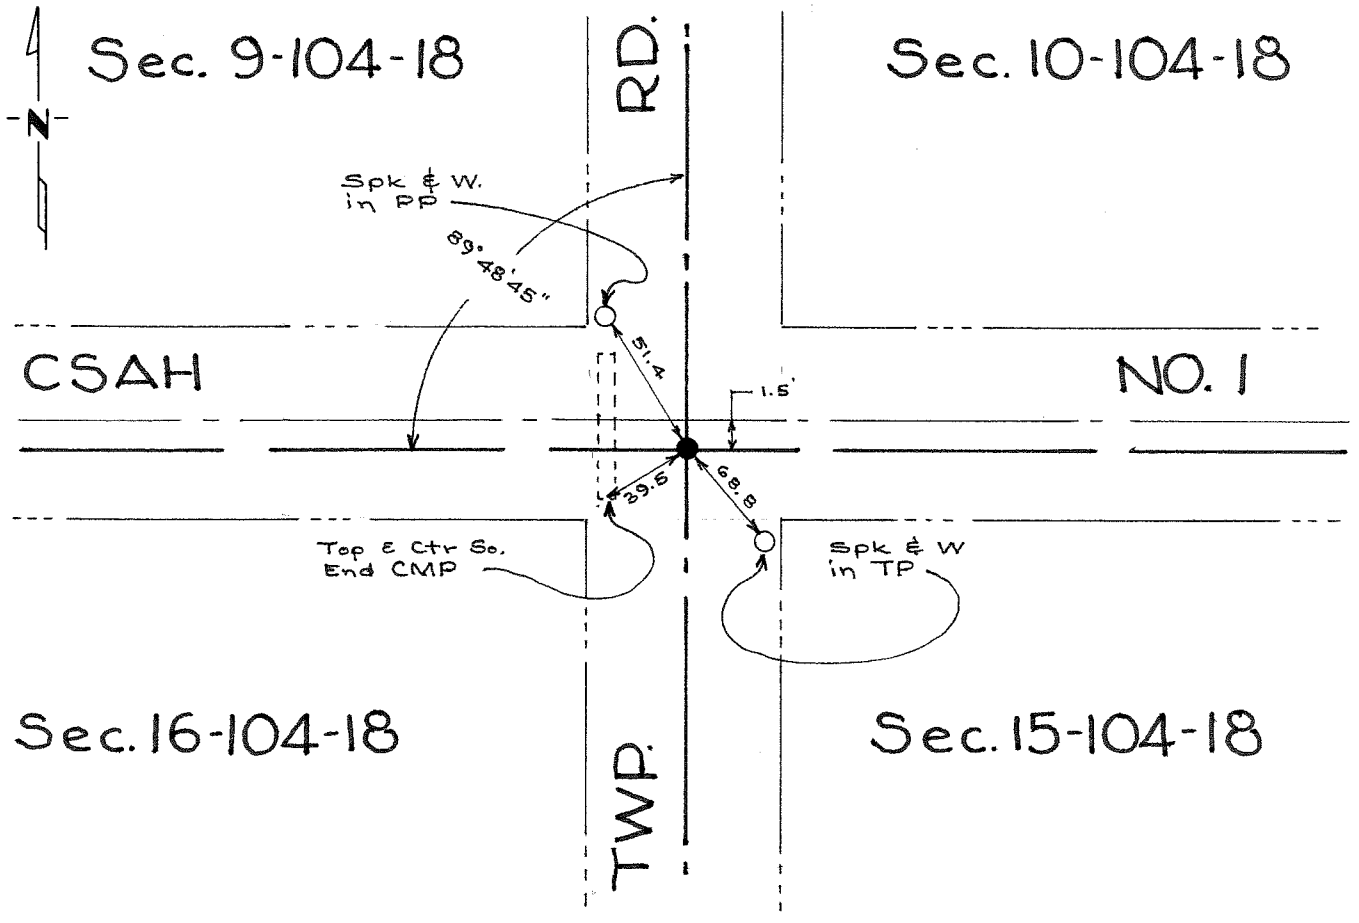

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] 3-8-89
SIGNATURE DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SE corner Sec 9-104-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show the corner was marked with a wood post and the following bearing trees were marked:

5" Burr Oak	S 32 1/2° W	365 links	= 240.9 ft
14" Burr Oak	S 40° E	295 links	= 194.7 ft

In 1986 Jones, Haugh & Smith Inc contacted the following for section corner information:

Mower County Highway Dept.
Tucker Land Surveying

The 1930 Mower County Grading Plan shows a concrete monument at this location.

No further information was obtained on this corner.

In September 1986 Jones, Haugh & Smith Inc crew together with the Mower County Highway Department backhoe operator dug with the county backhoe on the centerline centerline north-south-east-west roads and uncovered a 5" square concrete monument 5 feet more or less, below road surface in virgin soil. Backfilled and set a 5/8" diameter x 24" iron over the concrete monument on the road surface.

The monument found fits occupation and road centerlines within the section and agrees with 1930 records from Mower County Highway Department and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh & Smith.

Index No. p82 "J"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 9, Township 104N, Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 9-22-86 (DATE) found a wood stake, field stone & iron @ depth of 3.5'±

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 9-22-86 (DATE) placed a cast iron monument over

SKETCH OF REFERENCE TIES

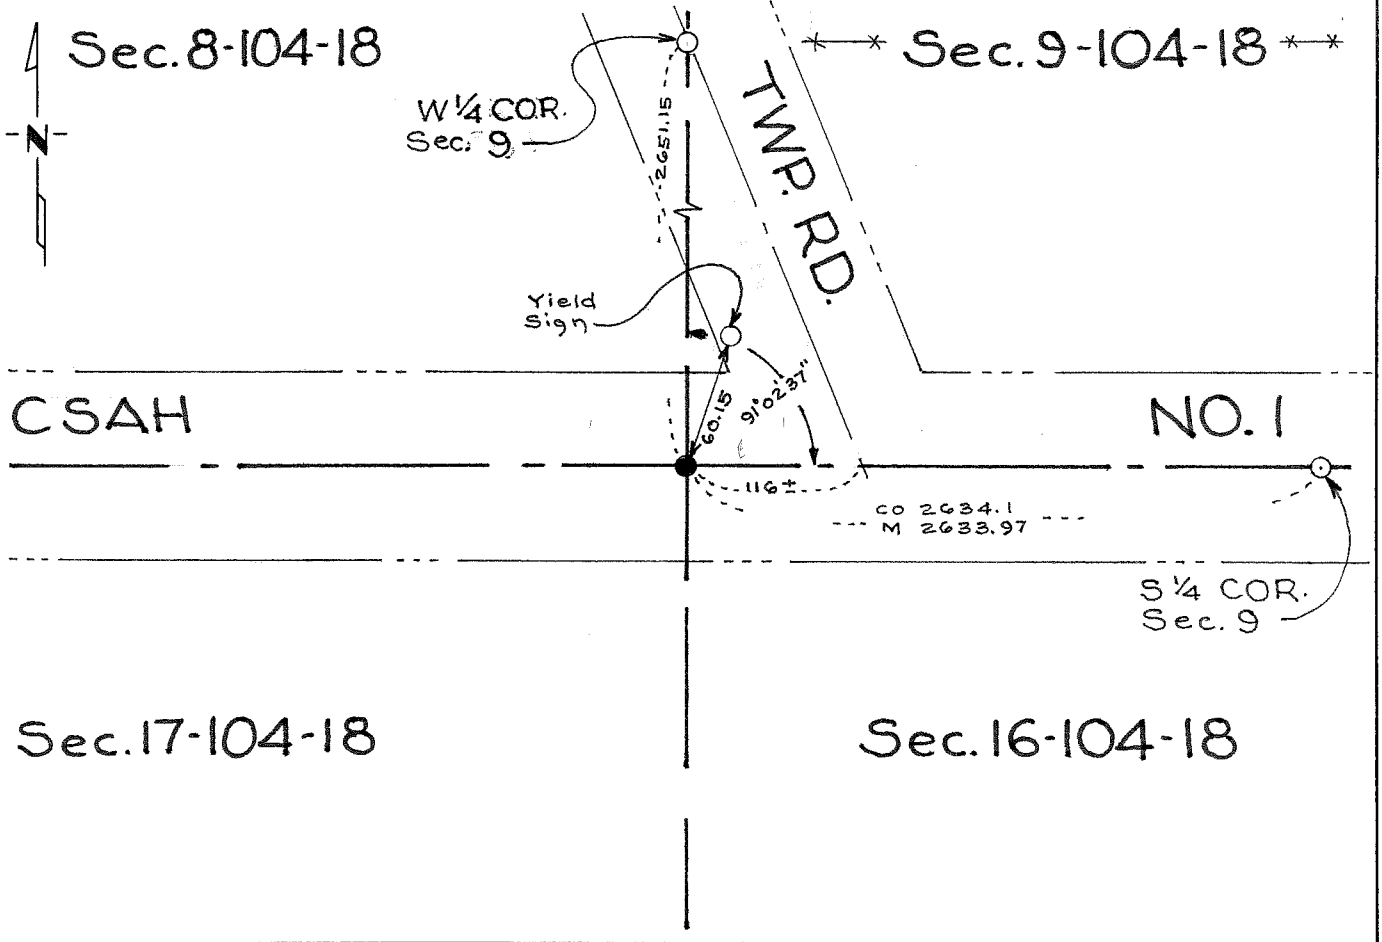

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 3-8-89 DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Sec 9-104-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set and the following ties were taken:

10" Burr Oak	S 38 1/2° E	640 links	=	422.4 ft
8" Burr Oak	N 70° E	440 links	=	290.40 ft

In 1986 Jones, Haugh & Smith Inc contacted the following for section corner information:

Mower County Highway Dept.
Tucker Land Surveying

The 1930 Mower County Grading Plan shows a monument was found during road construction.

In September 1986 Jones, Haugh & Smith Inc personnel together with the Mower County backhoe operator dug with the County backhoe on the centerline of the east-west road at the location of an iron pipe flush on road surface and uncovered a wood stake and field stone at a depth of 3.5 feet below road surface. The wood stake and stone were 3 feet more or less, west of the pipe found on road surface. Accepted the position of wood stake and field stone and set a cast iron monument over them on road surface and discarded pipe found on road surface.

The monument fits occupation and road centerlines within the section and agrees with 1930 records from Mower County Highway Department and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh & Smith.

Index No. P82 "H"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 9, Township 104N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 6-13-90 (DATE) found a 10"x 15"x 20" pointed field stone 3.0' below road surface in virgin soil.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6-13-90 (DATE) placed a 5/8"Ø iron on east side of stone and over monument found.

SKETCH OF REFERENCE TIES

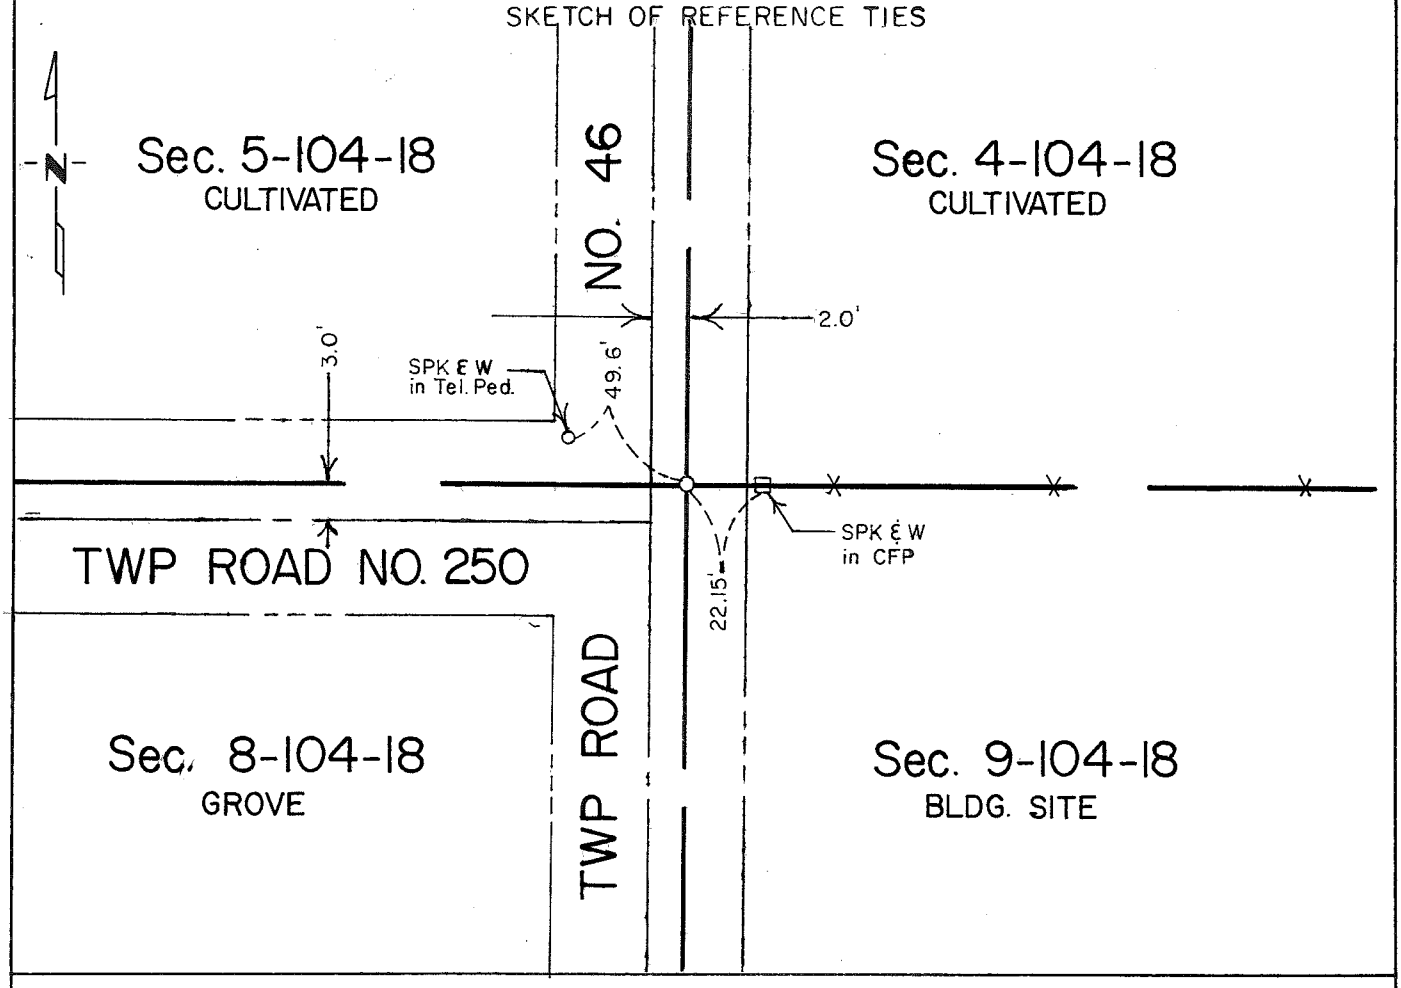

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 9-17-90 DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Section 9-104-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show this corner was marked with a charred stake with a trench and a mound of earth.

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorder's Office

1990 Jones, Haugh & Smith crew together with the Mower County backhoe dug a hole 15'x10'x3' deep on centerline centerline of north-south-west roads. Uncovered a 10"x15"x20" point field stone in virgin soil 3.0 feet below road surface. Placed a 5/8" diameter iron on east side of stone and a 5/8" diameter iron over monument found.

Corner found fits occupation lines and is accepted as best evidence and perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. p82 "I"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 9, Township 104N, Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On Sept. 1986 (DATE) placed a 5/8" ϕ x 24" iron

SKETCH OF REFERENCE TIES

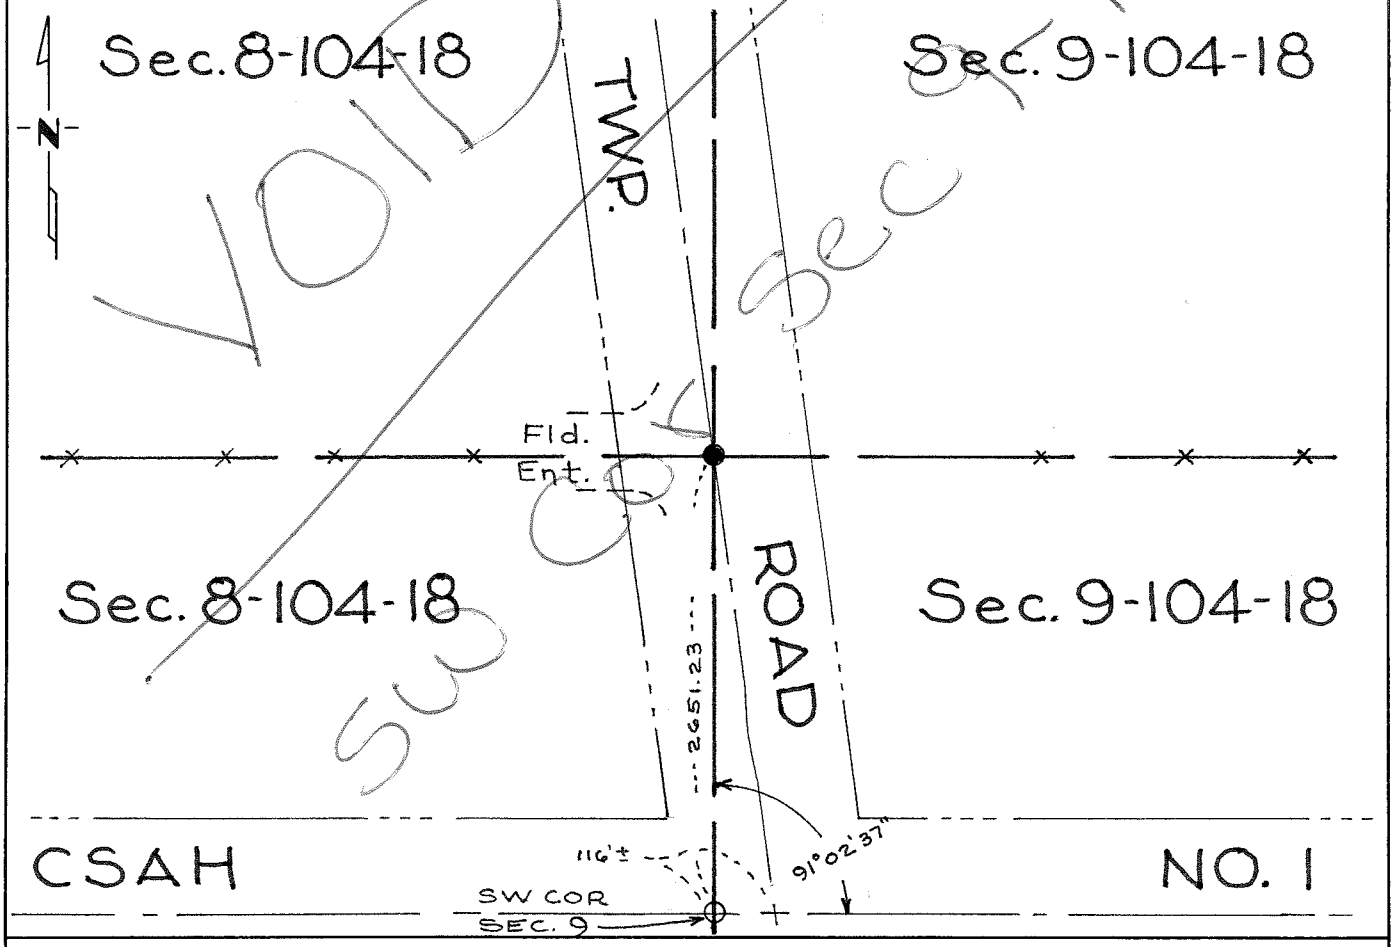

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] 3-8-89
SIGNATURE DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Sec 9-104-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set and a charred stake was deposited in a mound of earth during original public land survey.

In 1986 Jones, Haugh & Smith Inc contacted the following for section corner information:

Mower County Highway Dept.
Tucker Land Surveying

No information or surveys in the area were found to have been done.

In September 1986 Jones, Haugh & Smith Inc crew, together with the Mower County Highway Department backhoe operator dug on the centerline of north-south road in line with fence west. An 8 x 40 long hole was dug and no evidence of the public land survey corner or a perpetuation thereof was found. Therefore after the completion of a traverse around the section and analysis of existing fence and occupation lines a fence line occupying the north line of the SE 1/4 was extended westward to intersect with the centerline of the north-south township road.

The position fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh & Smith.

Index No. 982 "K"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 9, Township 104N, Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On Sept. 1986 (DATE) found a 6" dia. wood fence post in a 3 way fence intersection

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

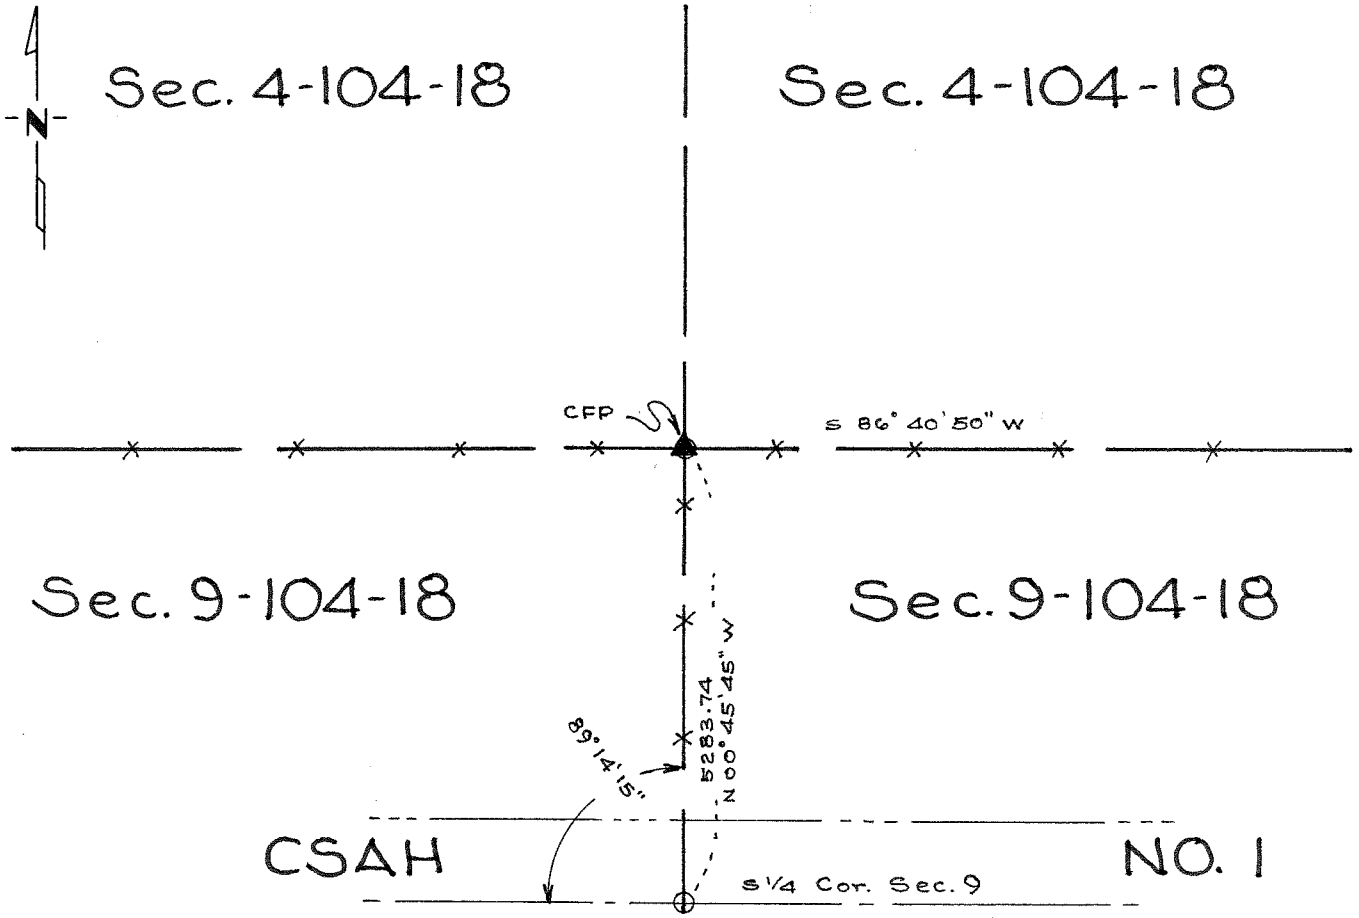

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] 3-6-89
SIGNATURE DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Sec 9-104-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show the corner was marked with a wood post and the following bearing trees were marked:

12" Burr Oak	N 15° W	82 links	= 54.12 ft
6" Burr Oak	S 64° W	15 links	= 9.90 ft

In 1986 Jones, Haugh & Smith Inc contacted the following for section corner information:

Mower County Highway Dept.
Tucker Land Surveying

No information or surveys in the area were found to have been done.

In September 1986 Jones, Haugh & Smith Inc crew traversed around the section and found a 6" diameter wood corner fence post in a 3-way fence intersection. After computing a section breakdown, we accepted the position of corner fence post as best evidence of the public land survey corner.

The position fits occupation and fence lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh & Smith.