Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 10, Township 104N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/14/1995 (DATE) found a POINTED STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/14/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

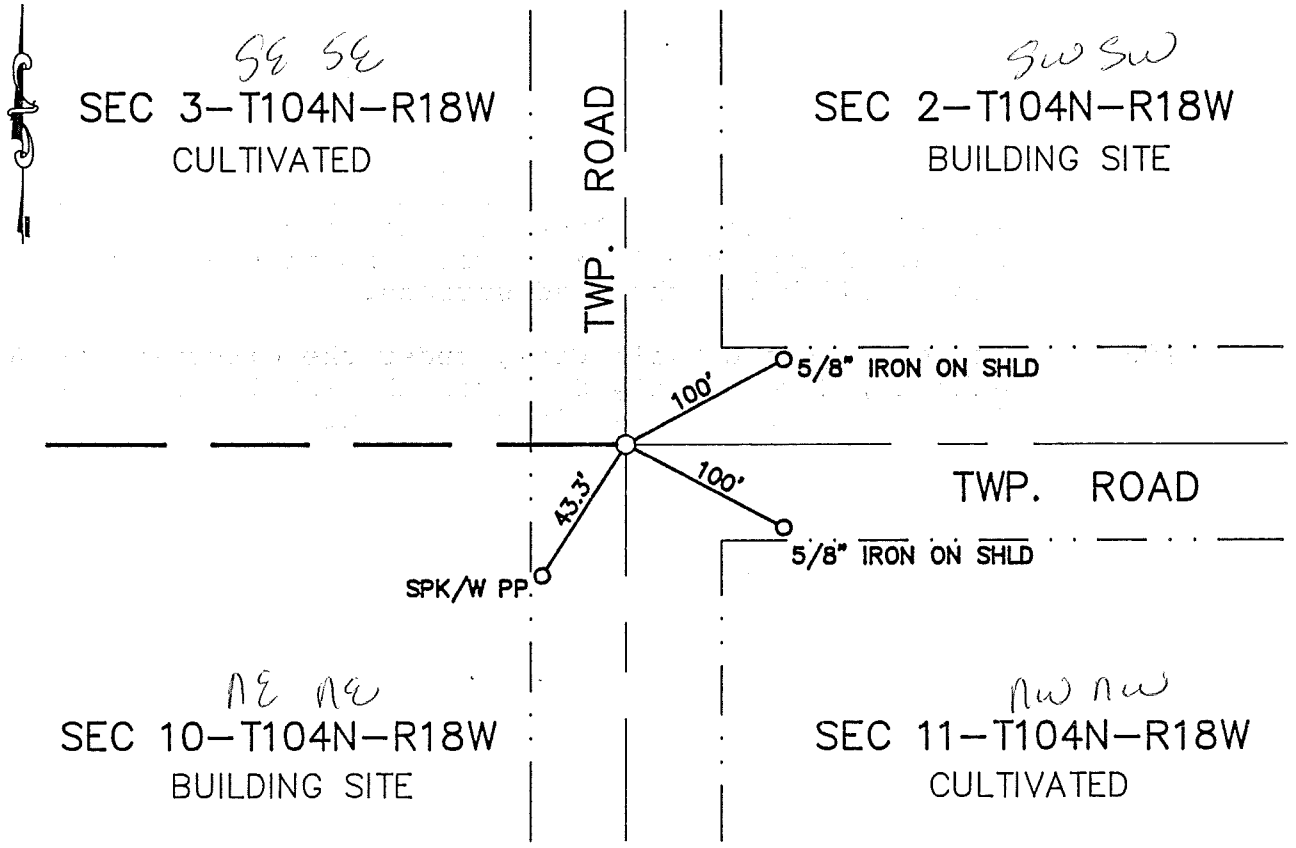

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 3-13-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 9 o'clock A.M. on the 15th day of March A.D., 1996

COUNTY RECORDER Charles Engel

By Mary Lou Ayala, Deputy

DOCUMENT NO. 443133

M.H.D. FORM NO. 2105 BOOK 90 PAGE 419 Book 90 Page 419

NE Cor SEC 10-104-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1988 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of township road N-S and in line with fence line west. Found a 1" pipe at a depth of 2'. Placed a 5/8" iron capped #13807 above the pipe found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 10, Township 104N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 09/01/1995 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 09/01/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

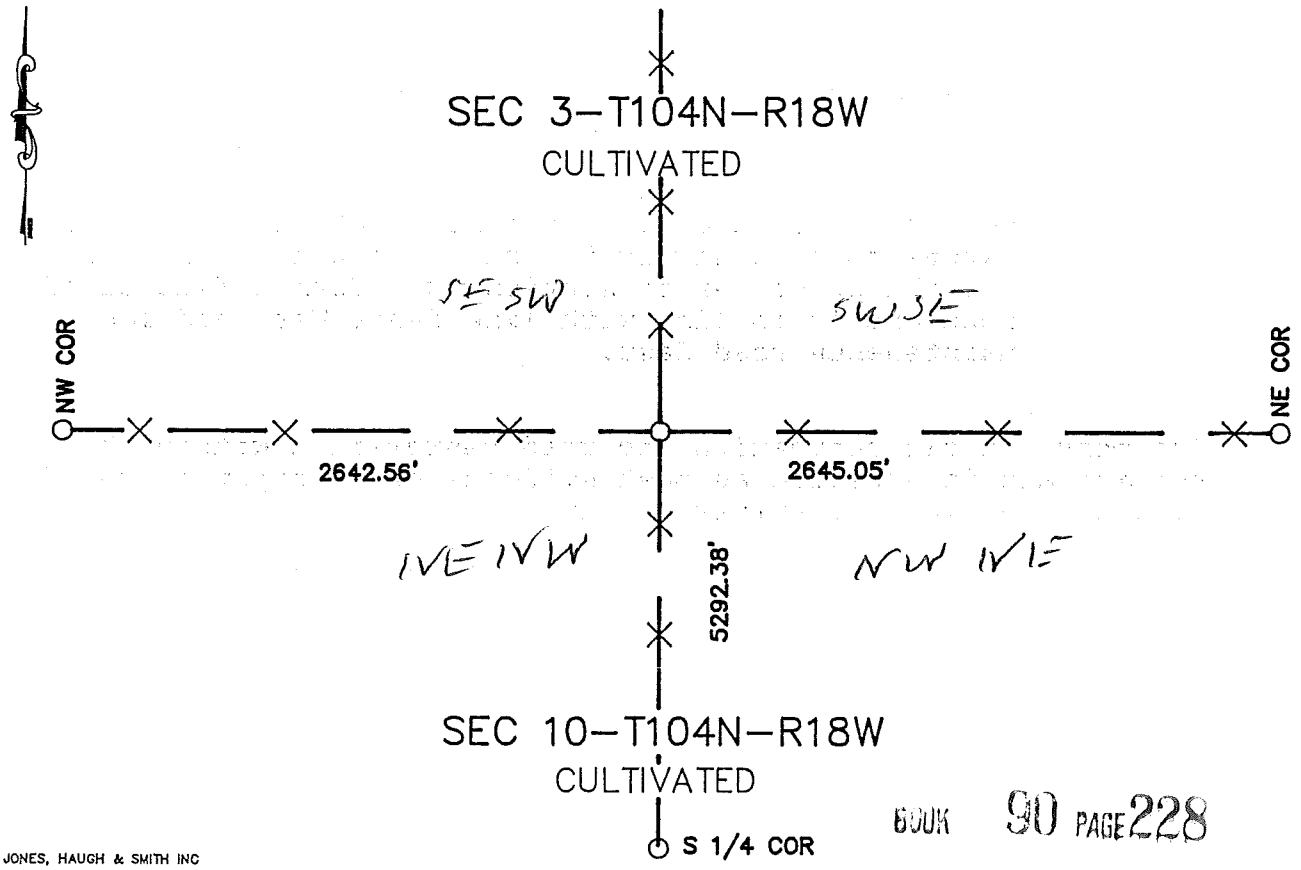

BOOK 90 PAGE 228

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 2-13-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4 P .M. on the 15 day of Feb A.D., 1996

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 142563

M.H.D. FORM NO. 2105

Book 90 Misc Page 228

N 1/4 Cor SEC 10-104-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth was built with a trench around.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand at the intersection of fence line N-S and fence E-W. Found no evidence of original PLS corner. Placed a cast iron monument at the intersection of the fence lines.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 10, Township 104N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/14/1995 (DATE) found a LARGE ROCK

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/14/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

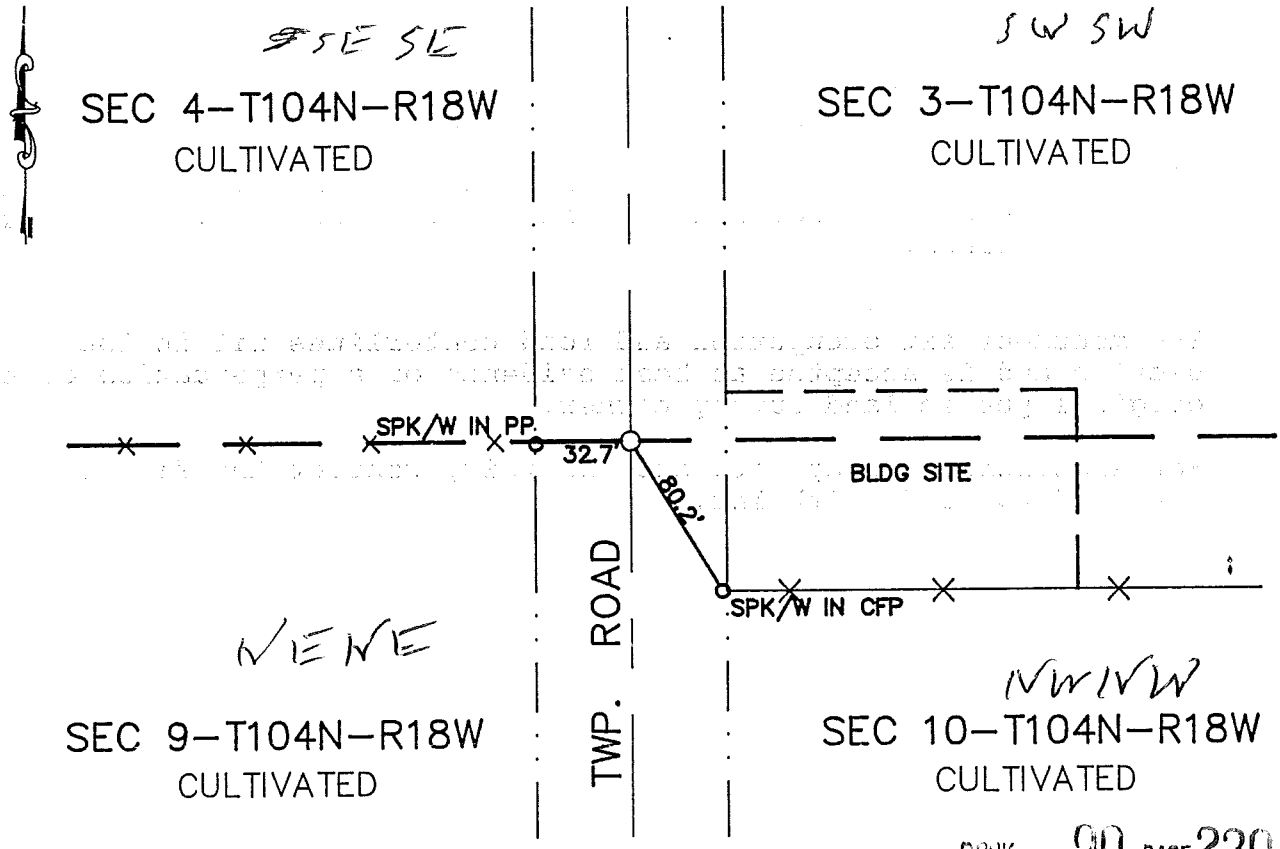

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 90 PAGE 230

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 2-13-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4 P.M. on the 15 day of Feb A.D., 1996

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 142564

M.H.D. FORM NO. 2105

Book 90 Misc Page 230

NW Cor SEC 10-104-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth was built with a trench around.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of N-S township road and in line with line fence West. Uncovered a large rock 1'x2'. Continued digging to virgin soil and found no other evidence of original PLS corner. Accepted the rock as a perpetuation of the original PLS corner and placed a 5/8" iron on the North side of the rock and set cast iron monument over the rock found 0.5"+- below the road surface.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 10, Township 104N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/14/1995 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/14/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

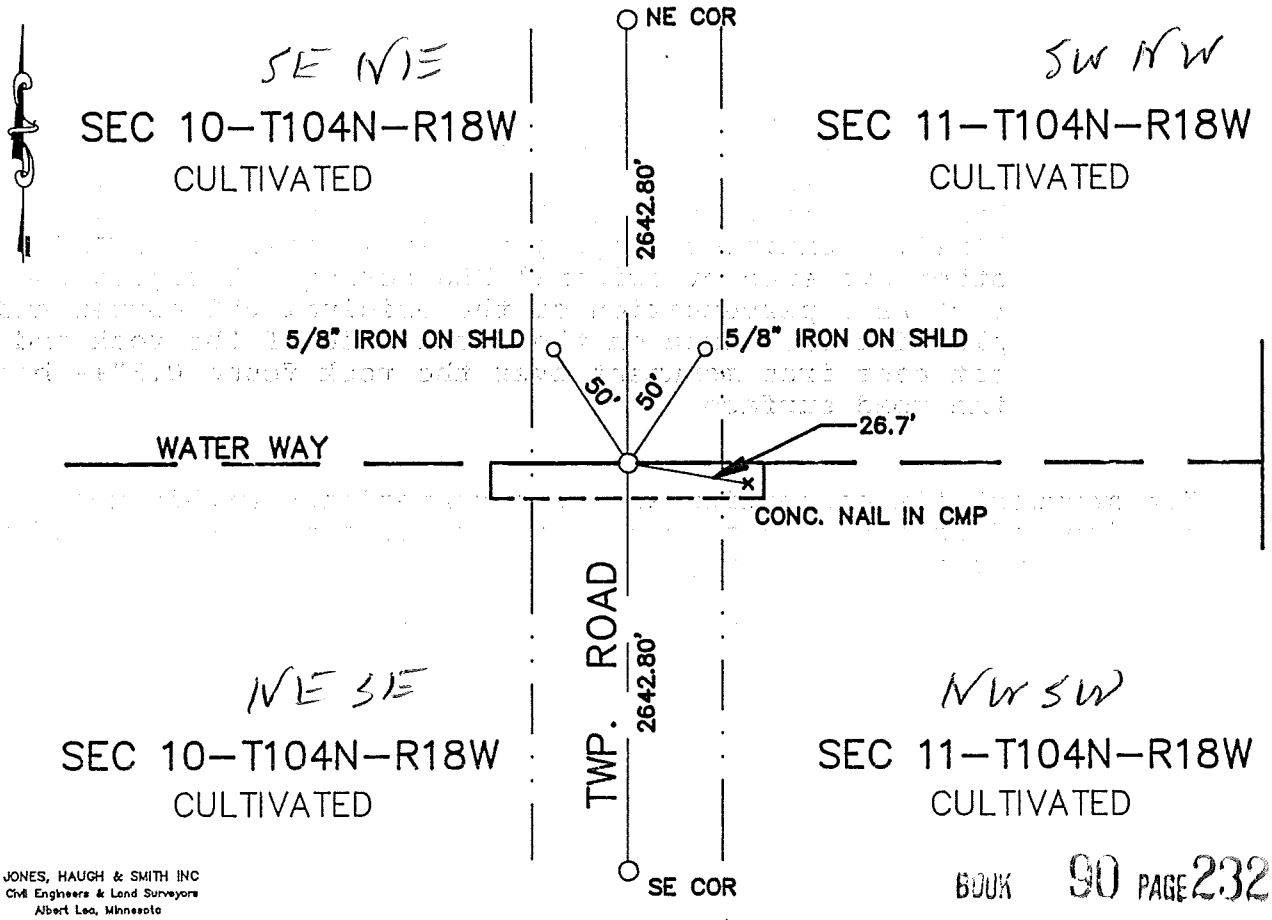

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 90 PAGE 232

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 2-8-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4p .M. on the 15 day of Feb A.D., 1996

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 442565

M.H.D. FORM NO. 2105

Book 90 Misc Page 232

E 1/4 Cor SEC 10-104-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth was built with a trench around.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, found that the original PLS corners have been destroyed by the installation of a culvert therefore we placed a cast iron monument at the midpoint of a straight line between the NE and SE corners.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 10, Township 104N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 09/14/1995 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 09/14/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

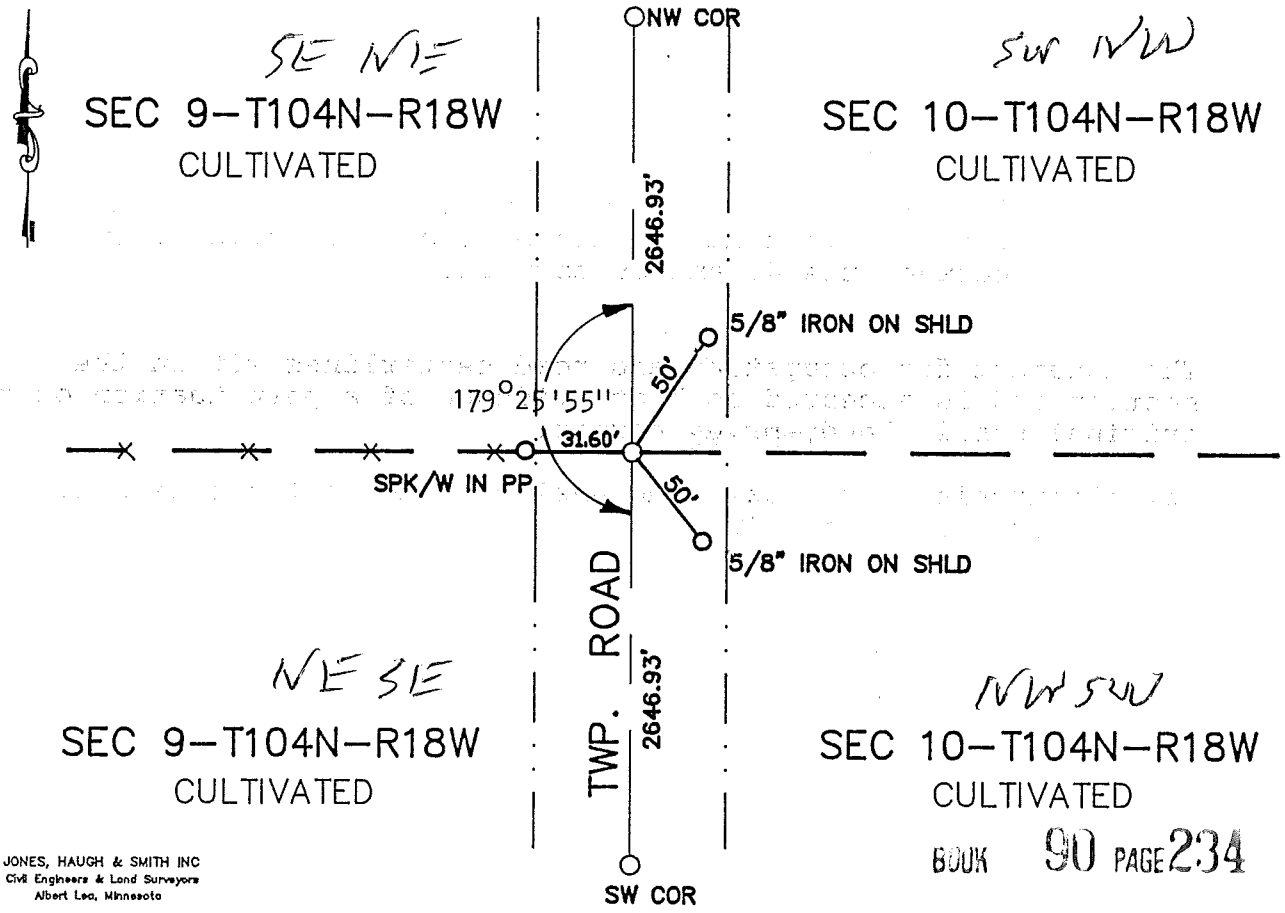

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 90 PAGE 234

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 2-13-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4 p .M. on the 15 day of Feb A.D., 1996

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 442566

M.H.D. FORM NO. 2105

Book 90 Misc Page 234

W 1/4 Cor SEC 10-104-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth was built with a trench around.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of township road N-S and in line with line fence West. Dug to virgin soil and found no evidence of the original PLS corner. Placed a cast iron monument on the CL of the N-S township road at the midpoint between the NW and the SW section corners.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 11, Township 104N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 09/14/1995 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 09/14/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

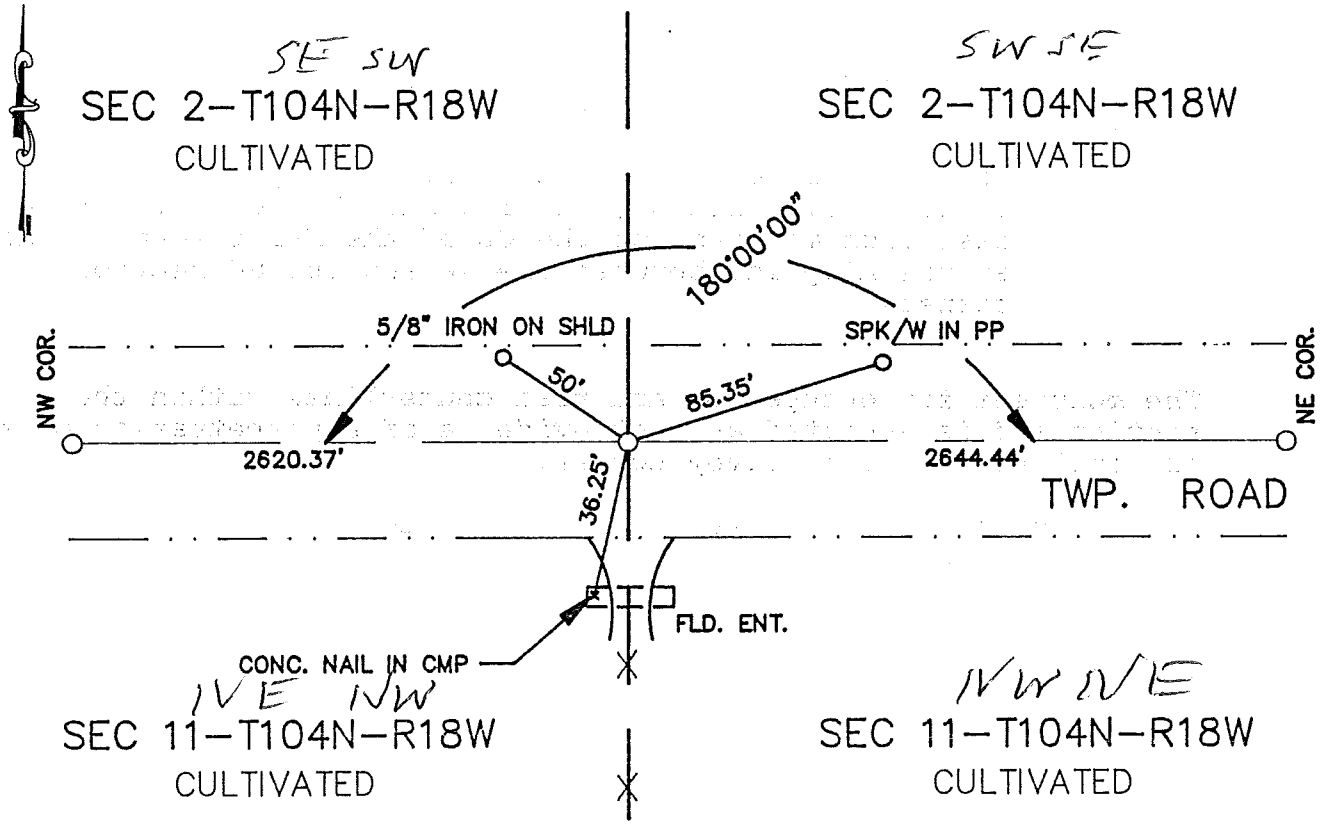

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 90 PAGE 236

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 2-13-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4 P.M. on the 15 day of Feb A.D., 1996

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 142567

M.H.D. FORM NO. 2105

Book 90 Misc Page 236

N 1/4 Cor SEC 11-104-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth was built with a trench around.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of township road E-W and in line with line fence N-S. Dug to virgin soil and found no evidence of original PLS corner. Placed a cast iron monument on a straight line between the NW and the NE section corners in line with existing fence to the South.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 12, Township 104N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 9-3-93 (DATE) found a 4"X 24" WOOD STAKE 1' FOOT BELOW ROAD SURFACE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 9-3-93 (DATE) placed a CAPPED 5/8ø ON CNT. OF STAKE
SET CIM OVER 5/8ø & WOOD STAKE

SKETCH OF REFERENCE TIES

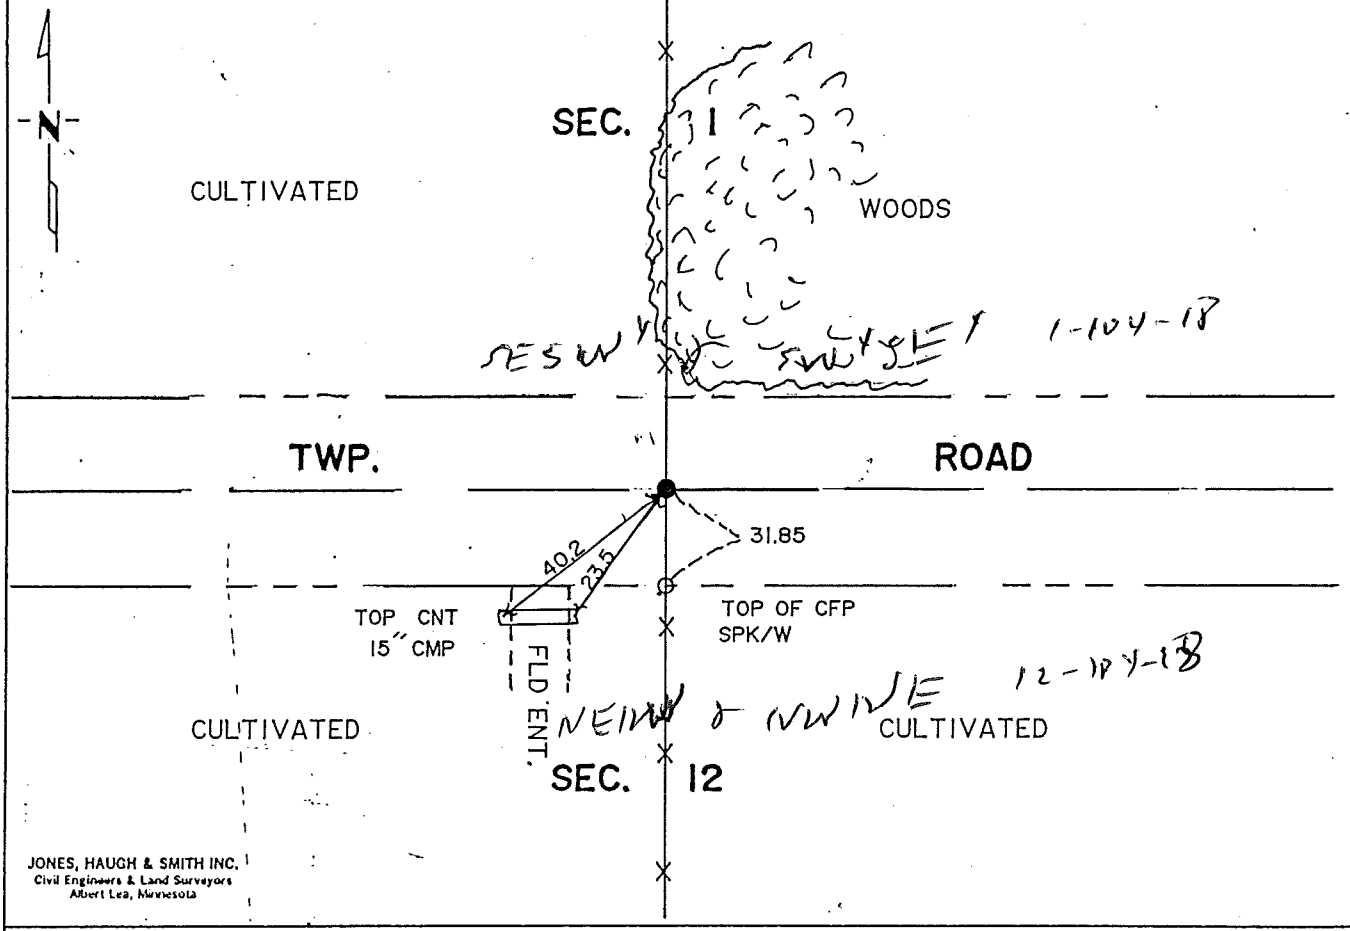

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-7-94

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A.M. on the 11 day of July A.D., 1994

COUNTY RECORDER Charles Engel

By Marlene Martin, Deputy

DOCUMENT NO. 430569
Book 84 Misc Pg 7

LAND FORM NO. 2105 BOOK 84 PAGE 7

STATEMENT OF EVIDENCE

N 1/4 cor 12-104-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show this corner was marked with a wood post and a trench with a mound of earth.

10" Burr Oak N 73° E

The following were contacted for section corner information:
Mower County Engineering Department
Minnesota Department of Transportation

No information on the corner was obtained from Mower County or Minnesota Department of Transportation.

1993 Jones, Haugh & Smith Inc personnel under the direction of John H. Schulte IV, RLS 13807, excavated with a backhoe a 3'x8'x3' deep hole on centerline of east-west township road and in line with south fence and edge of woods north. Found a 4" diameter x 24" wood stake at one foot. Continued digging and uncovered pieces of clay tile one foot below wood stake found. Dug into virgin soil and found no other evidence. Left monuments as found and set a capped 5/8" diameter x 18" iron in center of stake found and set cast iron monument near road surface above stake.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 12, Township 104N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 9-3-93 (DATE) found a 12"x12"x18" POINTED STONE-4FT. BELOW SURFACE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 9-3-93 (DATE) placed a CAST IRON MONUMENT ABOVE STONE

SKETCH OF REFERENCE TIES

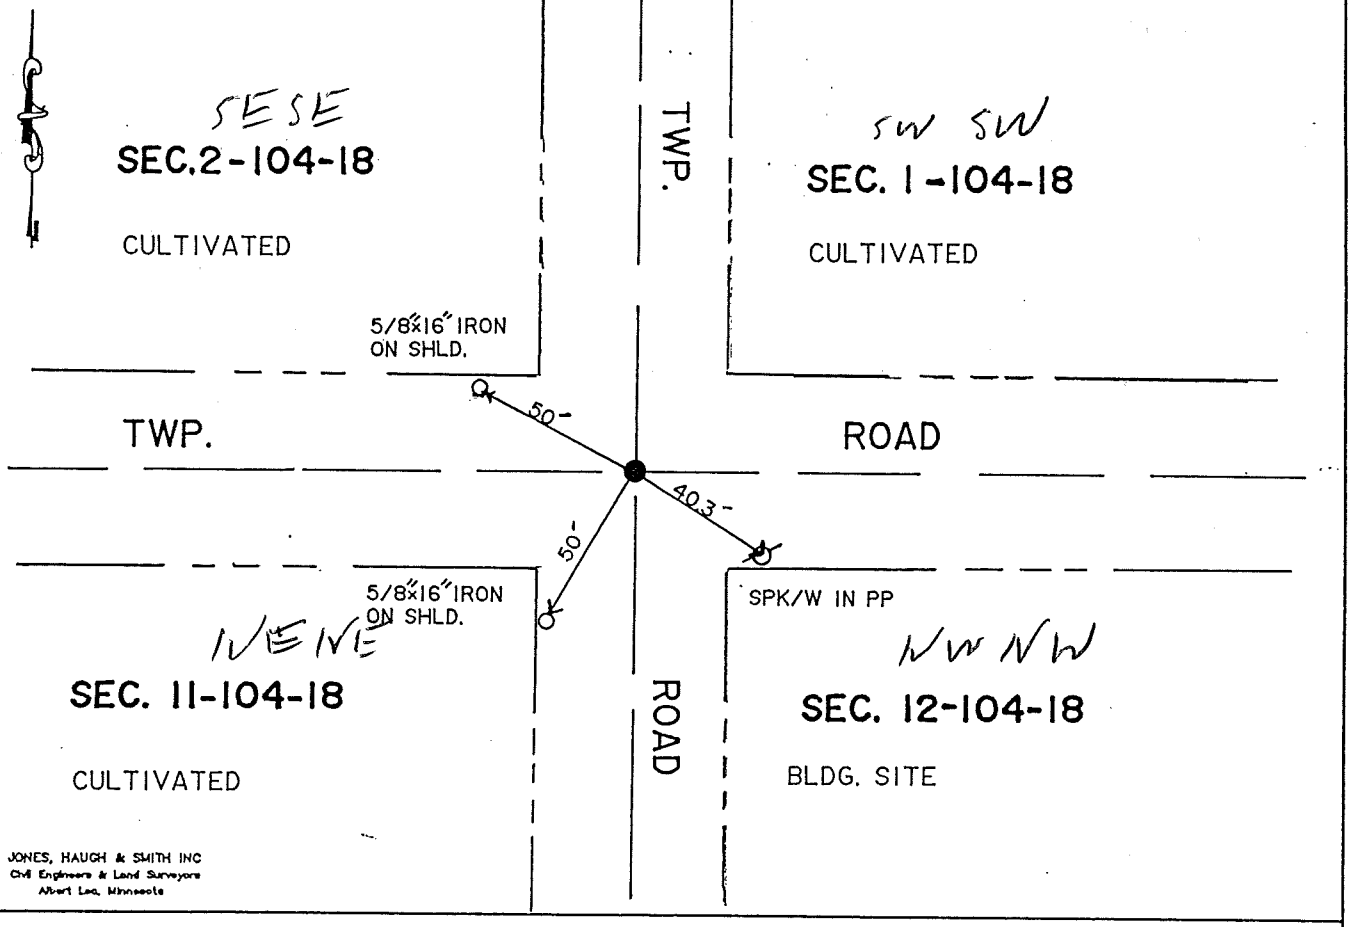

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-7-94

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A.M. on the 11 day of July A.D., 1994

COUNTY RECORDER Charles Engen

By Marlene Martin, Deputy

DOCUMENT NO. 430570

M.H.D. FORM NO. 2105

BOOK 84 PAGE 9 Book 84 Misc Pg 9

STATEMENT OF EVIDENCE

NW cor 12-104-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show this corner was marked with a wood post.

16" Burr Oak	S 47° W	30 links
8" Burr Oak	S 38° E	260 links

The following were contacted for section corner information:
Mower County Engineering Department
Minnesota Department of Transportation

No information on the corner was obtained from Mower County or Minnesota Department of Transportation.

1993 Jones, Haugh & Smith Inc personnel under the direction of John H. Schulte IV, RLS 13807, excavated with a backhoe a 4'x12'x5' deep hole on centerline centerline of township roads. Found a 12"x12"x18" pointed field stone at a depth of four feet and resting in virgin soil. Dug around stone and found no other evidence. Left stone as found and set a capped 5/8" diameter x 18" iron on north side of stone and a cast iron monument near road surface above stone found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 12, Township 104N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 3-9-93 (DATE) found NO EVIDENCE PLS CORNER

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 3-9-93 (DATE) placed a CASTIRON MON.

SKETCH OF REFERENCE TIES

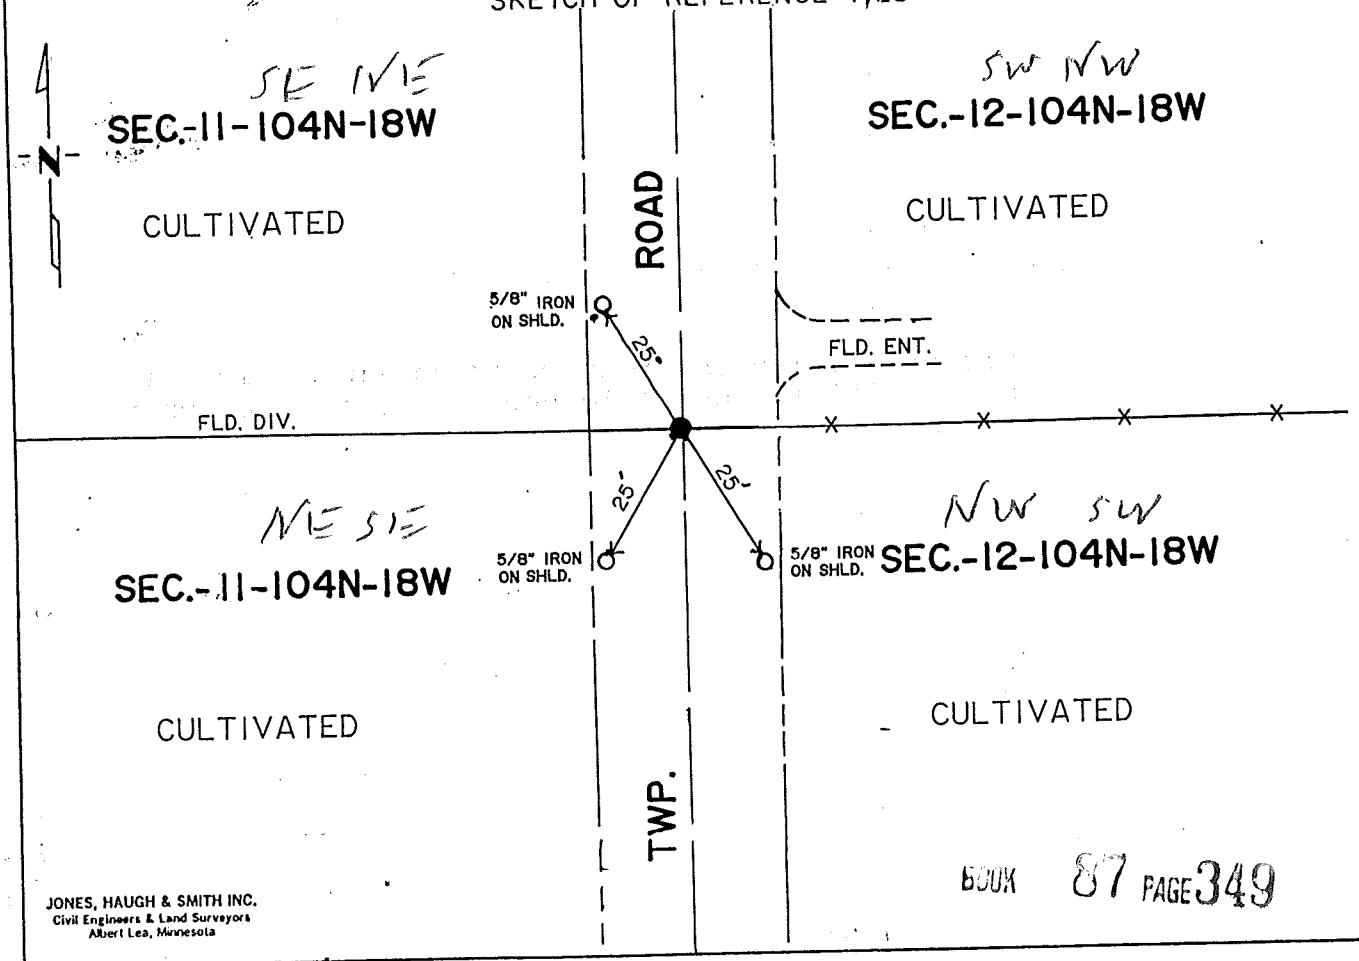

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 87 PAGE 349

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-12-95

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A .M. on the 19 day of June A.D., 19 95

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 437352

Book 87 Misc Page 349

M.H.D. FORM NO. 2105

W 1/4 SEC 12-104-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show this corner was marked by a charred stake with a mound and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1993 Jones, Haugh and Smith crew, under the direction of John Schulte, Mower Co. Surveyor, RLS 13807, dug with county backhoe a 4' X 12' X 3' deep hole on CL N-S twp. road in line with a fence line to the east and field division west. Road was found to have been core cut as evidenced by 2' of 1.5" rock fill. Rock was into virgin soil. Set CIM near road surface on line between the NW and SW corners of sec. 12 and in line with fence to the east and a field division to the west. The corner is in line with road centerline N-S.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

BOOK 87 PAGE 350

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 13, Township 104N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 10-9-92 (DATE) found a NOTHING

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6-12-93 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

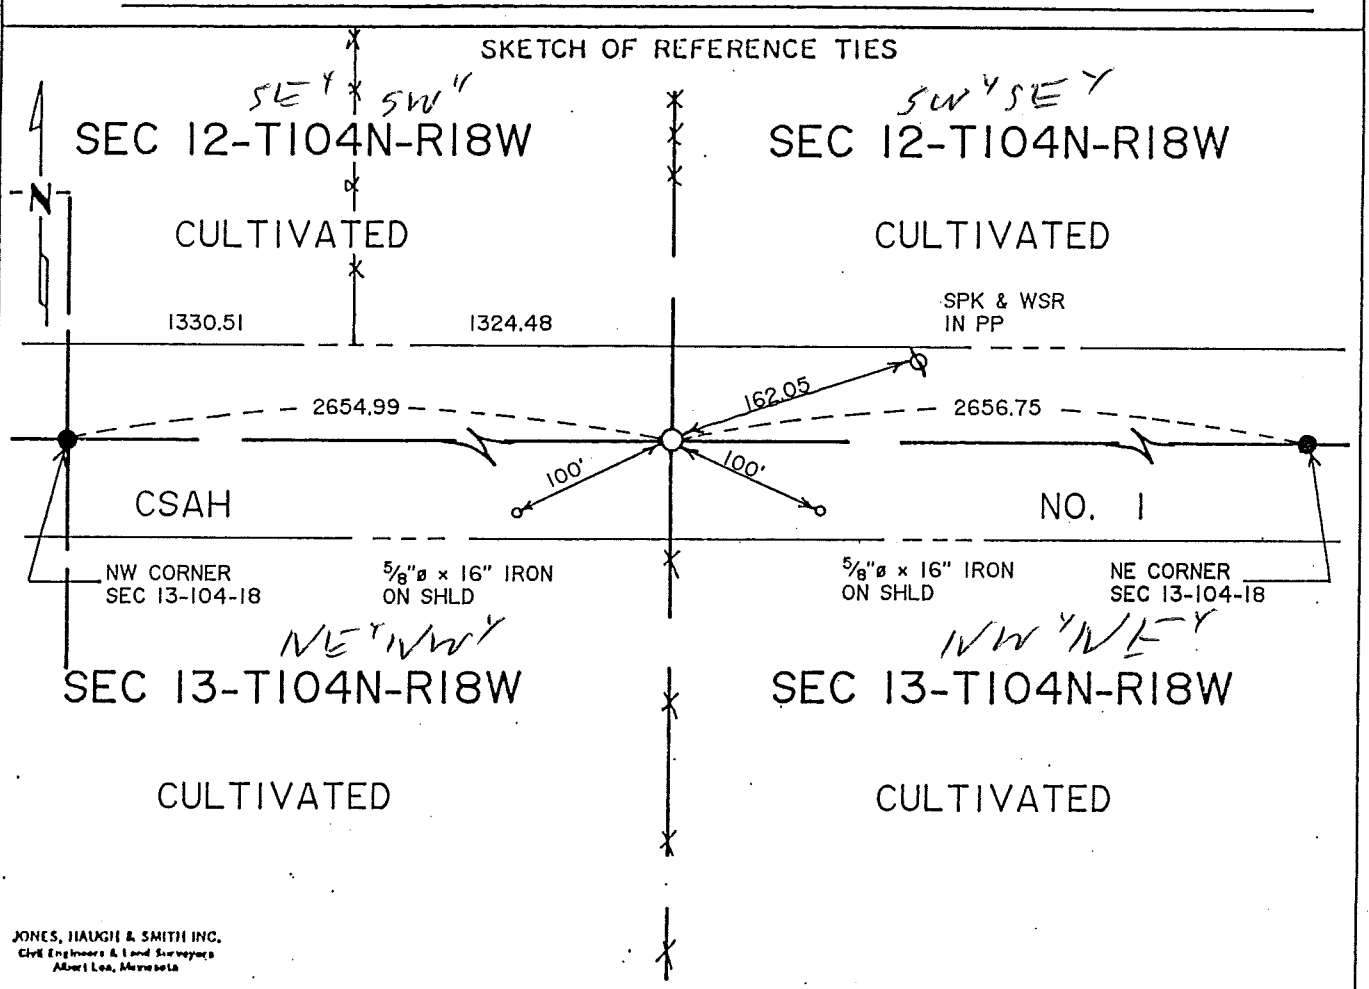

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] 6-18 93
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4 P.M. on the 24 day of June A.D., 19 93

COUNTY RECORDER Grantel Engen

By Marlene Martin, Deputy

DOCUMENT NO. 421719

Bk 80 Misc Pg 117

M.H.D. FORM NO. 2105 BOOK 80 PAGE 117

STATEMENT OF EVIDENCE

N 1/4 corner Section 13-104-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench. The following tie was taken:

6" Burr Oak	South	140 links (92.40 ft)

The following were contacted for section corner information:

Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of a perpetuation of the original public land survey corner.

1992 Jones, Haugh & Smith Inc crew, under the direction of John H. Schulte, dug with the county backhoe and found no evidence of public land survey corner or a perpetuation thereof. Therefore established position of corner using obliterated methods on a straight line between the northwest and northeast section corners in line with fences north and south.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public
land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 13 Township 104 Range 18W 5th P.M.

STATE OF MINNESOTA. County of MOWER


At the corner location shown on the sketch:

☒ On 4-19-1995 (DATE) found a 24"LONG GRANITE STONE WITH A 6"X6" SHAPED TOP

____ left monument as found ____ lowered monument X removed monument

☒ On 4-19-1995 (DATE) placed a 24" TELSPAR WITH CAST IRON CAP AT SAME LOCATION AS FOUND STONE

SKETCH OF REFERENCE TIES

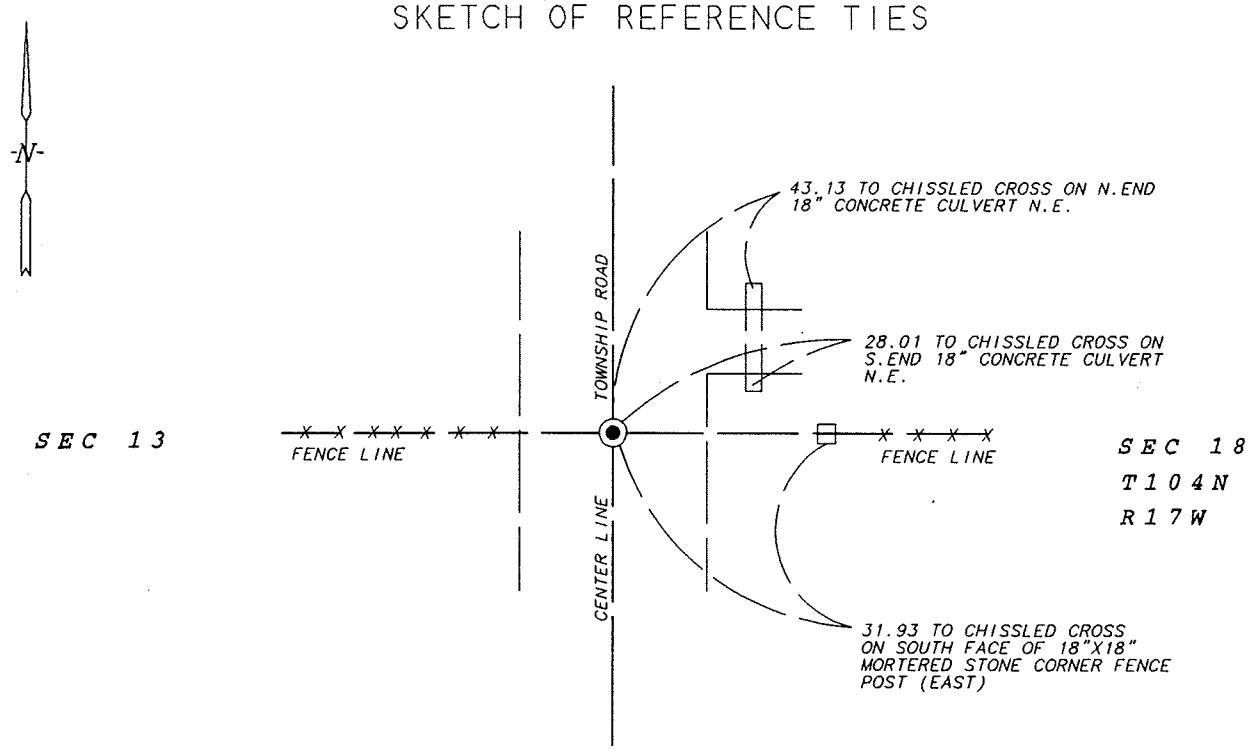

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Vincent A. Fangman
Licensed Land Surveyor
Minnesota Registration No. 14888

4/19/1995
Date.

FANGMAN LAND SURVEYING Pine Islands MINNESOTA

OFFICE OF THE COUNTY RECORDER
County of MOWER

I herby certify that this document was filed in Co. Recorder's office at _____ .M. on the _____ day of _____ A.D. 19

County Recorder _____

By _____ .Deputy

DOCUMENT NO. _____

Statement of Evidence:

East Quarter Corner Section 13, T104N, R18W

April 19, 1995 Vince Fangman, private land surveyor, dug with backhoe at the center of the north-south road and in line with fences east and west. A large granite stone was found 2 feet below the road surface. The stone was layed on its side and moved slightly southeast of its true position to make room for the permanent metal monument. The distance to the northeast corner is 2651.98 and the distance to the occupation at the southeast corner of section 13 is approximately 2655. This corner is being accepted as the public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 13, Township 104N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 08/31/1995 (DATE) found a CORNER FENCE POST

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 08/31/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

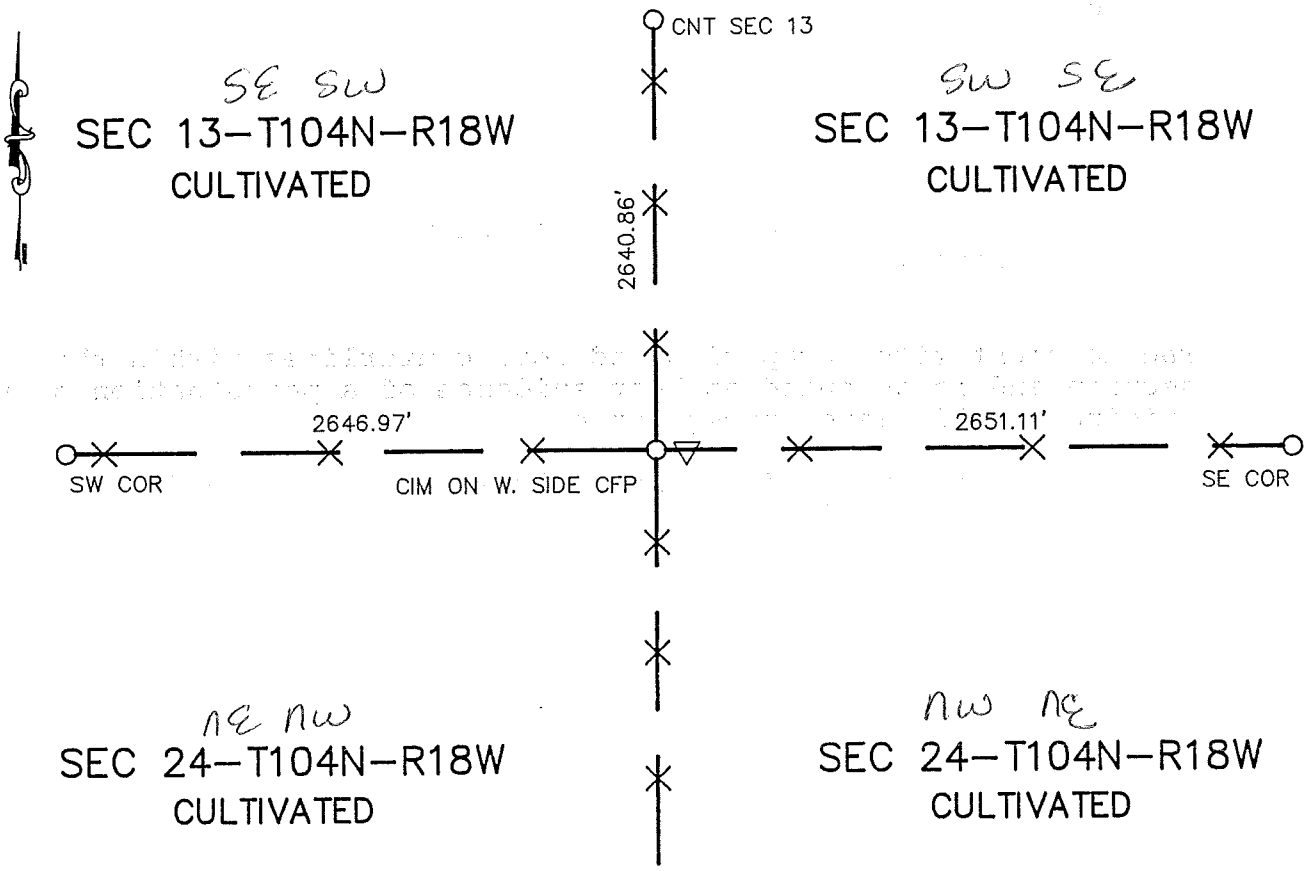

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 3-13-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 9 a.M. on the 15th day of March A.D., 1996

COUNTY RECORDER Charles Engel
By Wayne Taylor, Deputy
DOCUMENT No. 431134

M.H.D. FORM NO. 2105

BOOK 90 PAGE 421

Book 90 Page 421

S 1/4 Cor SEC 13-104-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1988 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, searched in area of fence intersection near a wood fence post with metal locator and shovel. No evidence was found of the original PLS corner and the wood post was accepted as best evidence of the corner. A 5/8" iron with cast iron head was placed on the west side of the post.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 14, Township 104N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 08/31/1995 (DATE) found a ROCK PILE IN LINE WITH FENCES N-S, E-W

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 08/31/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

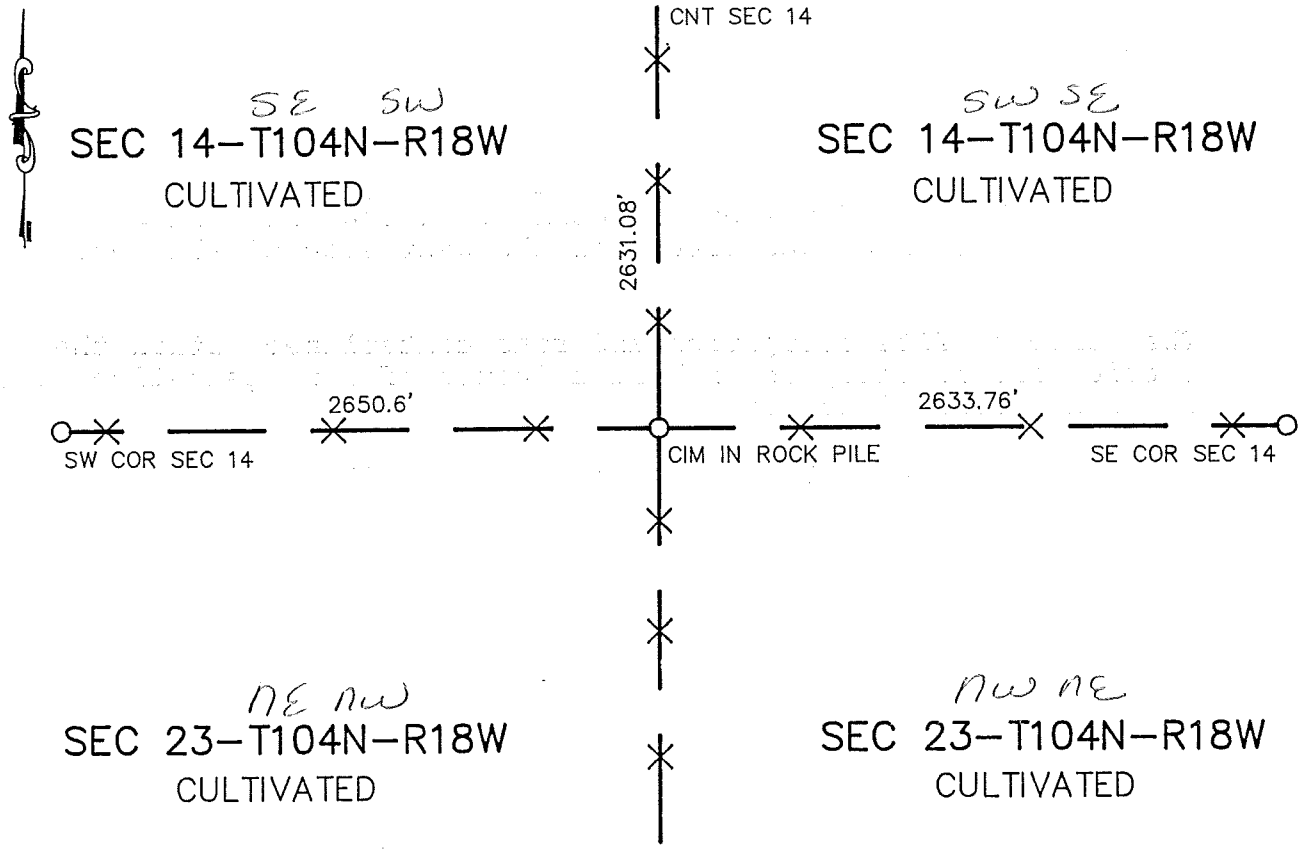

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 3-13-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 9 a.M. on the 15th day of March A.D., 1996

COUNTY RECORDER Charles Enger

By Sheryl Taylor, Deputy

DOCUMENT NO. 143135

M.H.D. FORM NO. 2105 BOOK 90 PAGE 423

Book 90 Page 423

S 1/4 Cor SEC 14-104-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1988 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, searched in area of N-S-E-W fence intersection with metal locator and shovel. Fence intersection lies under 10' rock pile. No further evidence of the original PLS corner was found. A 5/8" iron with cast iron head was set in the rock pile in line with fences.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 14, Township 104N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 10-9-92 (DATE) found a NOTHING

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6-12-93 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

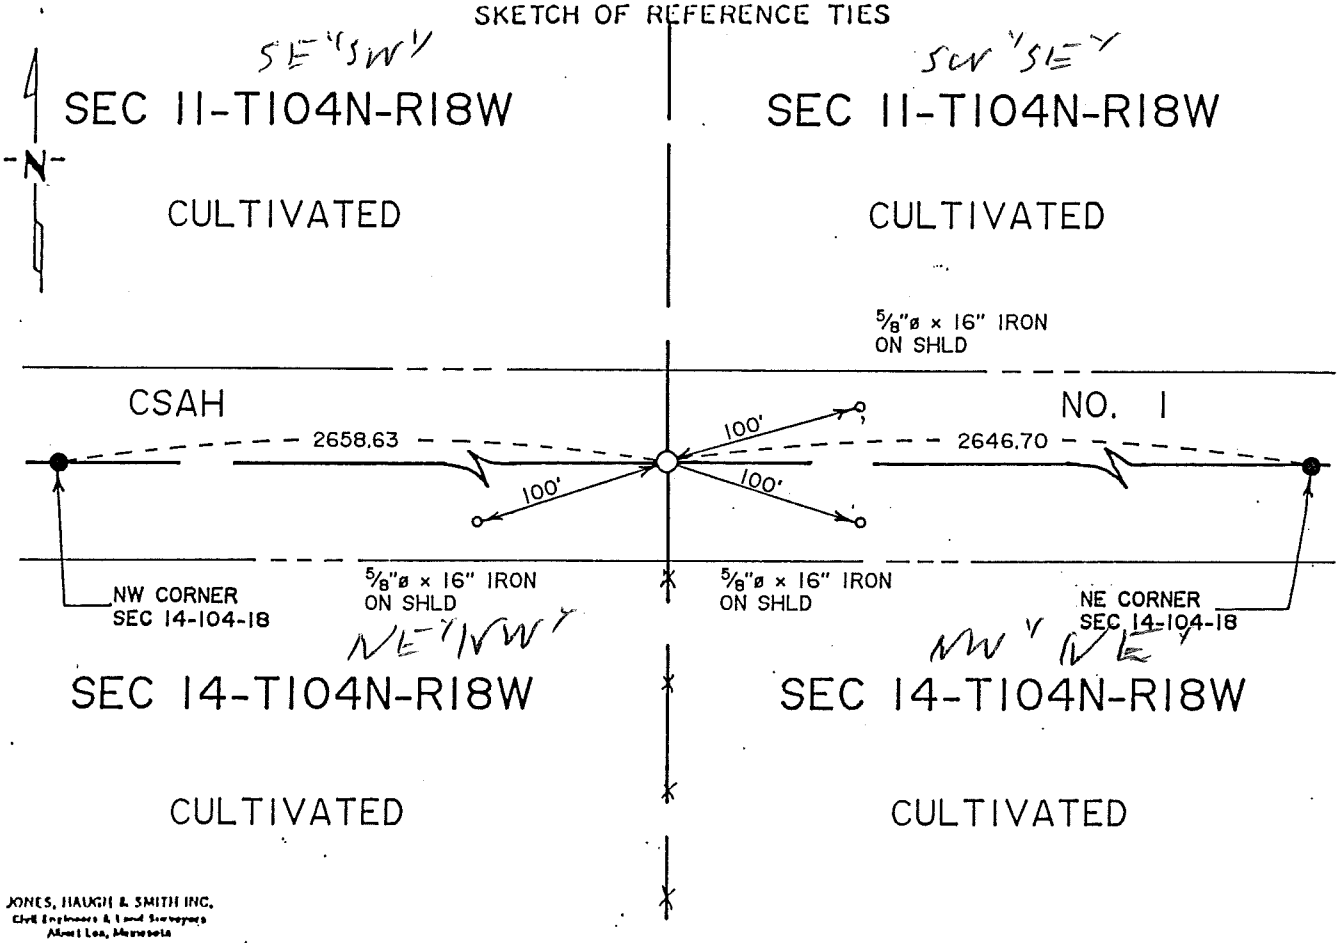

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-10-93

Registration No. 13907

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4 P.M. on the 24 day of June A.D., 1993

COUNTY RECORDER Edward Enger

By Marlene Marten, Deputy

DOCUMENT NO. 421718 Bk 80 Misc Pg. 115

M.H.D. FORM NO. 2105

Bk 80 Page 115

STATEMENT OF EVIDENCE

N 1/4 cor Sec 14-104-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

6" Burr Oak	S 25° W	83 links (54.78 ft)
7" Burr Oak	N 57° E	90 links (59.40 ft)

The following were contacted for section corner information:

Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of the perpetuation of the original public land survey corner.

1992 Jones, Haugh & Smith crew under the direction of John H. Schulte IV, Reg No. 13807, dug with the County backhoe on centerline of County State Aid Highway No. 1 and in line with line fence running south and found no evidence of a perpetuation of this corner or the original public land survey corner.

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, RLS 13807, set this corner on a straight line between the northwest and northeast corners of Section 14 and also in line with the line fence running south.

The monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. P 76 "C"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 14, Township 104N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 10-9-92 (DATE) found a 6"ø CONCRETE MONUMENT WITH ½"ø IRON CAST IN CENTER

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10-9-92 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

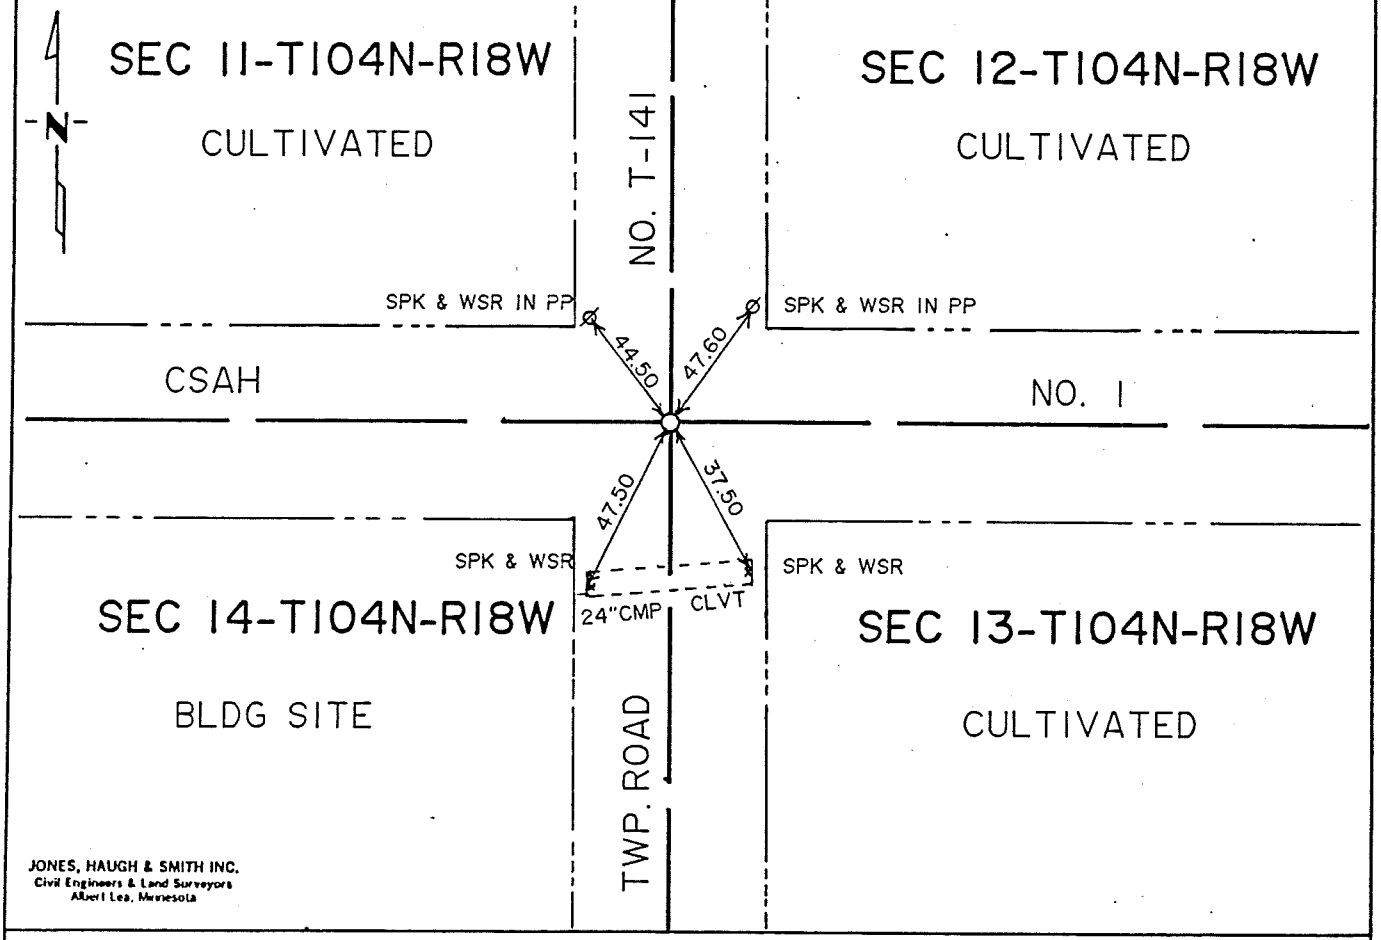

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 11-12-92 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NE corner Section 14-104-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench. The following tie was taken:

8" Burr Oak	S 59 1/2° W	247 links (163.02 ft)

The following were contacted for section corner information:

Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1941 Recorded in Book 'A' in the office of the Mower County Engineer, a monument was uncovered and the following ties were taken:

N to REA pole	30.6 ft
SW to Maple	57.7 ft
N to fence west	36.5 ft
NE to PP	47.2 ft
NW to CFP	44.0 ft
NW to guy pole	44.0 ft
W to fence line	24.8 ft

1992 Jones, Haugh & Smith Inc crew, under the direction of John H. Schulte, dug with the county backhoe and uncovered a 1/2" diameter iron cast in center of 6" diameter concrete monument three feet below road surface in virgin soil. Tie to the face of power poles NW and NE agree with 1941 records. Set cast iron monument over concrete monument on road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public
land survey corner.