Index No. P 76 "E"

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 14, Township 104N, Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 12-8-88 (DATE) found a 3/8" dia. iron in a 6" dia. concrete monument

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 12-8-88 (DATE) placed a 5/8"ϕ x 16" iron capped RLS 13807 on south side of concrete monument

SKETCH OF REFERENCE TIES

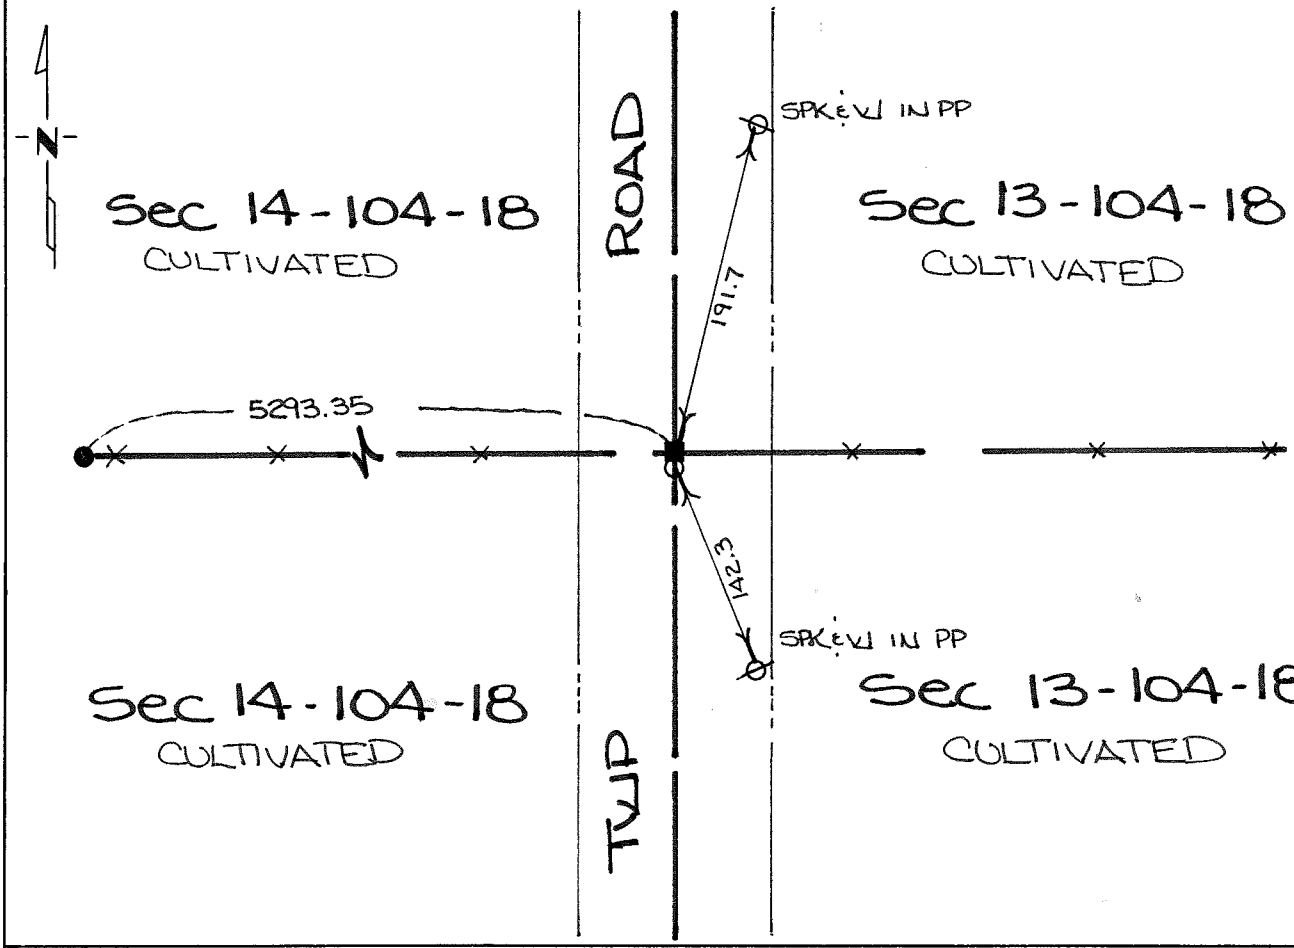


Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 12-12-88 DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE
E¼ corner Section 14-104-18

1854 William I. Anderson, Deputy Surveyor of the US General Land Office set a wood post and took ties to the following bearing trees:

| | | |
|---|---|---|
| 11" Burr Oak | S 02° 3/4 E | 384 Links |
| 12" Burr Oak | S 06° 3/4 W | 295 Links |

No further evidence was obtained from County or private records of ¼ corner.

1988 Jones, Haugh & Smith crew uncovered a 6" diameter concrete monument in clay tile with a 3/8" diameter iron cast in center of monument on centerline of north-south road and in line with fence east-west.

The monument found fits occupation and road centerlines within the section and has been accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact firm of Jones, Haugh & Smith

Index No. P76 "A"

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 14, Township 104N, Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 12-8-88 (DATE) found a 1/2" dia. iron in a 6" dia. concrete monument

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 12-8-88 (DATE) placed a 5/8"ϕx16" iron over a concrete monument

SKETCH OF REFERENCE TIES

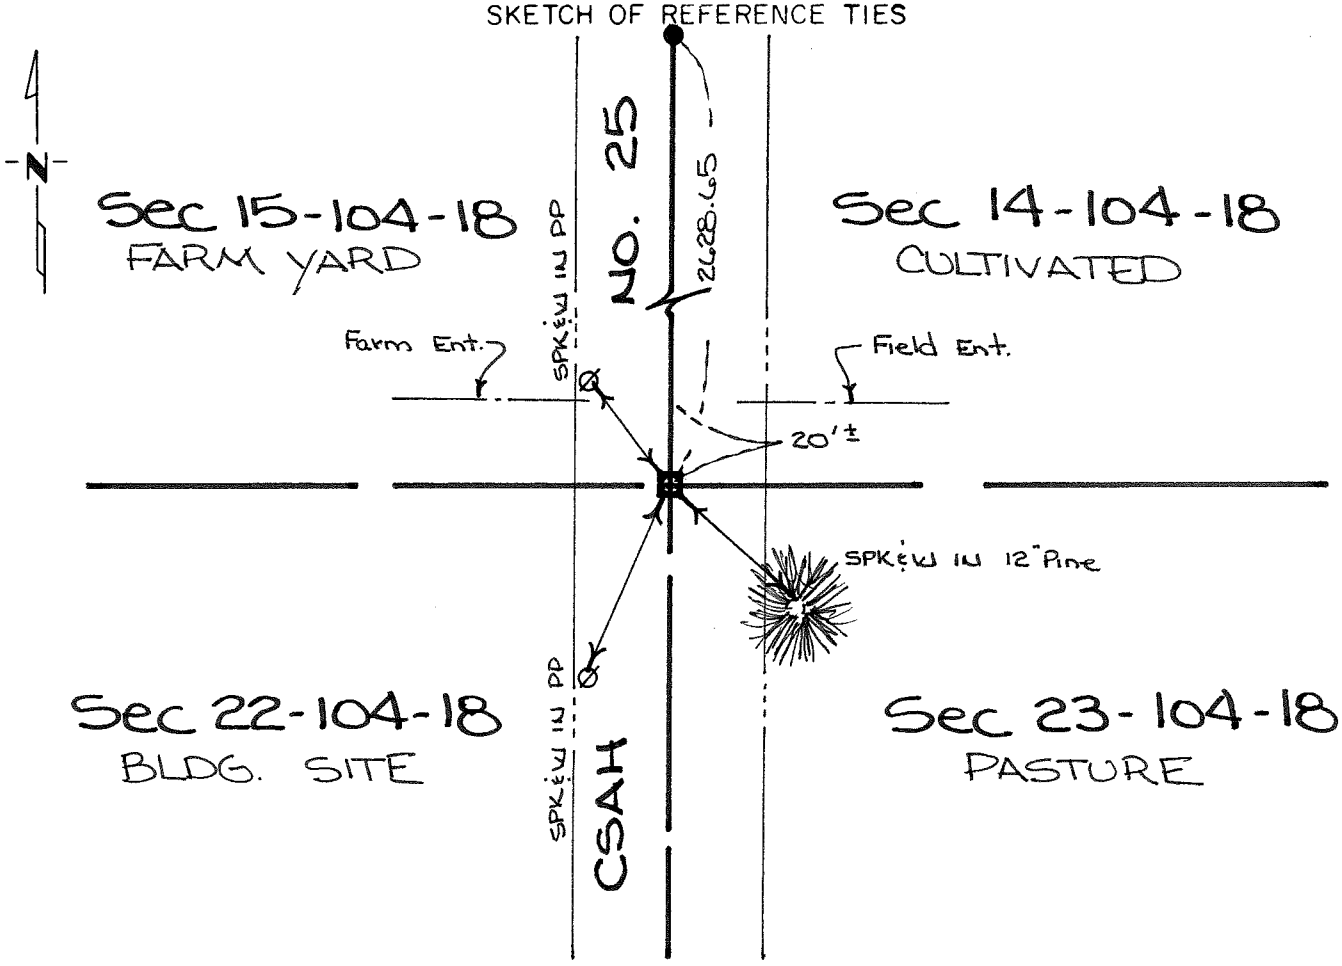


Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] 12-12-88
SIGNATURE DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 __

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE
SW corner Section 14-104-18

1854 William I. Anderson deputy surveyor of the US General Land Office set a wood post and took ties to the following bearing trees:

| | | |
|---|---|---|
| 10" Burr Oak | N 70° W | 20 Links |
| 12" Burr Oak | N 12° E | 175 Links |
| 13" Burr Oak | S 27° W | 153 Links |

1935± Mower County Engineering Department uncovered a concrete monument as shown on grading plan and ties were taken and recorded in the County Tie Book.

1950± Mower County Engineering Department uncovered a concrete monument as shown on grading plan, no new ties were taken.

1988 Jones, Haugh & Smith crew uncovered a 6" diameter concrete monument in a clay tile with a ½" diameter iron in center of monument on the centerline of north-south road.

The monument found fits occupation and road centerlines within the section and agrees with past records from the Mower County Highway Department and has been accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact firm of Jones, Haugh & Smith

16 "F"

Index No. 9

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 14, Township 104N, Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 12-8-88 (DATE) found a NO EVIDENCE OF CORNER

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 12-8-88 (DATE) placed a 5/8"Ø IRON CAPPED RLS 13807

SKETCH OF REFERENCE TIES

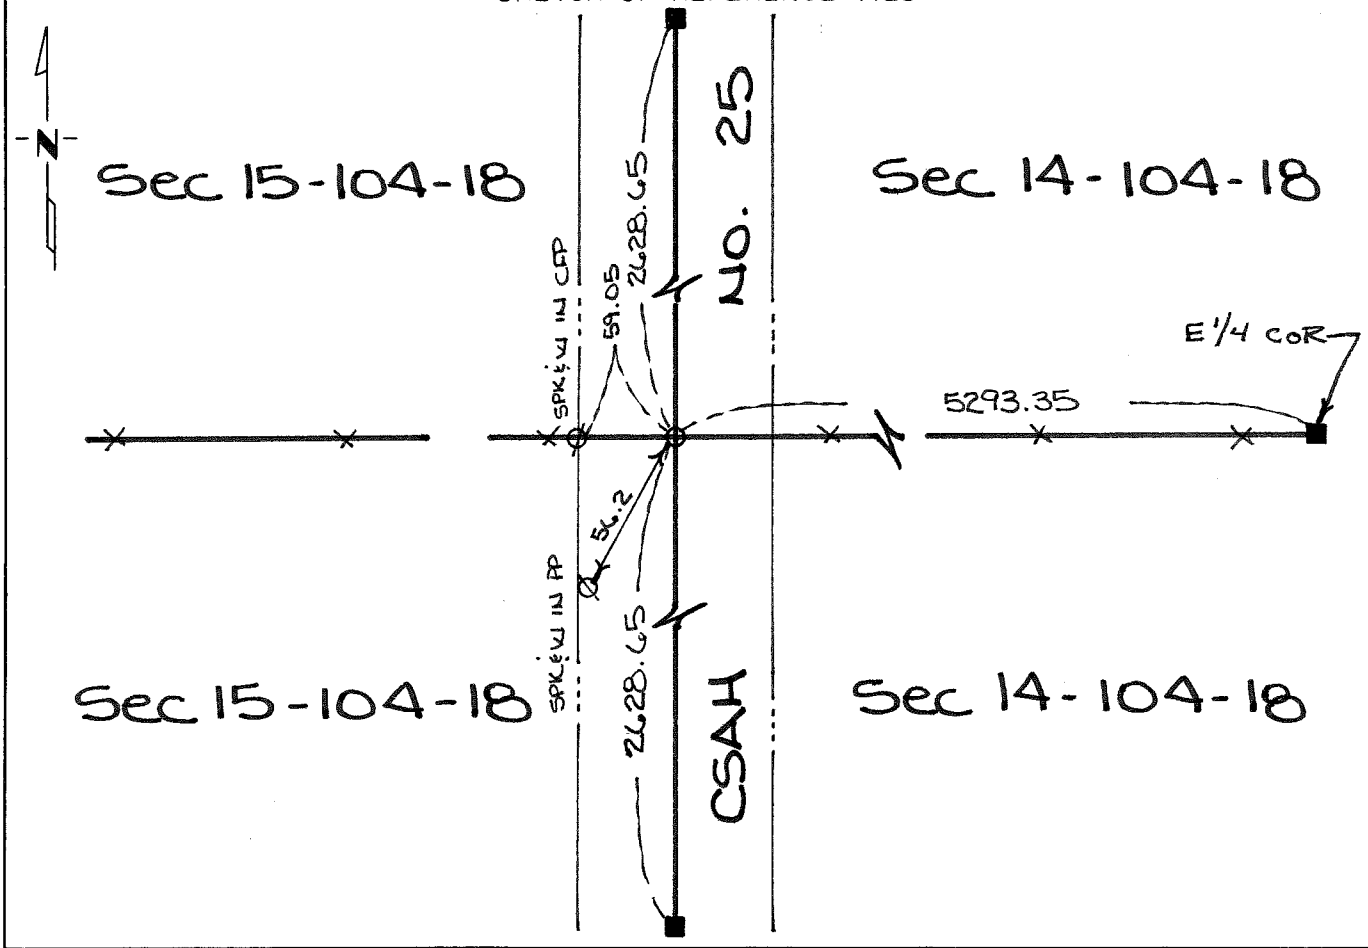


Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 12-12-88 DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE
W¼ corner Section 14-104-18

1854 William I. Anderson, Deputy Surveyor of the US General Land Office set a wood post and took ties to the following bearing trees:

6" Burr Oak S 20° W 68 Links
13" Burr Oak 307 Links North

1935± Mower County Engineering Department indicates no monument was uncovered during 1935 grading project, at the time of the grading project there was a township road on the assumed ¼ line going west from ¼ corner. Distance from northwest corner to centerline township road was 2628.5 feet.

1950± Mower County Engineering Department regraded county road and shows no evidence of ¼ corner and at this time township road to the west has been removed.

1988 Jones, Haugh & Smith crew found no evidence of public land survey corner or a perpetuation thereof. Therefore established position of ¼ corner using obliterated methods setting a 5/8" diameter iron on a straight line at the midpoint between the northwest corner and southwest corners of Section 14-104-18.

The monument set fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact firm of Jones, Haugh & Smith

Index No. P 76"8"

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 14, Township 104N, Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 12-8-88 (DATE) found a 1/2" dia. iron in a concrete monument

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

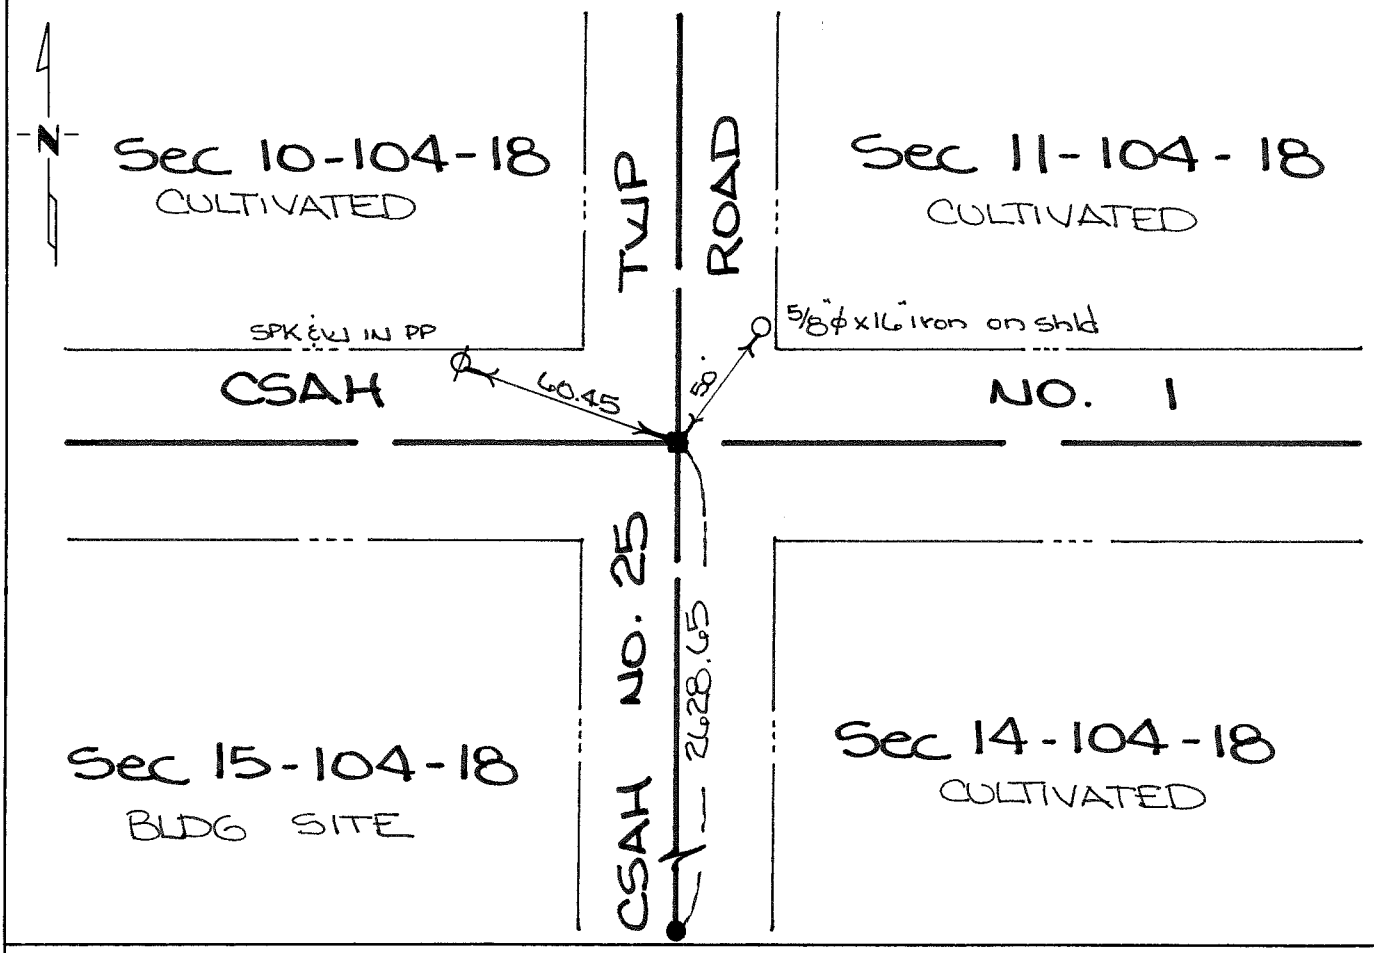


Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 12-12-88

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE
NW corner Section 14-104-18

1854 William I. Anderson deputy surveyor of the US General Land Office set a wood post and ties were taken to the following bearing trees:

| | | |
|---|---|---|
| 7" Burr Oak | S 63° E | 290 Links |
| 8" Burr Oak | S 80° W | 466 Links |

1935± Mower County Engineering Department grading plan shows a concrete monument inplace and ties were taken and recorded in the tie book.

1950± Mower County Engineering Department grading plan shows a concrete monument inplace, no new ties were taken.

1988 Jones, Haugh & Smith crew uncovered a 6" diameter concrete monument in clay tile with ½" diameter iron cast in center of monument.

The monument found fits occupation and road centerlines and agrees with records from the Mower County Engineering Department and has been accepted as a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact firm of Jones, Haugh & Smith