Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 20, Township 104N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-29-90 (DATE) found a 1"Øx1.5' iron bar 2.5' north of E-W road centerline in line with fence N-S.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

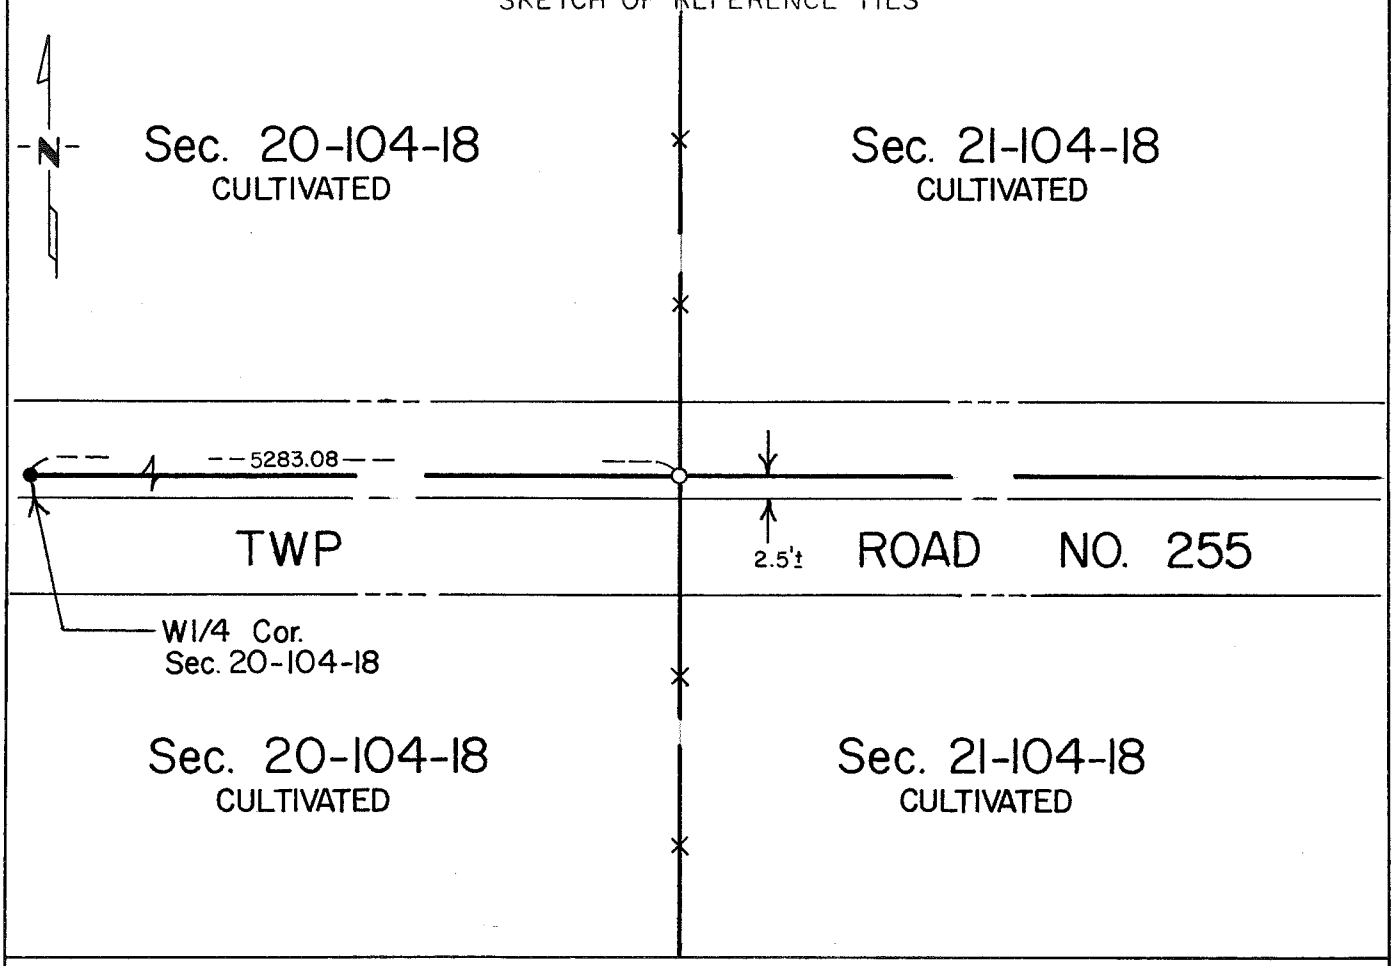

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-18-90

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

E 1/4 corner Section 20-104-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show this corner was marked with a charred stake with a trench and a mound of earth.

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorder's Office

1990 Jones, Haugh & Smith crew dug with a jackhammer in line with fences north-south. Found 1" diameter iron bar 1.5 feet long 2.5 feet north of centerline of east-west road. Left monument as found.

Corner found fits occupation lines and is accepted as best evidence and perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 20, Township 104N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-29-90 (DATE) found a 1/2"Ø square iron in concrete 2.5' below road surface.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-29-90 (DATE) placed a capped 5/8"Ø (13807) iron over monument found.

SKETCH OF REFERENCE TIES

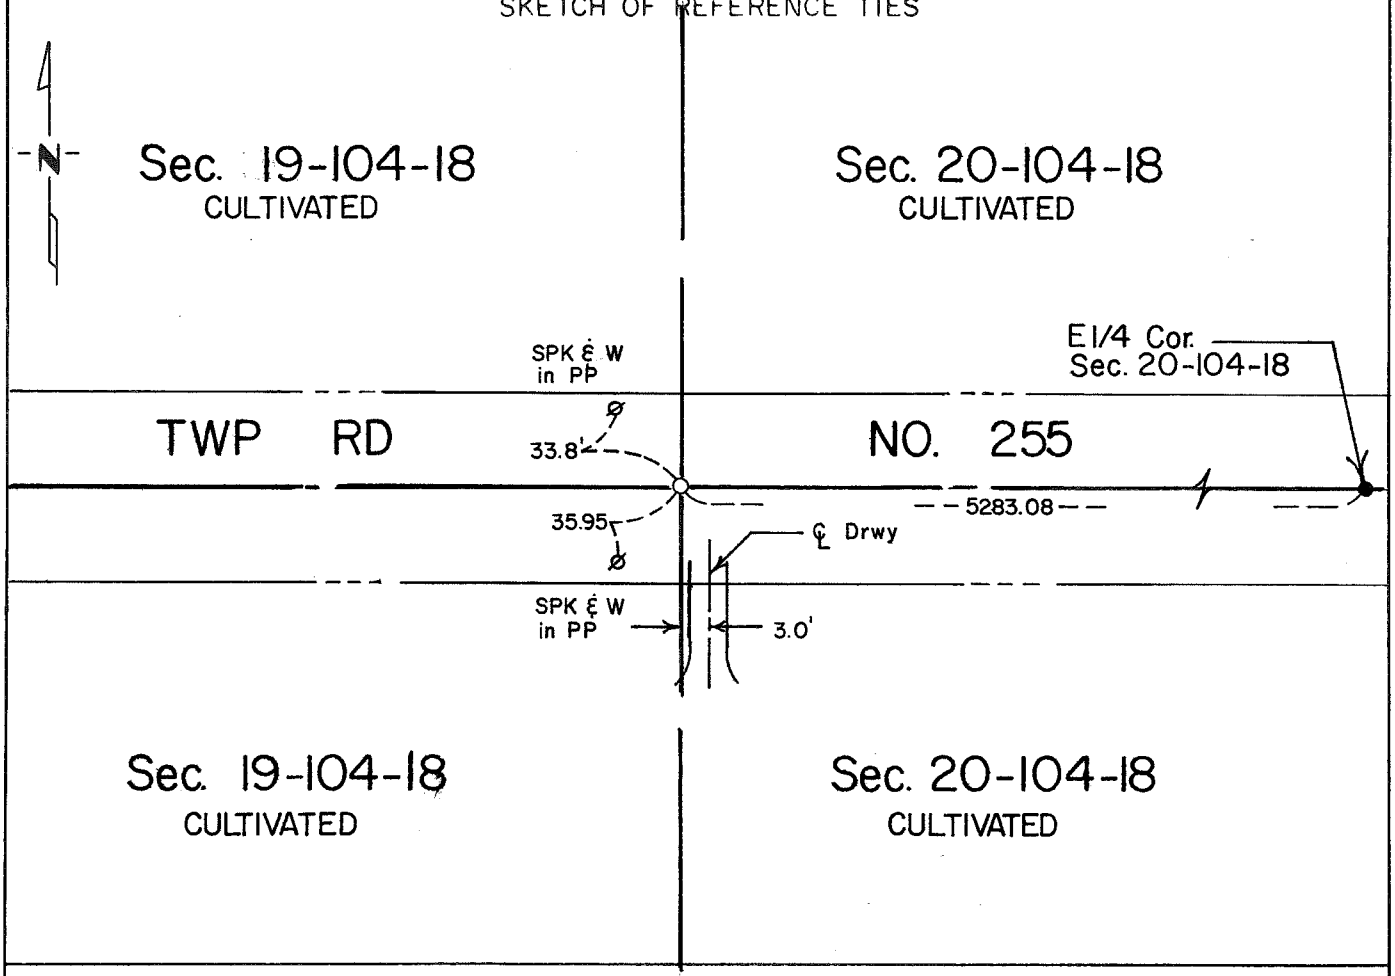

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-17-90

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Section 20-104-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show this corner was marked with a charred stake with a trench and a mound of earth.

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorder's Office

1990 Jones, Haugh & Smith crew dug with a jackhammer on centerline in line with fences north-south. Found 1/2" square iron in concrete 2.5 feet below road surface. Placed a capped 5/8" diameter iron over monument found.

Corner found fits occupation lines and is accepted as best evidence and perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 20, Township 104N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/09/1996 (DATE) found a WOOD POST

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 05/09/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

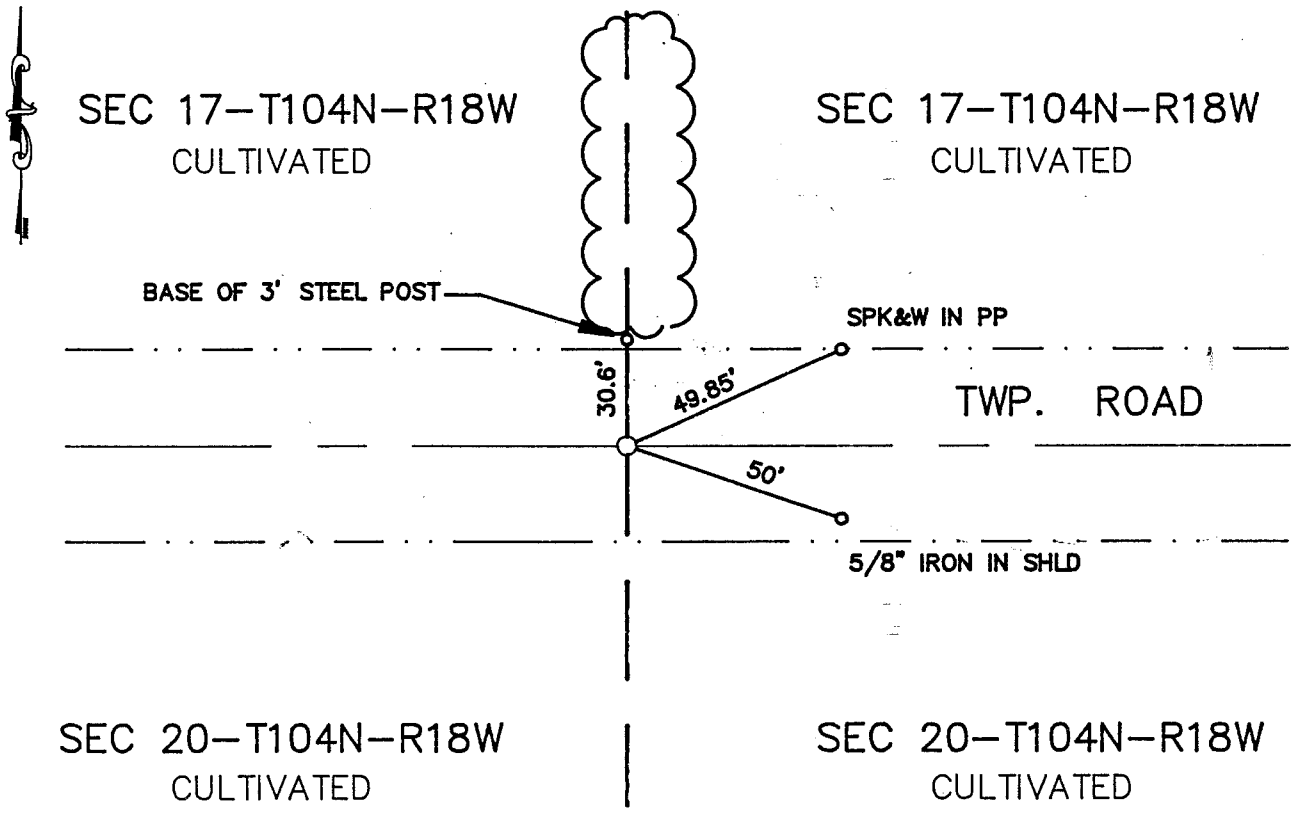

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-20-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of Mower

I hereby certify that this document was filed in the County Rec. office at 10 A.M. on the 23 day of June A.D., 19 97

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. 454030

M.H.D. FORM NO. 2105

BOOK 83 PAGE 385

N 1/4 Cor SEC 20-104-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of township road E-W and in line with line fence north. Uncovered a wood post 2' below road surface. Continued digging by hand and found no further evidence of original PLS corner. Accepted post as true corner. Placed a capped 5/8" iron #13807 in the center of post. Placed cast iron monument over post found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 21, Township 104N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 10/17/1995 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10/17/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

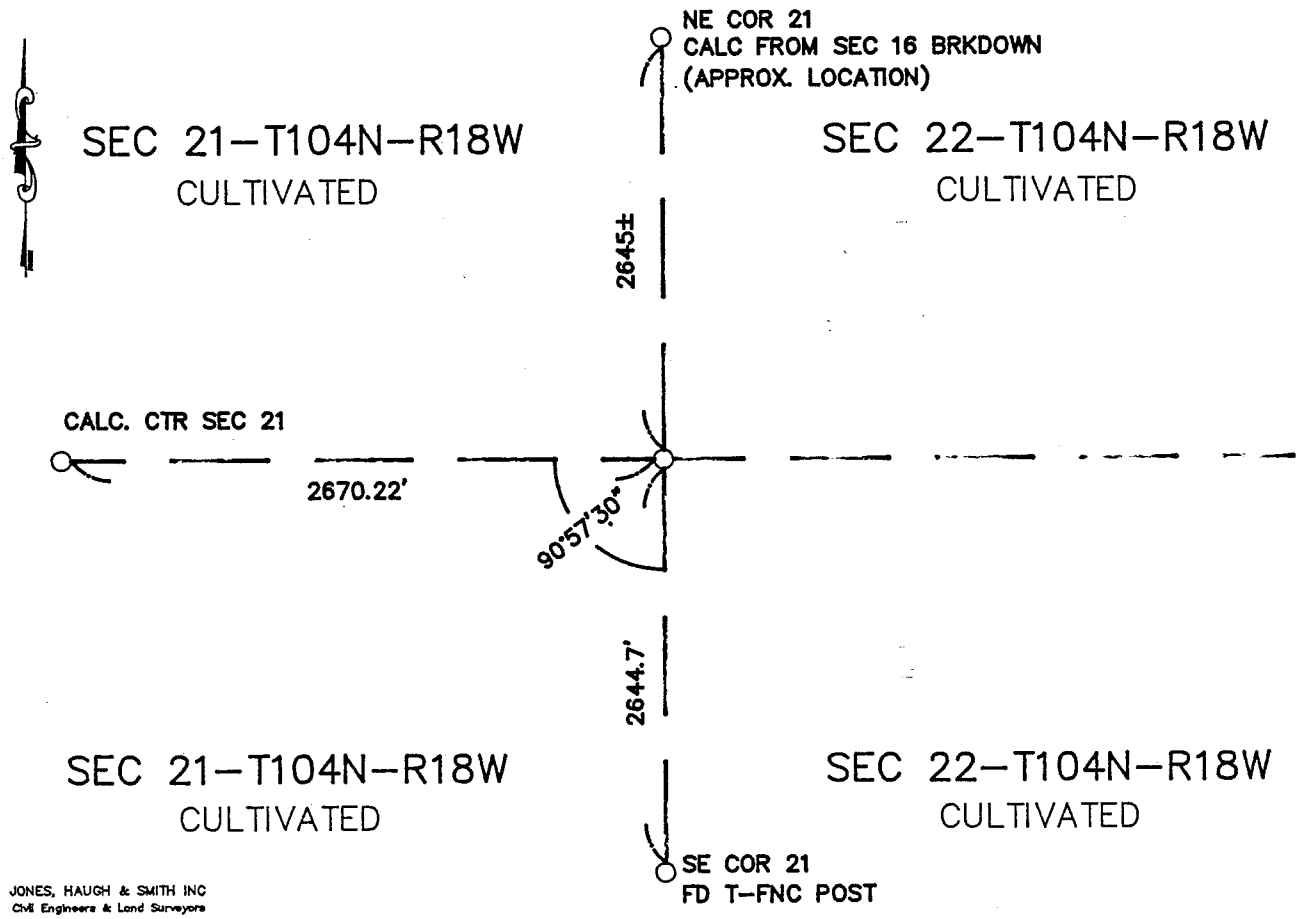

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-20-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 10 a .M. on the 23 day of June A.D., 1997

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. 454031

M.H.D. FORM NO. 2105

BOOK 35 PAGE 385

E 1/4 Cor SEC 21-104-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, searched with magnetic locator at the intersection of fence lines N-S and E-W. Located no evidence of original PLS corner. Corner is tilled in field. Placed a cast iron monument on a straight line midway between the NE and SE section corners.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 22, Township 104N, Range 18W, 5 P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

On 7-10-90 found STONE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

On 7-11-90 placed 3/4" REBAR AND COUNTY CAP OVER STONE

SKETCH OF REFERENCE TIES

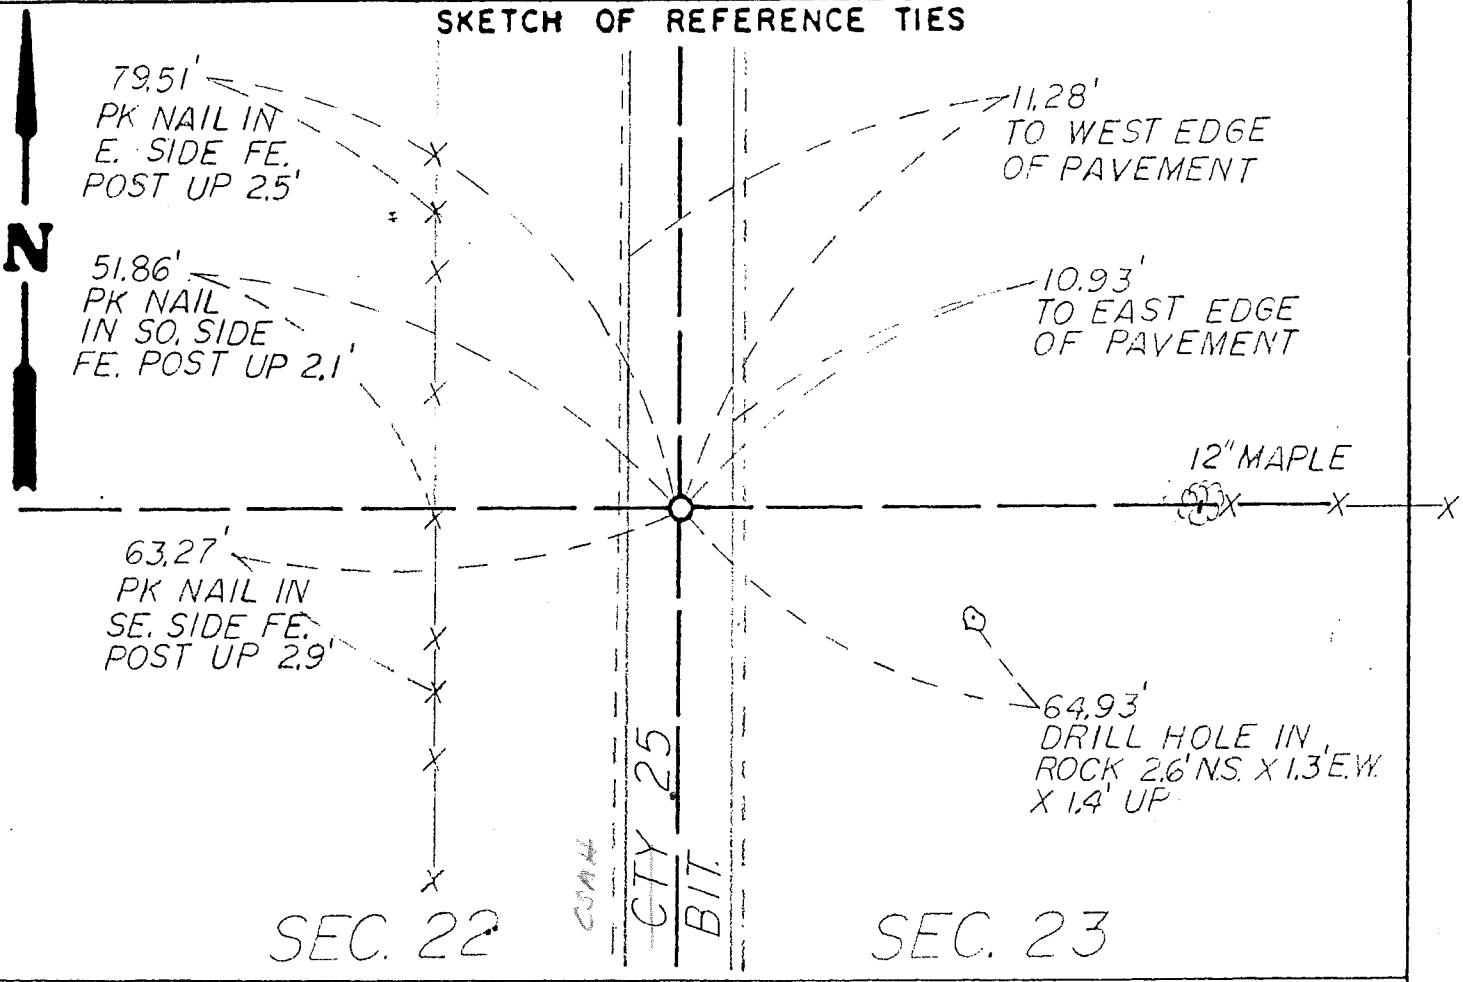

Statement of evidence relative to this corner location is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald J. Olson — Signature
7-13-90 — Date

Registration No. 11009

☒ Land Surveyor ☐ Prof Engineer
☐ County Surveyor ☐ County Engineer

Zenk•Read•Trygstad & ASSOCIATES, INC.
Engineers / Architects / Land Surveyors / Planners
Box 689, Albert Lea, MN 56007 507/373-0689

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____ .M. on the ____ day of _____ A.D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

EAST QUARTER CORNER SECTION 22, TOWNSHIP 104 NORTH, RANGE 18 WEST, 5TH P.M.

July, 1854 — William Anderson, Deputy Surveyor, set a post at the corner during the original Public Land Survey.

1936 — County Engineers Road Plans show section line crossing at Station 205+31.

1962 — County Engineers Road Plans show a concrete monument inplace.

July 6, 1990 — Zenk Read Trygstad & Associates excavated 4.5 feet deep 2 feet East to 2 feet West of centerline and 4 feet south to 8 feet North of fence to the East.

A stone was found 3.3 feet below the surface in mottled soil, and a 1/2 inch pipe and cap # 11009 was set on the Northwest side of the stone at the time of excavation.

An analysis of the record data gives no indication of the origin of the stone. The concrete monument over the stone shows the County has used the stone as the corner. Similar stones have been found at other corners in the area and is accepted as marking the location of the corner of the original Public Land Survey.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 25, Township 104N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 2-8-93 (DATE) found a ½"ø IRON CAST IN A 6"ø CONCRETE MONUMENT 1.5' DEEP

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 2-8-93 (DATE) placed a CAST IRON MONUMENT OVER CONC. MON.

SKETCH OF REFERENCE TIES

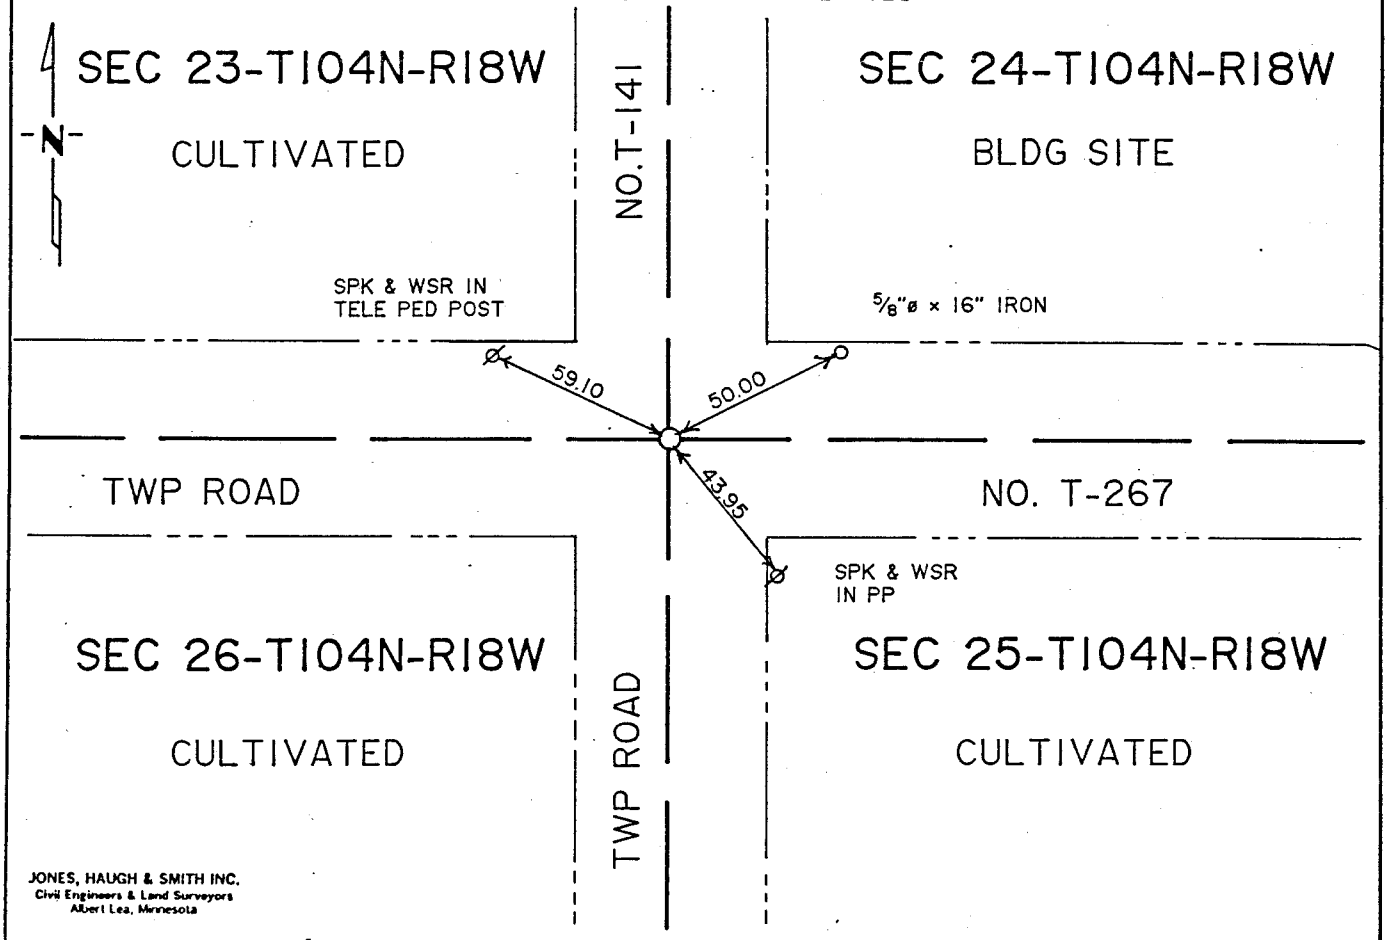

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] 2-12-93
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW cor Sec 25-104-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench. The following ties were taken:

10" Burr Oak	S 34°E	690 links (455.40 ft)
8" Burr Oak	N 9°E	1255 links (828.30 ft)

The following were contacted for section corner information:

Mower County Highway Department
Mower County Recorder's Office
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of the original public land survey corner:

1885 Clausen, Mower County Surveyor, field notes indicate a government post was found.

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, dug on centerline centerline north, south, east and west township roads and uncovered a 1/2" diameter iron cast in 6" diameter concrete monument 1.5 feet deep. We accepted concrete monument as best evidence of the perpetuation of the original public land survey corner and set cast iron monument near road surface above concrete monument.

The monument found fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic distances, angles and further analysis, contact Jones, Haugh & Smith Inc.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 27, Township 104N, Range 18W, 5 P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

On 7-6-90 found STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

On 7-11-90 placed A COUNTY CAP ON A 5/8" ROD OVER STONE

SKETCH OF REFERENCE TIES

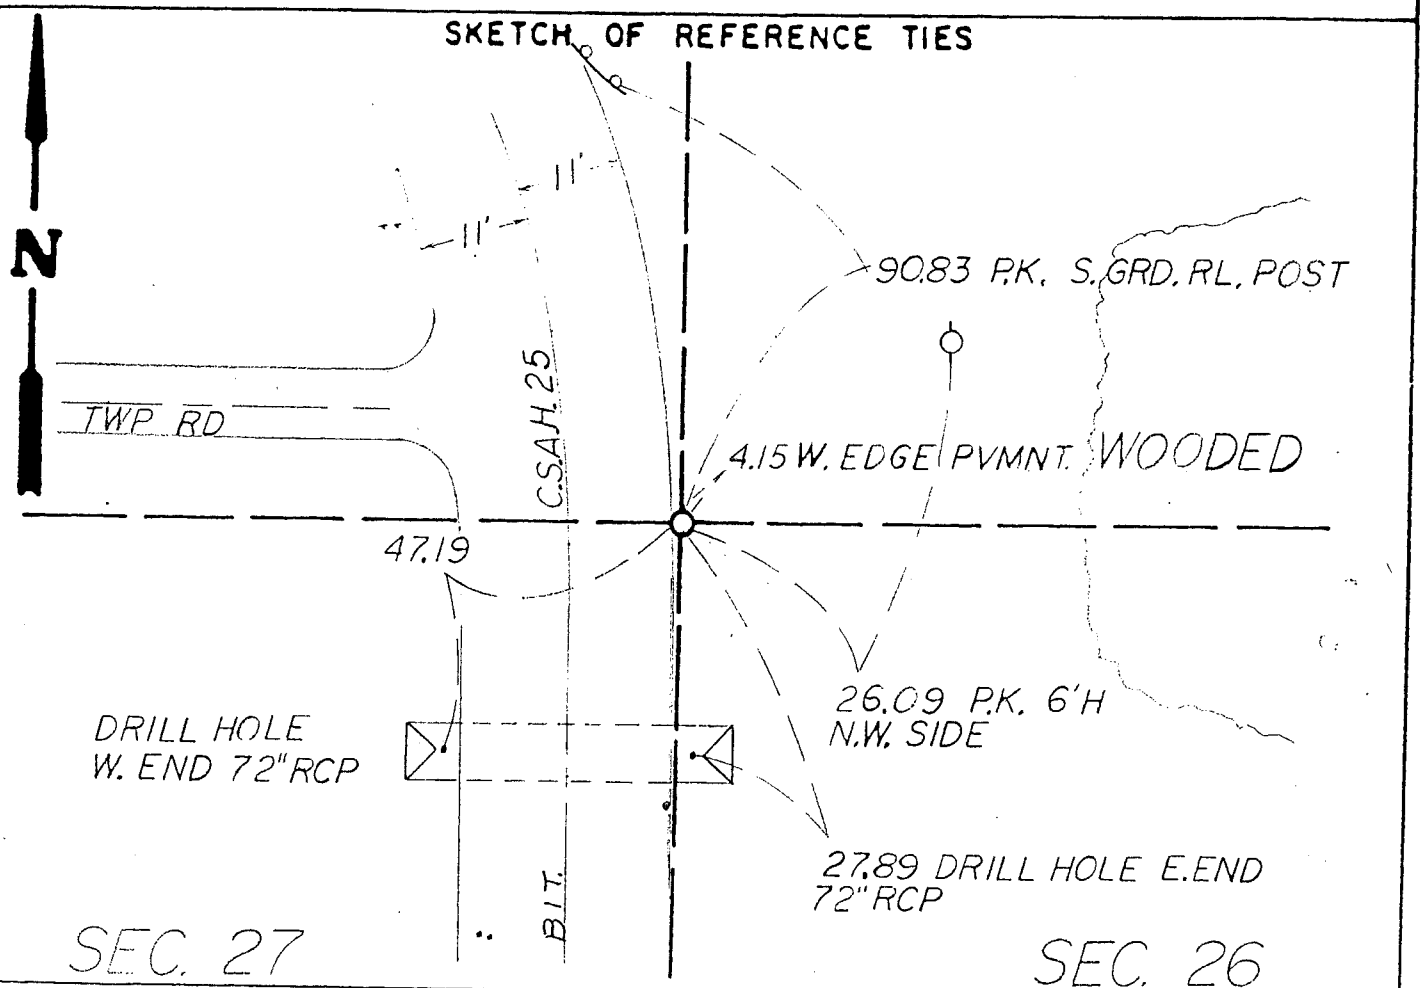

Statement of evidence relative to this corner location is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald J. Olson — Signature
7-13-90 — Date

Registration No. 11009

☒ Land Surveyor ☐ Prof Engineer
☐ County Surveyor ☐ County Engineer

Zenk•Read•Trygstad & ASSOCIATES, INC.
Engineers/Architects/Land Surveyors/Planners
Box 689, Albert Lea, MN 56007 507/373-0689

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____.M. on the ____ day of _____ A.D., 19____.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

EAST QUARTER CORNER SECTION 27, TOWNSHIP 104 NORTH, RANGE 18 WEST, 5TH P.M.

Aug., 1854	William Anderson, Deputy Surveyor, set a post at the corner during the original Public Land Survey.
June, 1885	Government post shown in Clausen Field notes, and used to subdivide Section 26.
1936±	County Engineers Road Plans shows section line at Station 132+10
1962	County Engineers Road Plans show a concrete Monument inplace. The centerline is shown as 12 feet West of the section line.
July 1990	Zenk Read Trygstad & Associates excavated 7 feet deep by from 12 feet to 22 feet East of Centerline by 12 feet long North to South. A stone .6 feet by .8 feet by 1.8 feet high was found 2.3 feet below the surface. A concrete monument and a nail were found above the stone.

An analysis of the record data gives no indication of the origin of the stone. Other stones of similar size have been located at corners throughout Mower Country. The stone agrees with the County Road centerline and the township road West. It is accepted as marking the location of the original Public Land Survey Corner.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 27, Township 104N, Range 18W, 5 P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

On 7-10-90 found A CONC. MON. OVER STONE, SET CONC. MON. ON W. SIDE OF STONE

☐ left monument as found, ☐ lowered monument, ☑ removed monument (explain)

On 7-10-90 placed A COUNTY CAP ON A 1/2" X 18" PIPE OVER STONE

SKETCH OF REFERENCE TIES

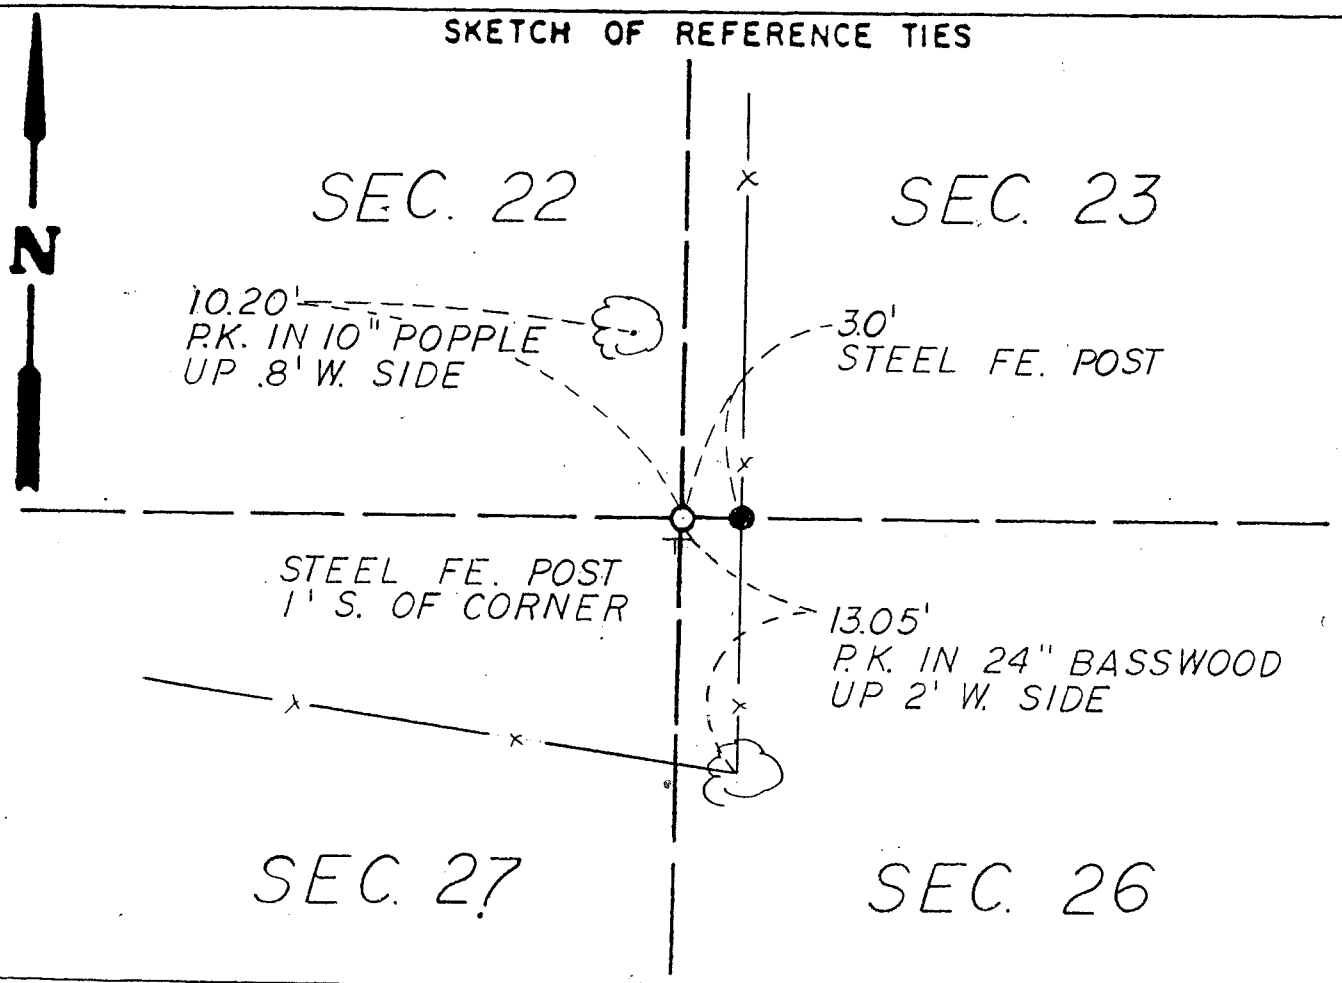

Statement of evidence relative to this corner location is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald J. Olson — Signature
7-13-90 — Date

Registration No. 11009

☒ Land Surveyor ☐ Prof. Engineer
☐ County Surveyor ☐ County Engineer

Zenk·Read·Trygstad & ASSOCIATES, INC.
Engineers / Architects / Land Surveyors / Planners
Box 689, Albert Lea, MN 56007 507/373-0689

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____ .M. on the ____ day of _____ A.D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

NORTHEAST CORNER SECTION 27, TOWNSHIP 104 NORTH, RANGE 18 WEST, 5TH P.M.

Aug., 1854 — William J. Anderson, Deputy Surveyor, set a post at the corner during the original Public Land Survey.

June 1885 — Clausen Field Notes show a government post, which as used to subdivide Section 26.

1962 — County Engineers Road Plans show a concrete monument and stone inplace.

July 1990 — Zenk Read Trygstad & Associates found a stone 1'x0.7'x0.8' high and 1.4 feet below the surface.

A concrete monument was found over the stone 0.3 feet below the surface.

An analysis of the record gives no indication of the origin of the stone. The concrete monument over the stone shows the County has used and maintained this location for 28 years. Other stones and concrete monuments have been found at corners throughout the county. The stone is accepted as marking the location of the original Public Land Survey Corner.

TIE BOOK p. 83

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 28, Township 104 N, Range 18 W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☑ On 6-20-84 (DATE) found a Painted field stone 3.7' below road surface

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☑ On 6-20-84 (DATE) placed a 5/8"ϕ x 24" iron over stone 0.3' below road surface

SKETCH OF REFERENCE TIES

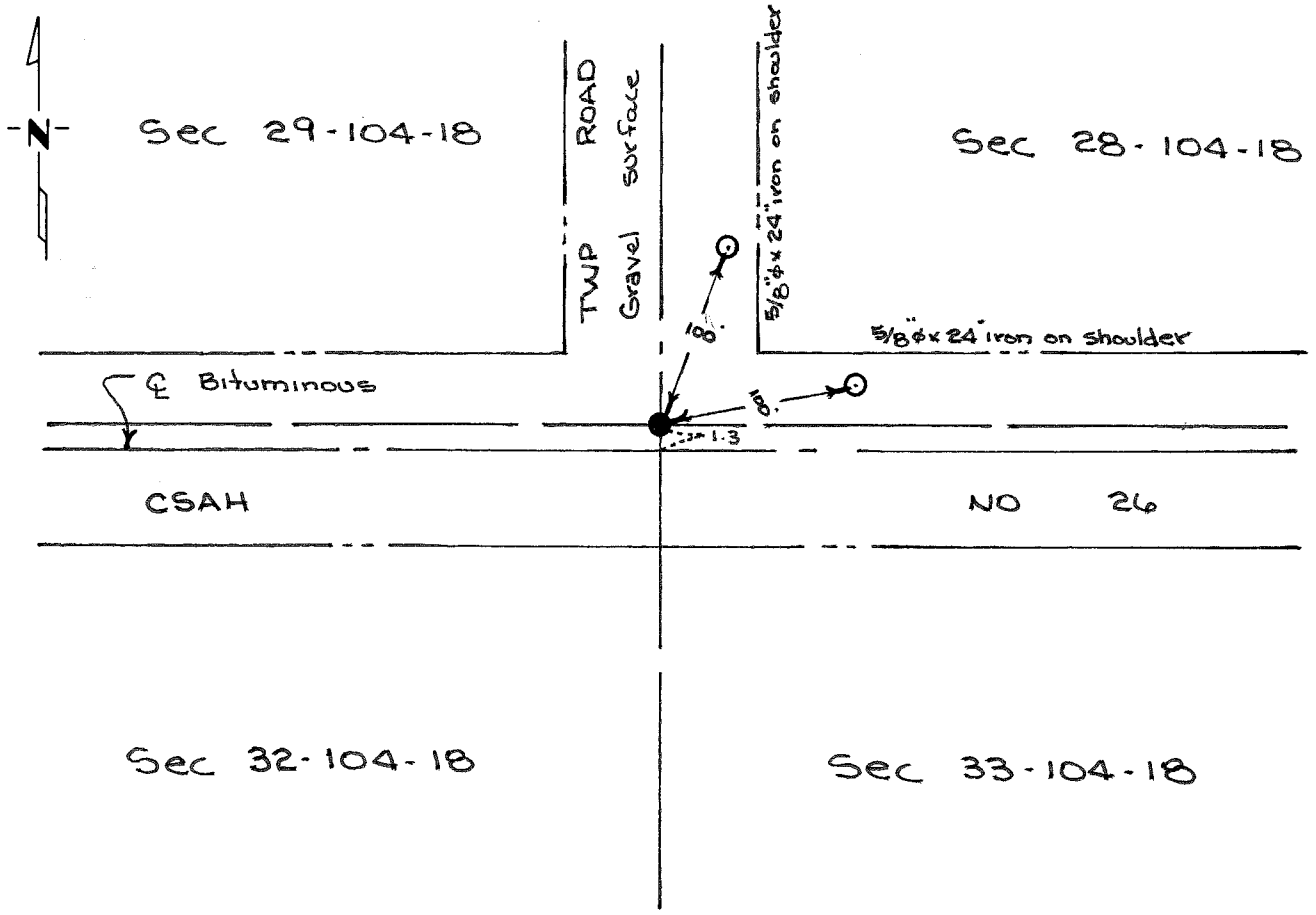

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

H. [signature] 7-19-84
SIGNATURE DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Sec 28-104-18

1854 Wm I. Anderson, Deputy Surveyor set wood post and deposited charred stake with trench and mound during public land survey.

1930± Mower County Engineering Department tie book shows a concrete monument inplace at the section corner and gives County stationing on southwest corner and southeast corner.

1984 Jones, Haugh & Smith crew dug with County backhoe and at a depth of 3.7 feet below road surface found a 16" flat pointed field stone with a 3" diameter top. Found old wood stake on the east side of stone. Placed a 5/8"ø x 24" iron over stone capped RLS 13807. (Ray Guttormson, Mower County Engineer, said that he believed the 1930± concrete monument had been destroyed by road construction.)

The stone monument found fits road centerline and occupation lines and is in agreement with distance to southeast section corner using County Highway Department stationing. The corner is accepted as a perpetuation of the public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 29, Township 104N, Range 18 W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 3-17-86 (DATE) found a cast iron monument 1.5' below road surface.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 3-17-86 (DATE) placed a cast iron monument on road surface over monument found.

SKETCH OF REFERENCE TIES

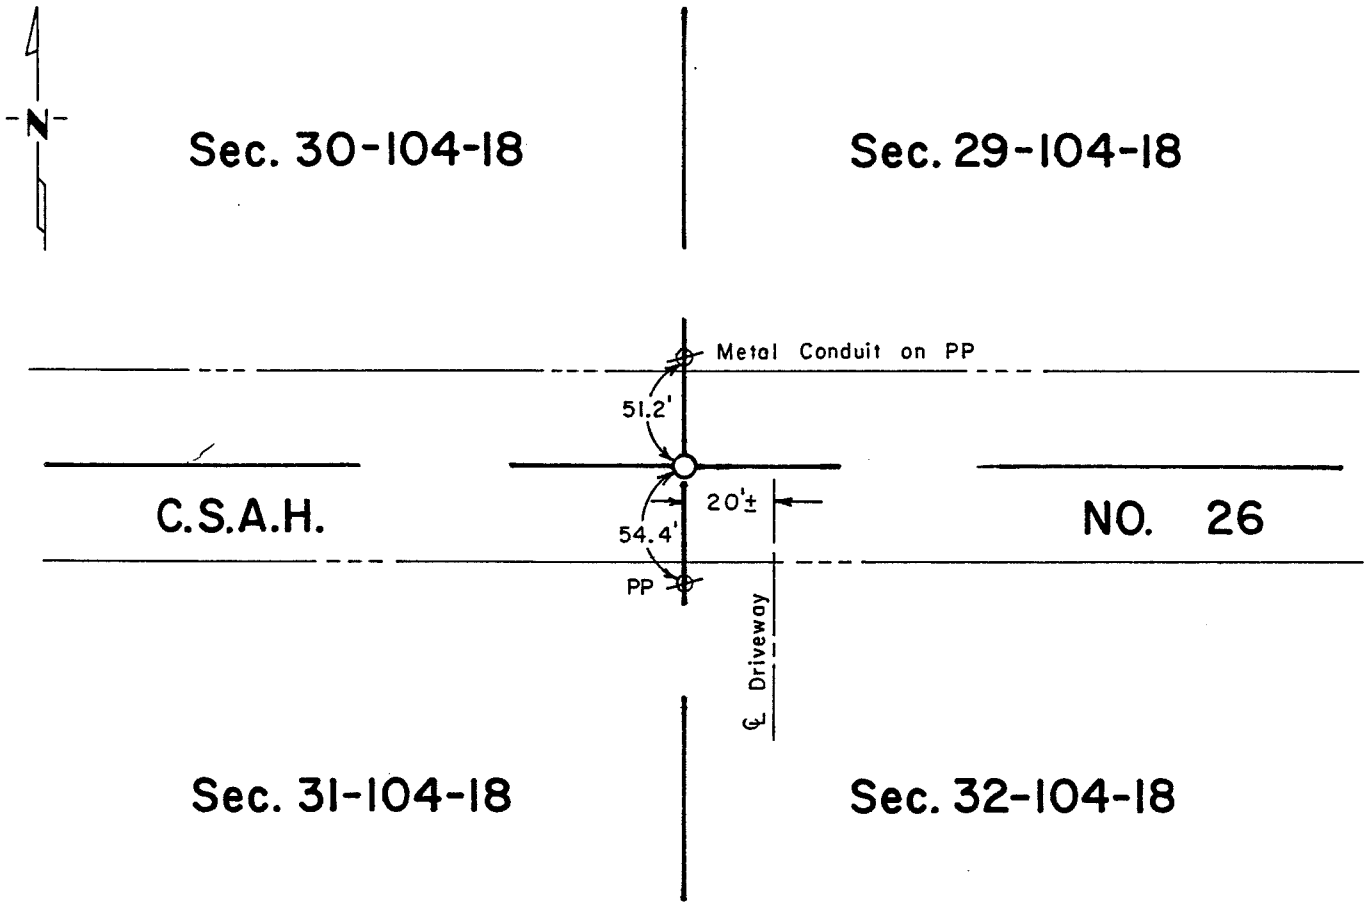

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-30-91

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Sec. 29-104-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Survey Office in 1854. The government notes show this corner was marked with a post with a trench and the following ties were taken:

14" Burr Oak	S 33 W	90 links	(59.40')
6" Burr Oak	N 89 E	265 links	(174.90')

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorders Office

Book 'A' in the Mower County Engineer's Office shows a magnetic corner inplace. Ties were taken and recorded as follows:
54.4 feet South to PP 51.2 feet North to Conduit on PP

1970 County State Aid Highway No. 26 road plans show a cast iron monument inplace.

1986 Jones, Haugh & Smith crew dug and found a cast iron monument 1.5 feet below road surface on centerline east-west roads and 20 feet more or less, west of centerline driveway south. Placed a cast iron head over a 5/8" diameter iron at road surface. Monuments found were left inplace.

Corner found fits occupation, road centerlines and past records and is accepted as best evidence of a perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 30, Township 104N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 9-17-90 (DATE) found a 3/4"Ø pipe 1.0' below road surface on ℄ ℄ of N-S-E road.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 9-17-90 (DATE) placed a cast iron monument over a 5/8"Ø iron at location of monument found.

SKETCH OF REFERENCE TIES

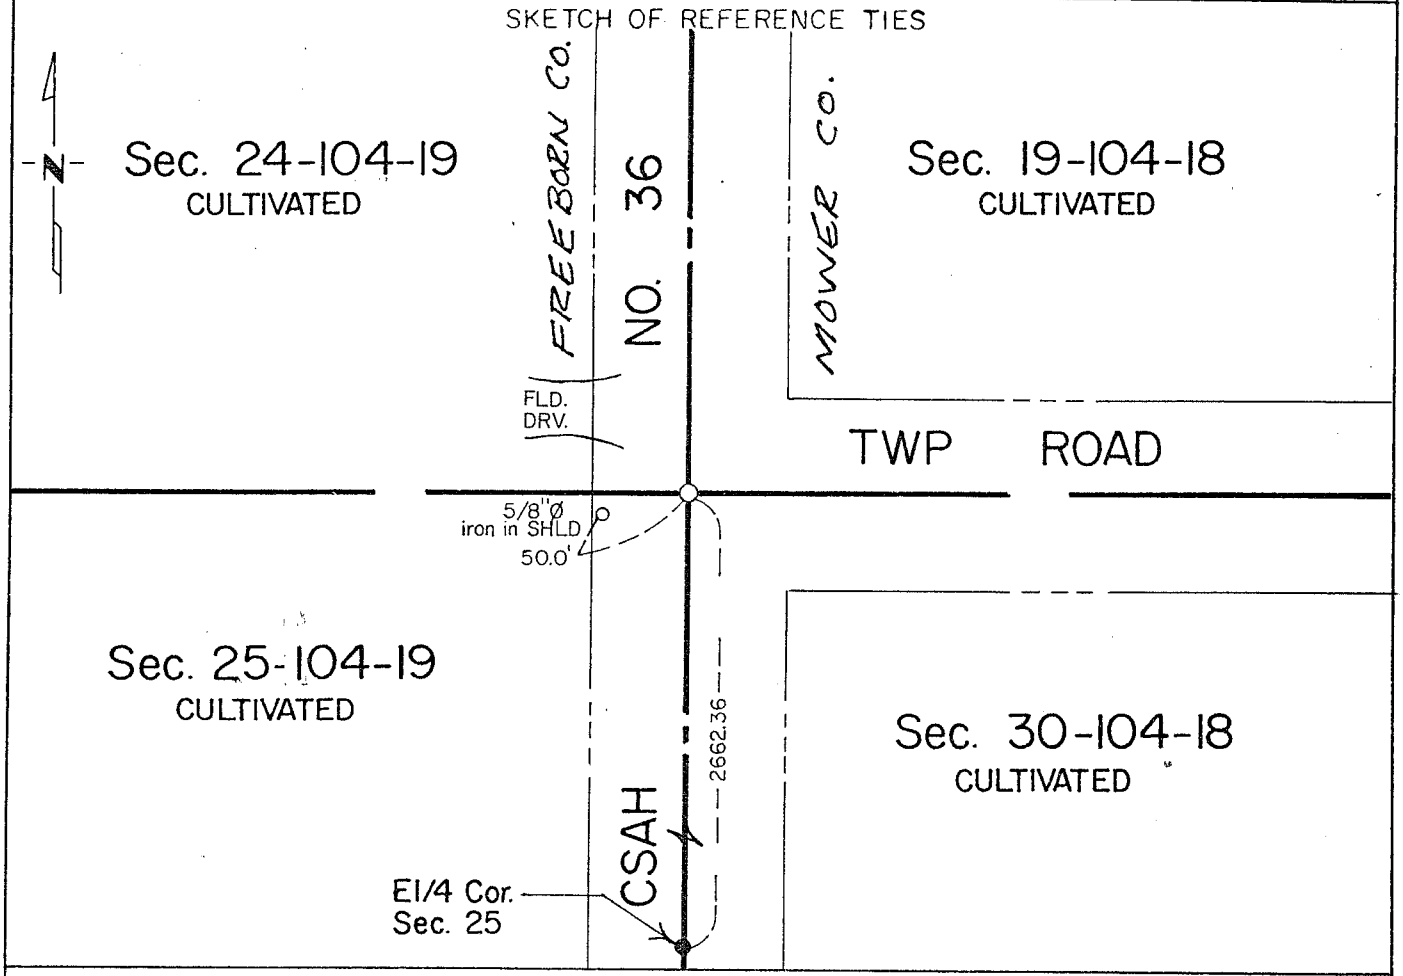

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-23-91

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Sec 30-104-18

This corner was originally established by Deputy Surveyor J.B. Reynen of the U.S. General Land Office in 1854. The government notes show this corner was marked with a charred stake and a mound of earth with a trench.

The following were contacted for section corner information:
Mower & Freeborn County Engineering Department
Mower & Freeborn County Recorder's Office

1952 Book "A" of the Mower County Engineering Department shows a concrete monument inplace and the following ties were taken:
35.5' W to PP
59.4' W to 4th F.P. on F.L. west
32.6' E to top center south end culvert
52.0' NE to SW corner Hdwl. culvert

1990 Jones, Haugh & Smith crew along with the Freeborn County backhoe dug a hole 20'x4'x6' deep on centerline centerline of north-south-east road. Found a 3/4" diameter pipe 1.0' below road surface. Continued digging and found no further evidence of public land survey. Removed pipe and placed a cast iron monument over a 5/8" diameter iron at road surface.

Monument found fits occupation and road centerlines and is accepted as best evidence of a perpetuation of the public land survey corner.

For electronic survey data and analysis contact firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 30, Township 104N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 9-17-90 (DATE) found a no evidence

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 9-17-90 (DATE) placed a cast iron monument on straight line between NE & SE corners in line with fence to East.

SKETCH OF REFERENCE TIES

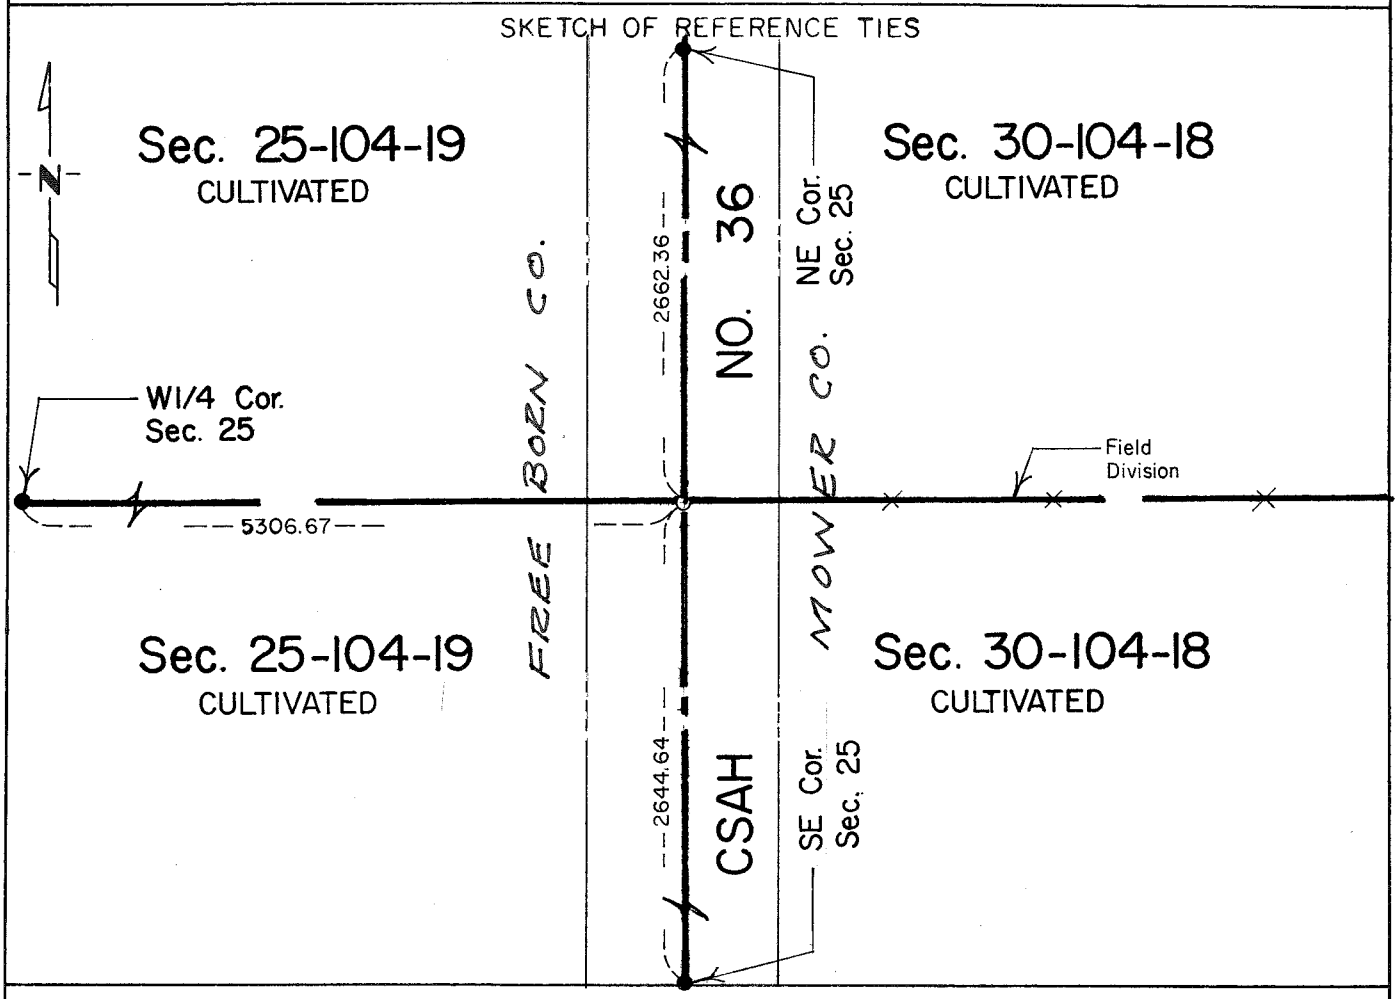

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ (SIGNATURE) 1-23-91 (DATE)

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Sec 30-104-18

This corner was originally established by Deputy Surveyor J.B. Reymen of the U.S. General Land Office in 1854. The government notes show this corner was marked with a wood post and the following ties were taken:

8" Burr Oak	N 54° E	16 links (10.56')
7" Burr Oak	S 42° W	17 links (11.22')

The following were contacted for section corner information:
Freeborn County Engineering Department
Freeborn County Recorder's Office

1990 Jones, Haugh & Smith crew along with the Freeborn County backhoe dug a hole 7'x20'x4' deep on centerline centerline of north-south road and field division east. Found no evidence of public land survey corner. Placed a cast iron monument on a straight line between NE & SE corners in line with fence to the east.

The corner placed fits occupation and road centerlines and is accepted as best evidence of the public land survey corner.

For electronic survey data and analysis contact firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 30, Township 104N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 9-17-90 (DATE) found a no evidence

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 9-17-90 (DATE) placed a cast iron monument on straight line between NE&SE corners in line with fence to East.

SKETCH OF REFERENCE TIES

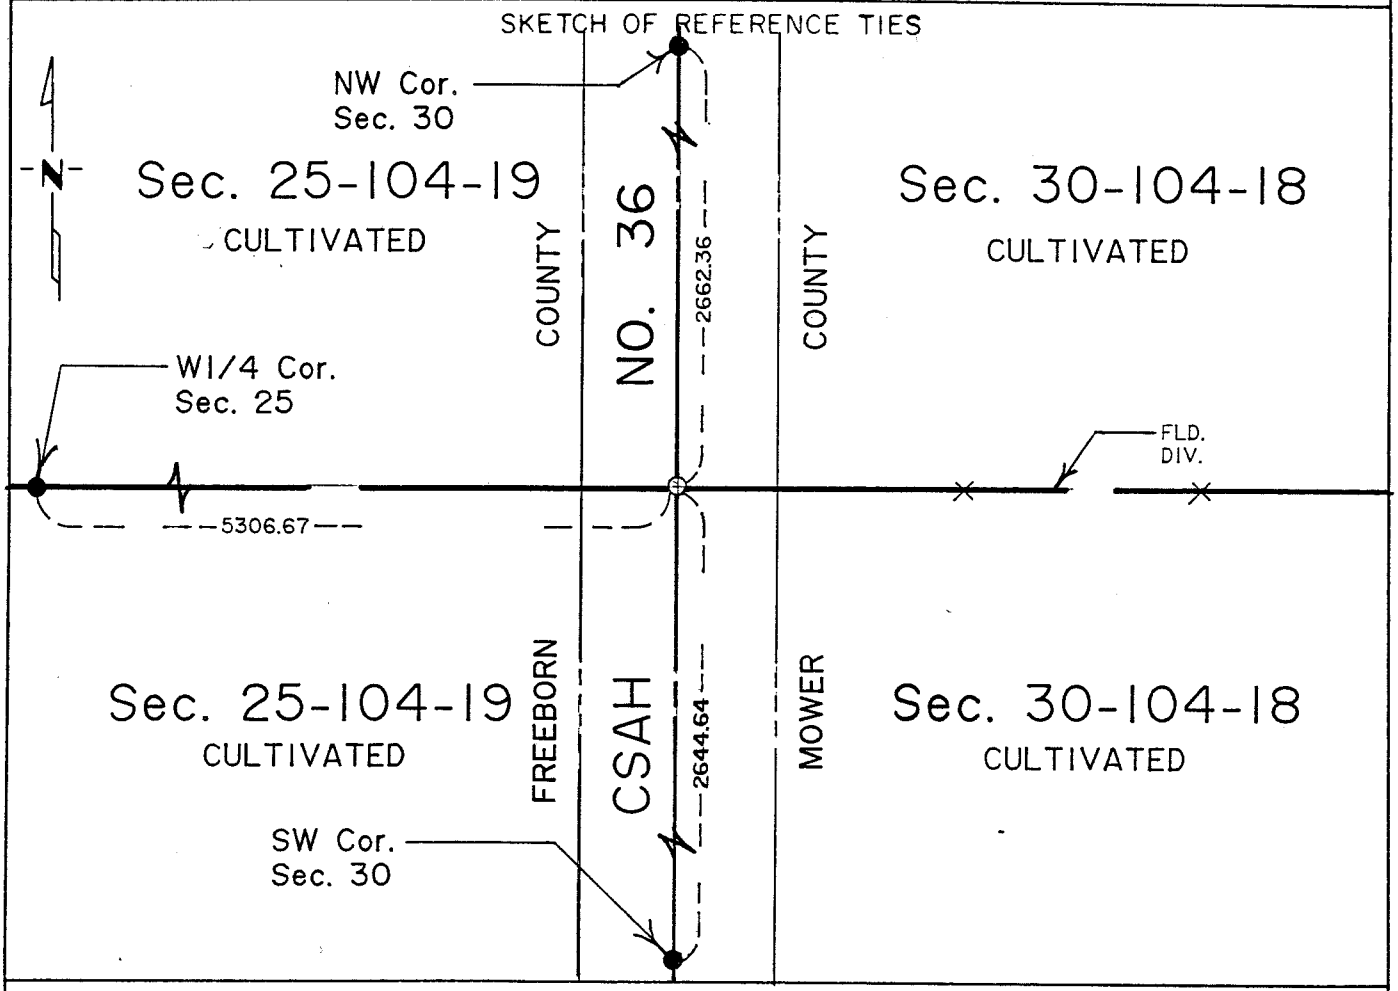

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ (SIGNATURE) 7-30-91 (DATE)

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Sec. 30-104-18

This corner was originally established by Deputy Surveyor J.B. Reymen of the U.S. General Land Survey Office in 1854. The government notes show this corner was marked with a wood post. The following ties were taken:

8" Burr Oak	N 54 E	16 links	(10.56 feet)
7" Burr Oak	S 42 W	17 links	(11.22 feet)

The following were contacted for section corner information:

Freeborn & Mower County Engineering Department
Freeborn & Mower County Recorders Office

1990 Jones, Haugh & Smith crew along with the Freeborn County backhoe dug a hole 7'x20'x4' deep on centerline of north-south road and field division east. Found no evidence of public land survey corner. The W 1/4 corner was re-set on a straight line between NE and SE corners in line with fence to east. A cast iron monument was placed at corner.

This location fits occupation and road centerlines and is accepted as best evidence of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 30, Township 104N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 9-17-90 (DATE) found a 3/4"Ø pipe 1.0' below road surface continued digging and found no further evidence.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 9-17-90 (DATE) placed a cast iron monument over 5/8"Ø iron at place of pipe on road surface.

SKETCH OF REFERENCE TIES

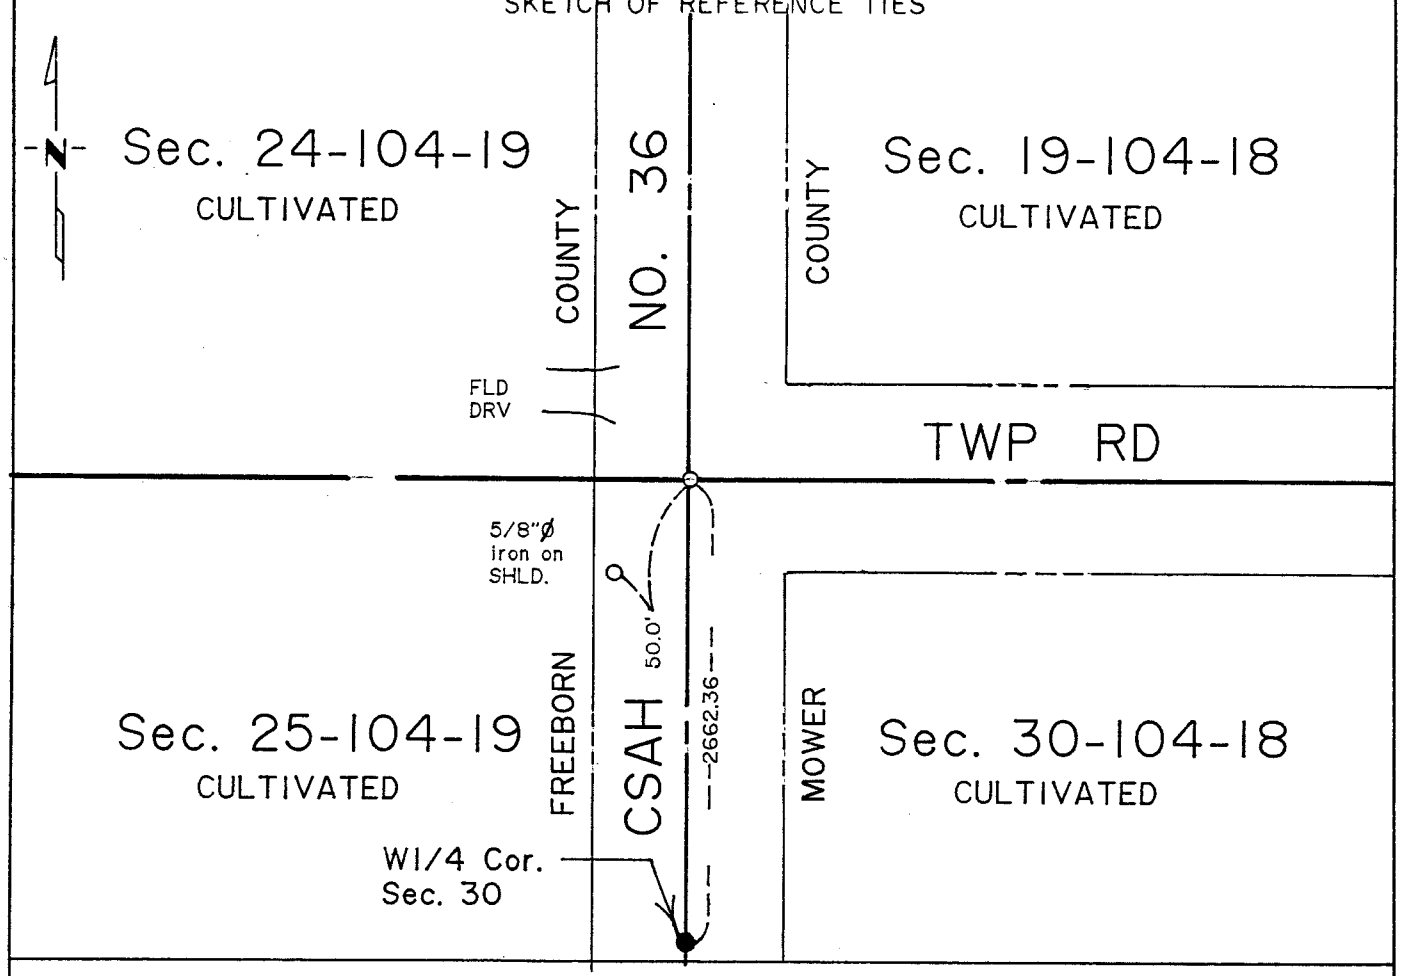

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-30-91

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Sec. 30-104-18

This corner was originally established by Deputy Surveyor J.B. Reymen of the U.S. General Land Survey Office in 1854. The government notes show this corner was marked with a charred stake and a mound of earth with a trench.

The following were contacted for section corner information:

Freeborn & Mower County Engineering Department
Freeborn & Mower County Recorders Office

1952 Book 'A' of the Mower County Engineering Department show a concrete monument inplace and the following ties were taken:
35.5' W to PP
59.4' W to 4th FP on FL west
32.6' E to top center S end culvert
52.0' NE to SW cor hdwl culvert

1990 Jones, Haugh & Smith crew along with the Freeborn County backhoe dug on centerline centerline of north-south-east road a hole 20'x4'x6' deep. Found a 3/4" diameter pipe 1.0' below road surface. Continued digging and found no further evidence of public land survey corner. A cast iron monument was placed over monument found.

Monument found fits occupation and road centerlines and is accepted as best evidence of a perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 31, Township 104N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-1-89 (DATE) found a 3/4"Ø x 18" IRON OVER A 1 3/4"Ø PIPE OVER A STONE.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-1-89 (DATE) placed a 5/8"Ø IRON OVER PIPE AND SET CAST IRON MONUMENT.

SKETCH OF REFERENCE TIES

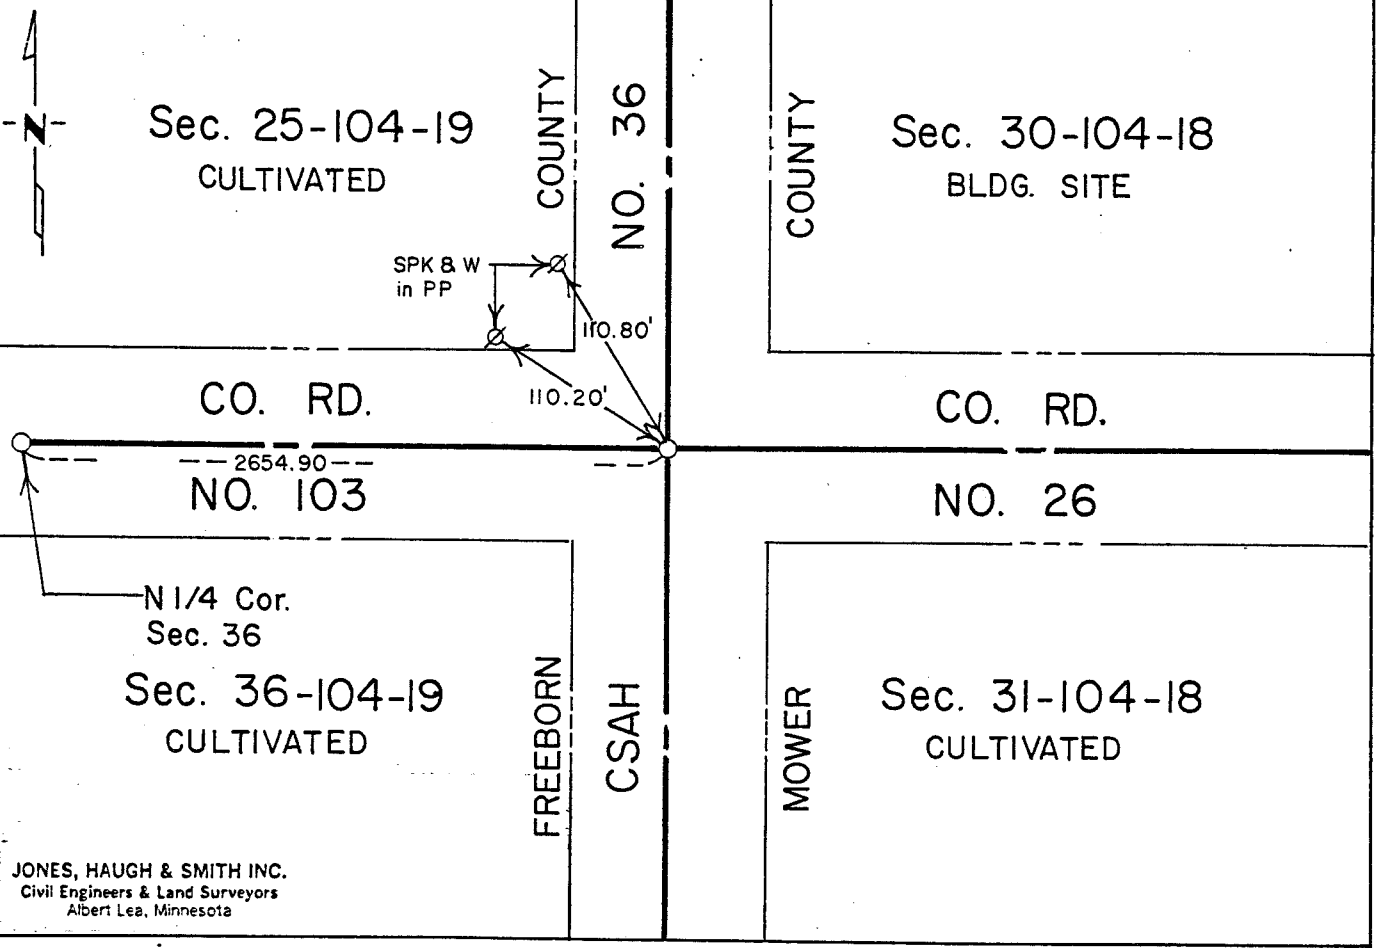

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 10-11-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW cor Sec 31-104-18

This corner was originally established by Deputy Surveyor J.B. Reyman of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench. The following ties were taken:

10" Burr Oak	N 32° W	73 links (48.18 ft)
8" Burr Oak	S 23° E	703 links (463.98 ft)
6" Burr Oak	N 24° E	111 links (73.26 ft)
12" Burr Oak	S 12° W	91 links (60.06 ft)

The following were contacted for section corner information:
Freeborn County Engineering Department
Freeborn County Recorder's Office
Mower County Engineering Department
Mower County Recorder's Office

1887 Clausen, County Surveyor, notes show a government post inplace.

1952 Book "A" of the Mower County Engineering Department show an iron inplace. The following ties were taken:

50.2' SW to TP	134.0' NW to PP
69.0' NE to Maple tree	53.1' SE to TP

1954 Freeborn County notes show a pipe inplace. The following ties were taken:

Mower County Road sign (C-13)	SE	71.3'
Spk & W in REA pole	NNE	68.9'
SW cor School	NE	130.5'

1962 George Murphy, County employee, uncovered corner. The following ties were taken:

Spk & W in PP	68.9' NE
Spk & W in TP	60.0' SW
Face of tele stand pipe	56.3' SE

1989 Jones, Haugh & Smith Inc crew under the direction of John Schulte, Freeborn County Surveyor, dug with the County backhoe on centerline centerline of north-south-east-west roads. Uncovered a 3/4" diameter x 18" iron 0.5' deep over a 1 3/4" diameter bent pipe. Using a tile probe found pipe to be over a stone 3 feet below road surface. Set a 5/8" diameter iron over pipe and a cast iron monument at surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 31, Township 104N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-15-89 (DATE) found a NO EVIDENCE OF PLS CORNER

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-15-89 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

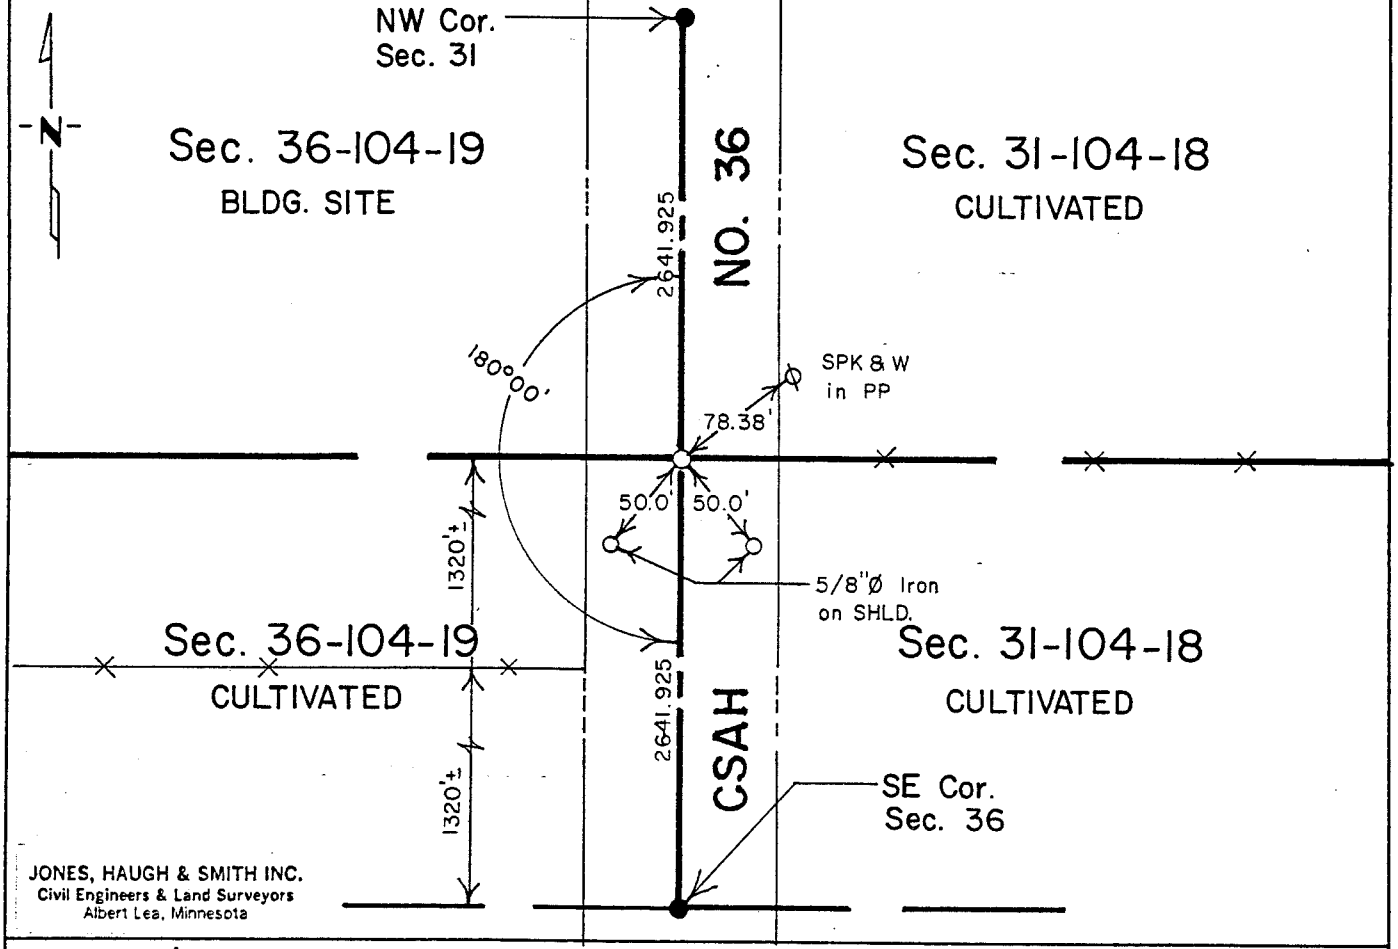

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 10-11-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 cor Sec 31-104-18

This corner was originally established by Deputy Surveyor J.B. Reyman of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench. The following ties were taken:

12" Burr Oak	S 37° E	198 links (130.68 ft)
5" Burr Oak	N 26° W	26 links (17.16 ft)

The following were contacted for section corner information:
Freeborn County Engineering Department
Freeborn County Recorder's Office
Mower County Engineering Department
Mower County Recorder's Office

1887 Clausen, Mower County Surveyor, notes show a government post inplace.

1989 Jones, Haugh & Smith Inc crew under the direction of John Schulte, Freeborn/Mower County Surveyor, dug with the County backhoe and found no evidence of the public land survey corner. Set a cast iron monument on line at midpoint between the northeast and southeast corners of this section.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 31, Township 104N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-15-89 (DATE) found a SQUARE HEAD BOLT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-15-89 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

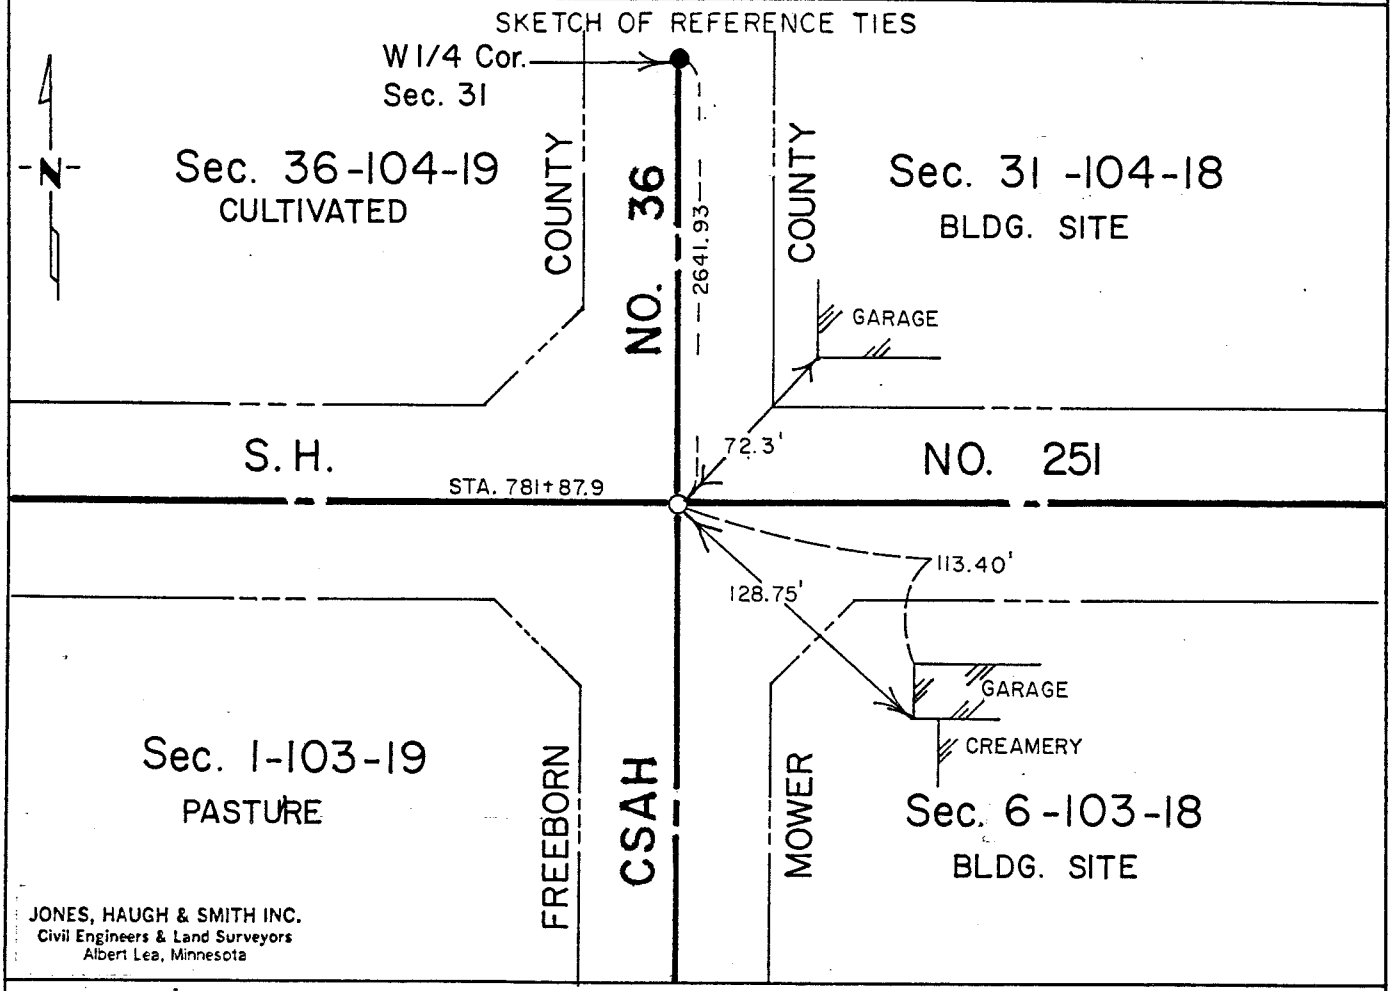

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 10-29-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW cor Sec 31-104-18

This corner was originally established by Deputy Surveyor J.B. Reyman of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench. The following ties were taken:

14" Burr Oak	N 75° W	143 links (94.38 ft)
14" Burr Oak	S 26° E	275 links (181.50 ft)

The following were contacted for section corner information:
Freeborn County Engineering Department
Freeborn County Recorder's Office
Mower County Engineering Department
Mower County Recorder's Office

1887 Clausen, Mower County Surveyor, notes show a government post inplace.

1944 John Nielsen, Freeborn County Surveyor uncovered a wood stake with a bolt in center. The following ties were taken:

SW corner of garage	72.4' NE
NW corner of Creamery	129.0' SE
NE corner concrete platform	178.5' SSE

1954 C.V. Jones Engineering notes show a square head bolt inplace. The following ties were taken:

SW corner garage	72.3' NE
NW corner of Creamery	128.75' SE

1982 Jones, Haugh & Smith Inc crew uncovered a 3/4" diameter iron for a survey in the NE 1/4 Section 6-103-18.

1989 SAR No. 1 construction survey shows a wood stake with a bolt in center at this location. Jones, Haugh & Smith Inc crew under the direction of John Schulte, Freeborn County Surveyor, placed a cast iron monument on centerline centerline of north-south-east-west roads at location of bolt found.

The monument found fits occupation and road centerlines within the section and is in agreement with past records and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 33, Township N104, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 12-5-90 (DATE) found a concrete nail an washer with flagging 0.5' deep found no further evidence

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 12-5-90 (DATE) placed a 1/2"Ø octagon iron on ℄ of N-S road and ℄ of E-W road.

SKETCH OF REFERENCE TIES

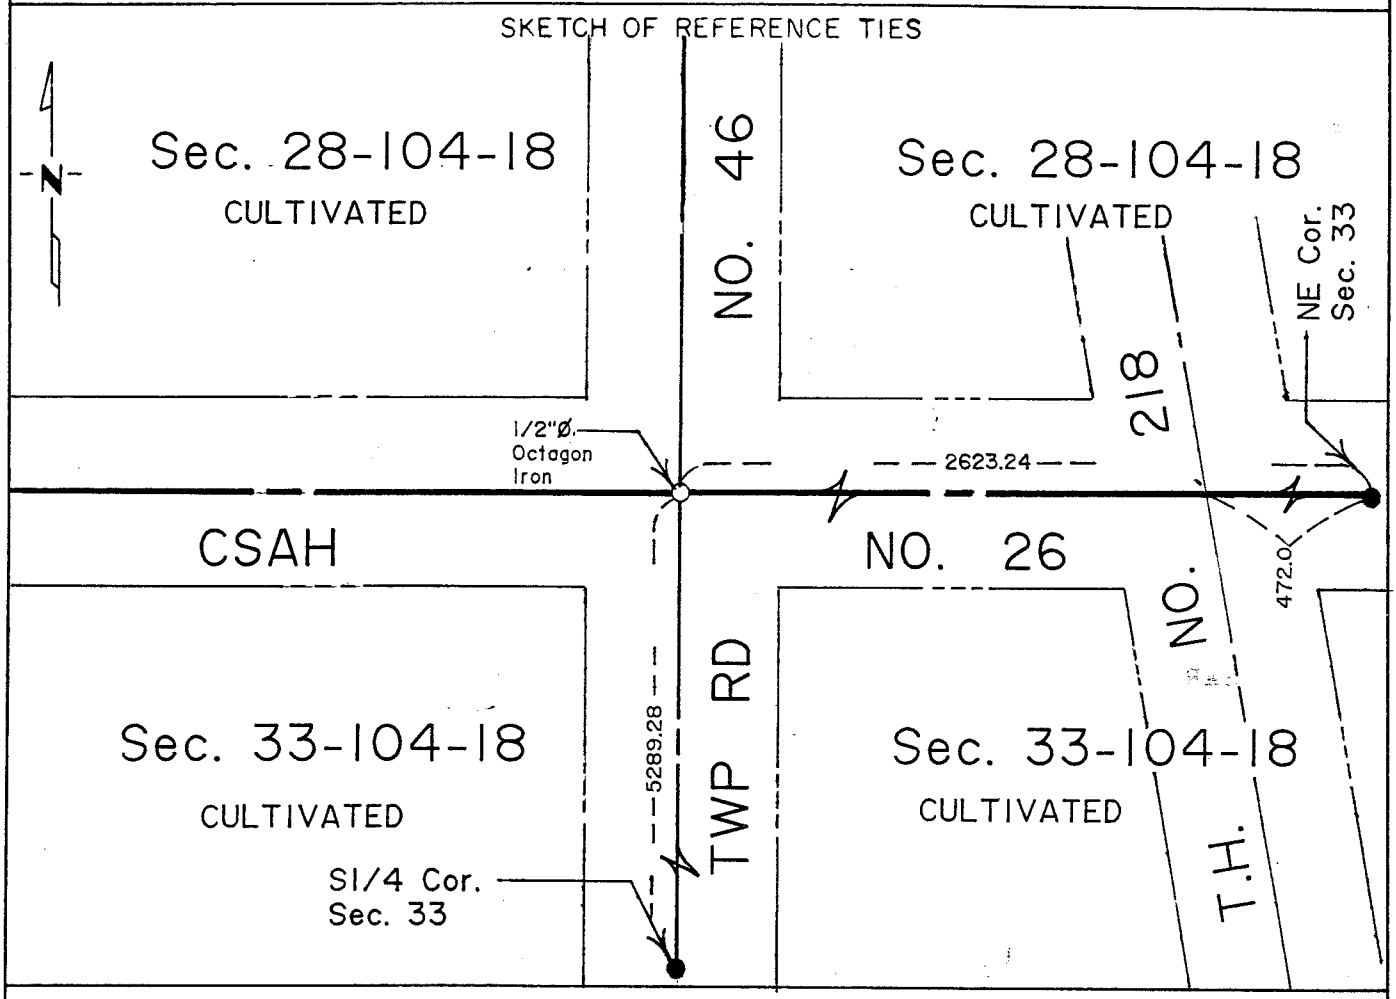

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-30-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Sec. 33-104-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Survey Office in 1854. The government notes show this corner was marked with charred stake and a mound of earth with a trench.

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorders Office

1930± Mower County Highway grading plans show a corner at this location.

1988 Ray Tucker, Registered Land Surveyor, dug with Mower County backhoe before County began their 1988 overlay project.

1990 Jones, Haugh & Smith crew dug and found a concrete nail with flagging 0.5 feet deep. Found no further evidence of public land survey corner. No information was available from Ray Tucker to substantiate this corner location. Placed a 1/2" octagon iron on centerline centerline of north-south-east-west roads.

Corner placed fits occupation and road centerlines and agrees with 1930 grading project and is accepted as best evidence of a perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 33, Township N104, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 12-5-90 (DATE) found a 1/2"Ø iron in 6" concrete monument.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

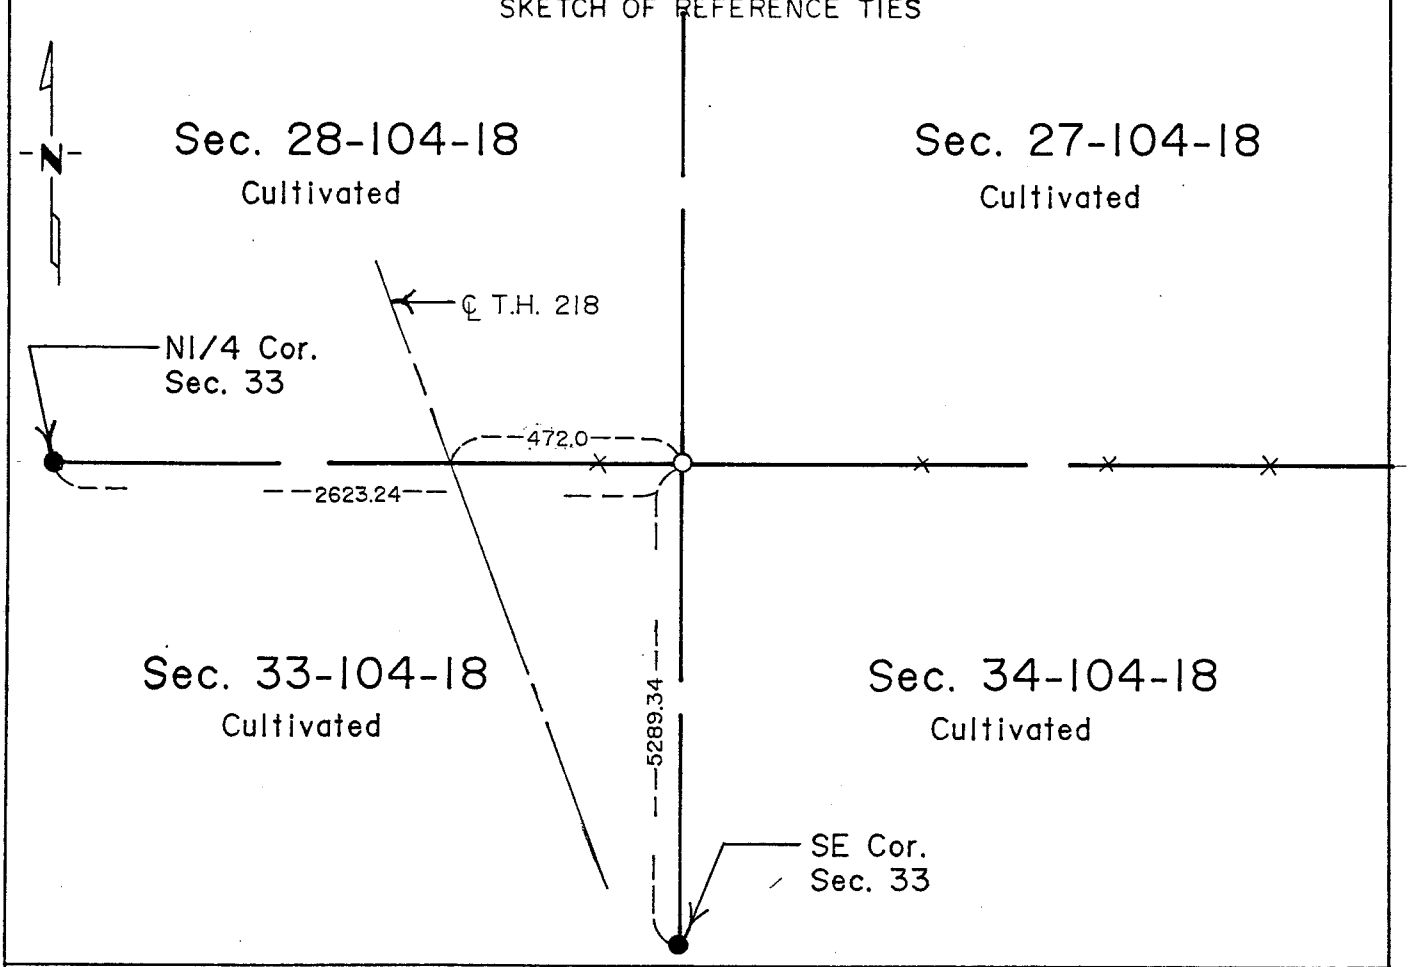

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-30-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NE corner Sec. 33-104-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Survey Office in 1854. The government notes show this corner was marked with charred stake and a mound of earth with a trench.

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorders Office

Book 'A' in the Mower County Engineering Office show a concrete monument inplace in line with fences east and west. The following tie was recorded:
472.0' W of centerline TH No. 218

1990 Jones, Haugh & Smith crew found a 1/2" diameter iron cast in a 6" square concrete monument in E-W fence line 472 feet more or less, east of centerline Trunk Highway 218.

Corner found fits occupation and past records and is accepted as best evidence of a perpetuation of public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 34, Township 104N, Range 18W, 5 P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

On 7-10-90 found STONE AND BRICK

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

On 7-12-90 placed 5/8" REBAR AND COUNTY CAP OVER THE STONE

SKETCH OF REFERENCE TIES

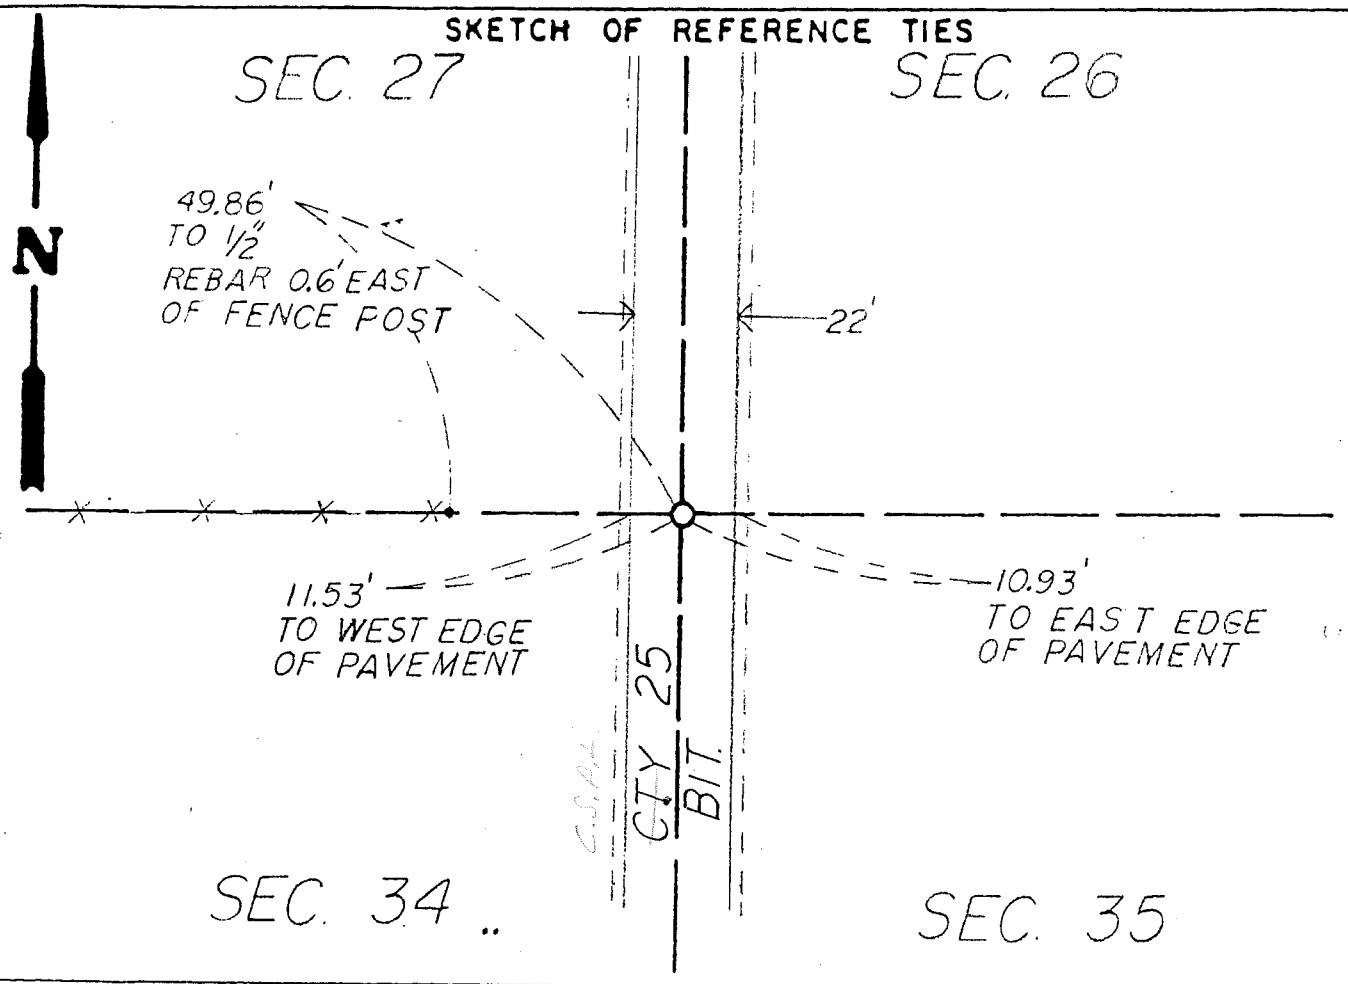

Statement of evidence relative to this corner location is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald J. Olson — Signature
7-13-90 — Date

Registration No. 11009

☒ Land Surveyor ☐ Prof. Engineer
☐ County Surveyor ☐ County Engineer

Zenk·Read·Trygstad & ASSOCIATES, INC.
Engineers / Architects / Land Surveyors / Planners
Box 689, Albert Lea, MN 56007 507/373-0689

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____ .M. on the ____ day of _____ A.D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

NORTHEAST CORNER SECTION 34, TOWNSHIP 104 NORTH, RANGE 18 WEST, 5TH P.M.

Aug., 1854 — William J. Anderson, Deputy Surveyor, set post at corner; deposited charred stake and made earth mound and trench as per instructions for the original Public Land Survey.

June 1885 — Clausen Field notes show a government post and mound which was used to subdivide Section 26.

1935 — County Engineer road Plans show a stone inplace.

1962 — County Engineers Road Plans show a concrete Monument inplace.

July 1990 — Zenk Read Trygstad & Associates excavated a trench 3.2 feet below the surface 4 feet West to 3 feet East of centerline and 2 feet South to 8 feet North of the Fenceline to the West. A stone 3.2 feet deep was found with pieces of brick on North side. A PK nail was found on the surface directly above the stone which agreed with the fence to the West and the existing centerline. A 1/2" pipe was set on the North side of the stone at the time of excavation.

An analysis of the record shows no evidence of the origin of the stone. The brick near the stone is evidence that the stone has been recognized and used as the corner and is accepted as marking the location of the original Public Land Survey Corner.

P. 485
Bk. 237

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 35, Township 104N, Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 4-13-81 (DATE) found ~~o~~ no evidence of PLS corner.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 4-15-81 (DATE) placed a 4" Dia. cast iron marker stamped Quarter Corner

SKETCH OF REFERENCE TIES

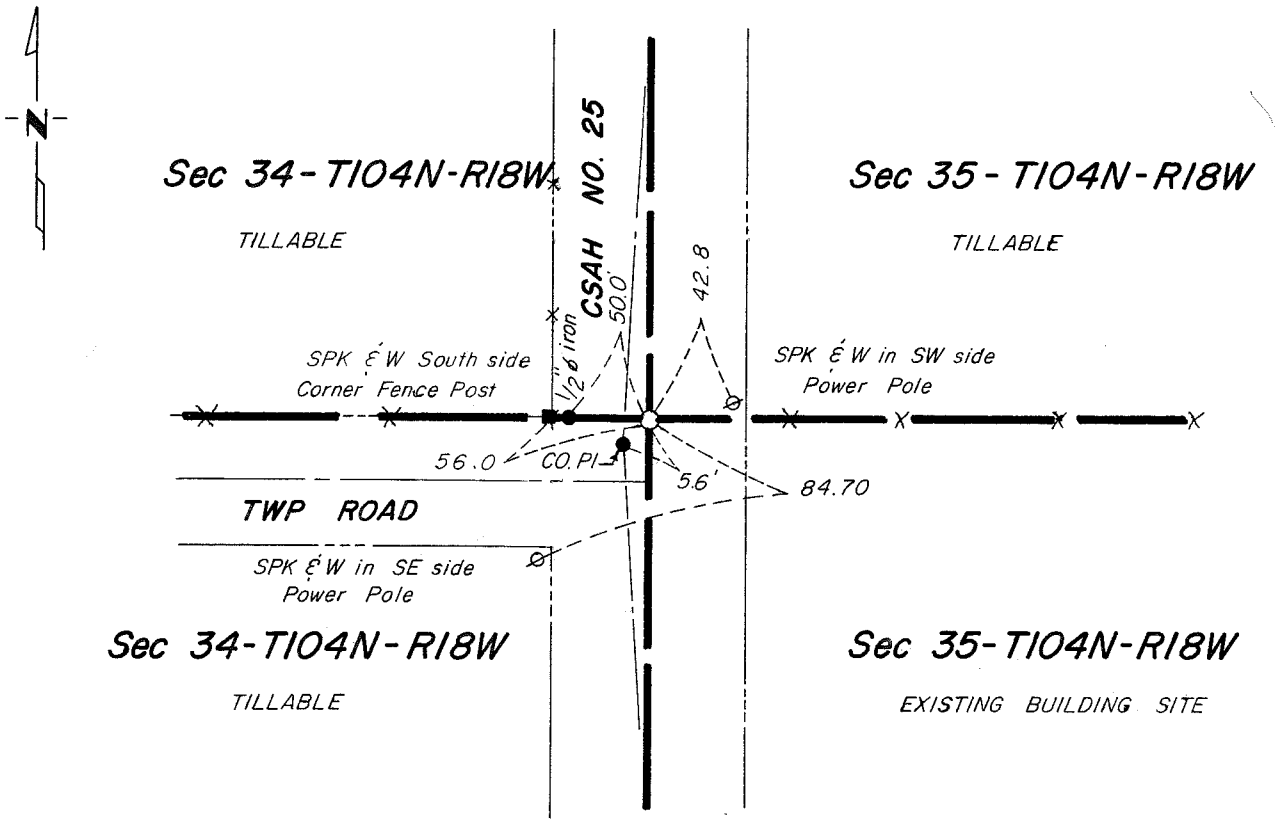

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ (SIGNATURE) 12-14-88 (DATE)

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____ .M. on the _____ day of _____ A.D., 19__

Register of Deeds _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE
W¼ corner Sec 35-T104N-R18W

1854 - William I. Anderson, Deputy Surveyor, set a post for the W¼ corner of Sec 35-T104N-R18W, during the original public land survey.

Mower County grading plans for County State-Aid Highway No. 25 indicate an iron pin 5.0 feet west of the W¼ corner Sec 35-T104N-R18W.

Jones, Haugh & Smith Inc personnel excavated a 10' x 5' x 4.5' deep hole at location of W¼ corner as shown on Mower County road plans, and found no evidence of the original wood post.

Jones, Haugh & Smith Inc personnel, then set a cast iron monument on a straight line between northwest corner Sec 35 and the southwest corner Sec 35, and in line with a fence line east and a fence line west. Distance to the northwest section corner is 2642.0. Distance to the southwest section corner is 2636.31.

The above corner agrees with existing occupation lines, existing county road surveys and has been used and recognized as the corner in several surveys. It is accepted as a perpetuation of the public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 35, Township 104N, Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 4-8-81 (DATE) found a ½" ø (2.5' deep) in concrete in 4" clay tile over iron by stone & old fence post 3.5' deep.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 4-8-81 (DATE) placed a 5/8" ø iron (capped #13807) over monuments found.

SKETCH OF REFERENCE TIES

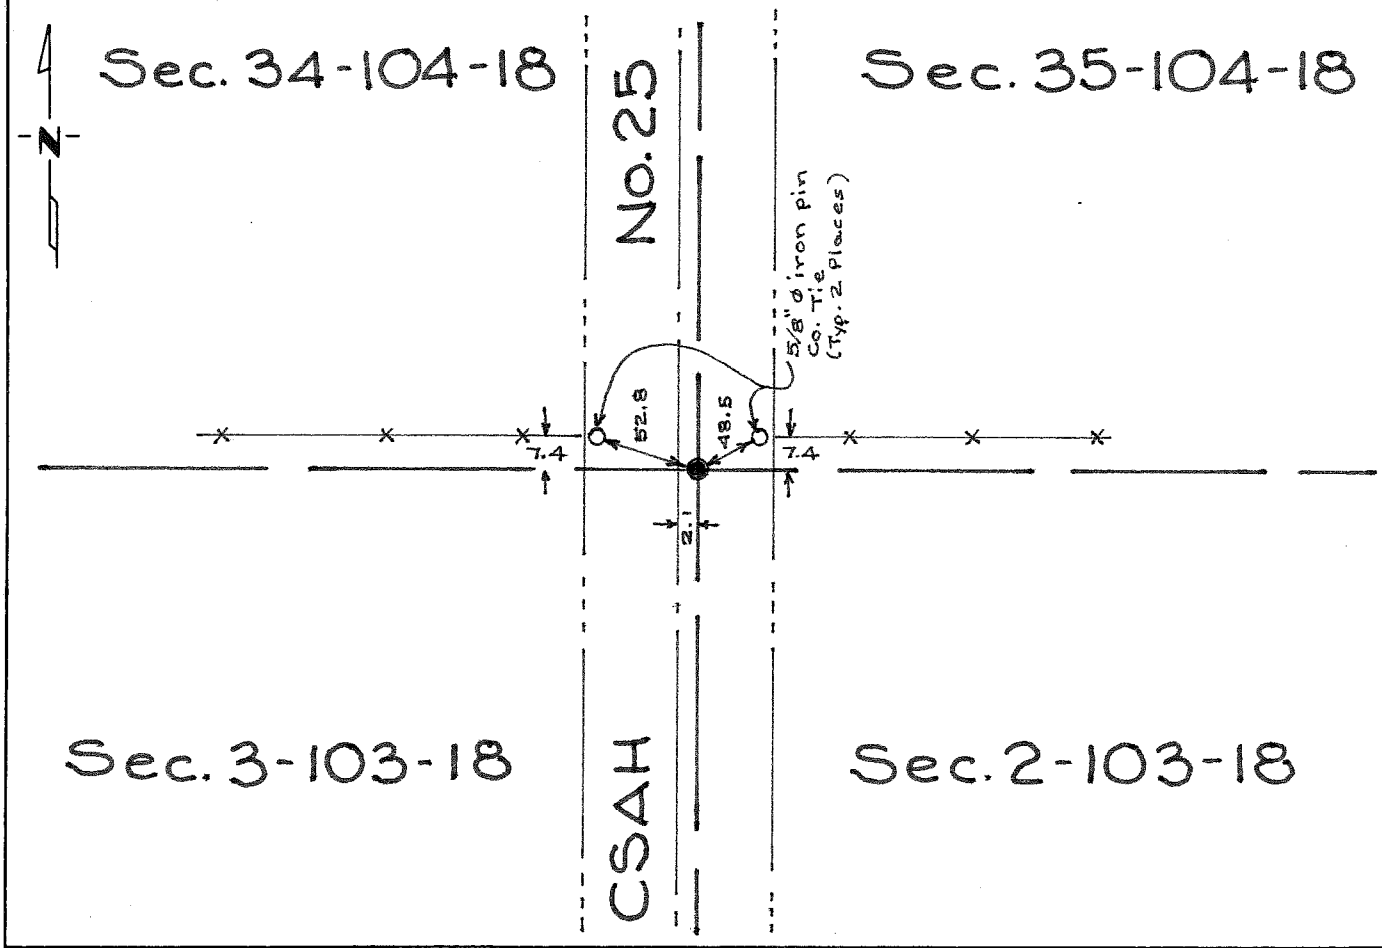

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ (SIGNATURE) 12-12-88 (DATE)

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE
SW corner Section ~~36~~ 35-104-18

This corner was originally established by Deputy Surveyor John Ball of the US General Land Office in 1854. The government notes show this corner was marked with a wood post and made a mound of earth with trench.

The following were contacted for section corner information:

Mower County Engineering Department

The record book in the office of the Mower County Engineer indicates a stone was found and ties were taken.

County grading plan shows an iron monument was found during road grading project.

1981 Jones, Haugh & Smith crew dug with County backhoe at location of good signal with metal locator and uncovered a ½" diameter iron in a 4" diameter clay tile over an iron on the side of a field stone with a wood post on the north side of the stone. Reset clay tile with ½" diameter iron and placed a 5/8" diameter iron over it on road surface.

The monuments found agree with past record and fits occupation within the section and is accepted as best evidence of the original public land survey corner.

For electronic survey data and analysis, contact firm of Jones, Haugh & Smith

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 36, Township 104N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 10-2-92 (DATE) found a ½"ø x 30" IRON OVER 8"x18" FIELD STONE

■ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10-2-92 (DATE) placed a _____

SKETCH OF REFERENCE TIES

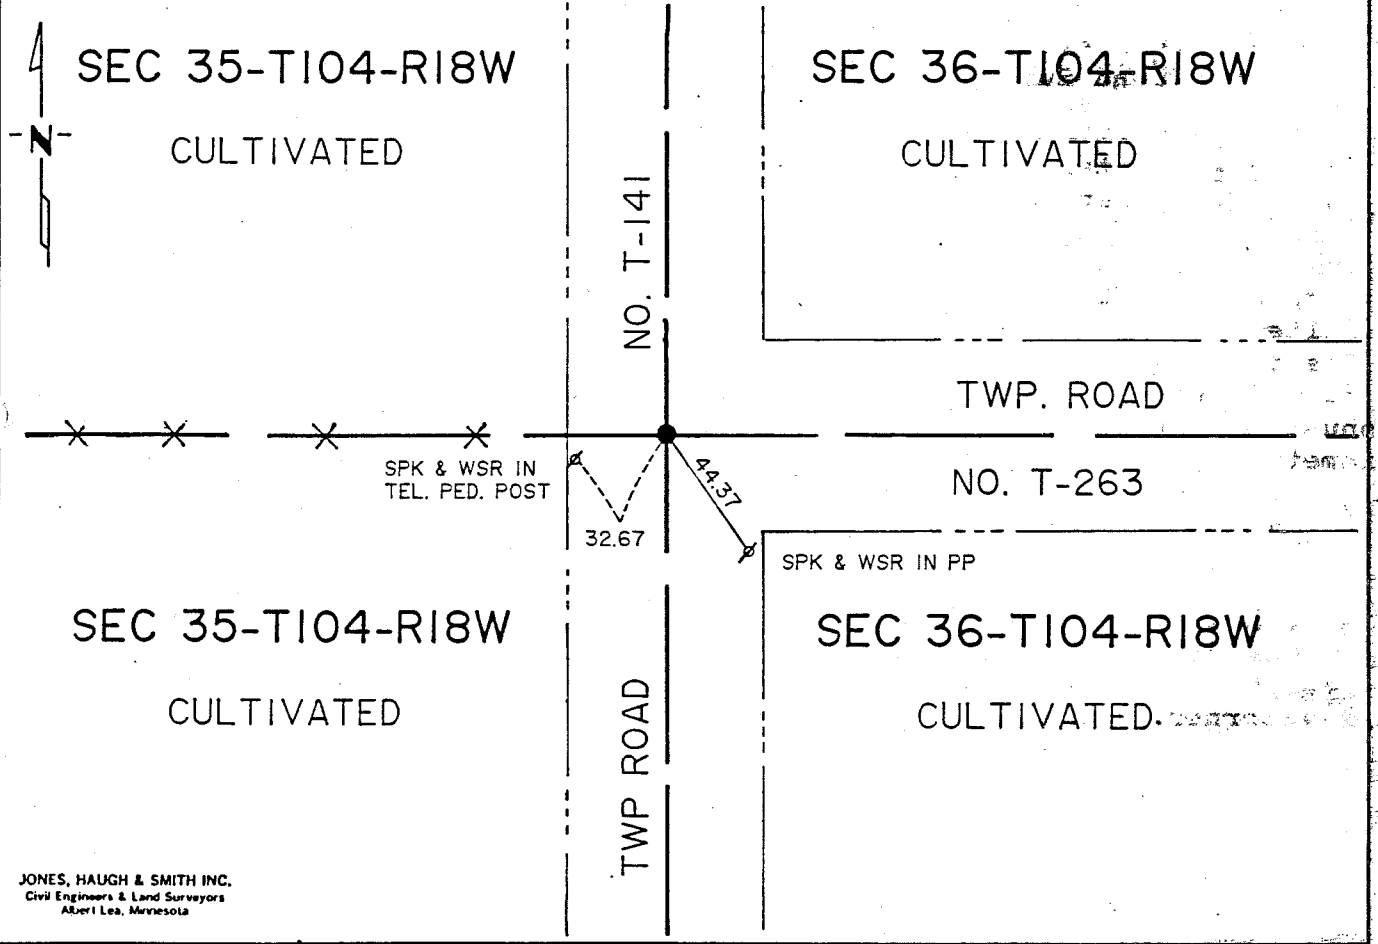

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ (SIGNATURE) 11-12-92 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Section 36-104-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench. The following ties were taken:

8" Burr Oak	S 73° W	90 links (59.40 ft)
8" Aspen	N 52° E	140 links (92.4 ft)

The following were contacted for section corner information:

Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of a perpetuation of the original public land survey corner.

1992 Jones, Haugh & Smith Inc crew, under the direction of John H. Schulte, dug with the county backhoe on centerline centerline of township roads and uncovered a 1/2" diameter x 30" long iron over a 8" x 18" long pointed field stone three feet deep in virgin soil. Set a cast iron monument over pointed stone on road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 36, Township 104N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 10-2-92 (DATE) found a 8"x16" POINTED FIELD STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10-2-92 (DATE) placed a 5/8"ø IRON ON WEST SIDE OF STONE AND 5/8"ø IRON OVER STONE ON SURFACE

SKETCH OF REFERENCE TIES

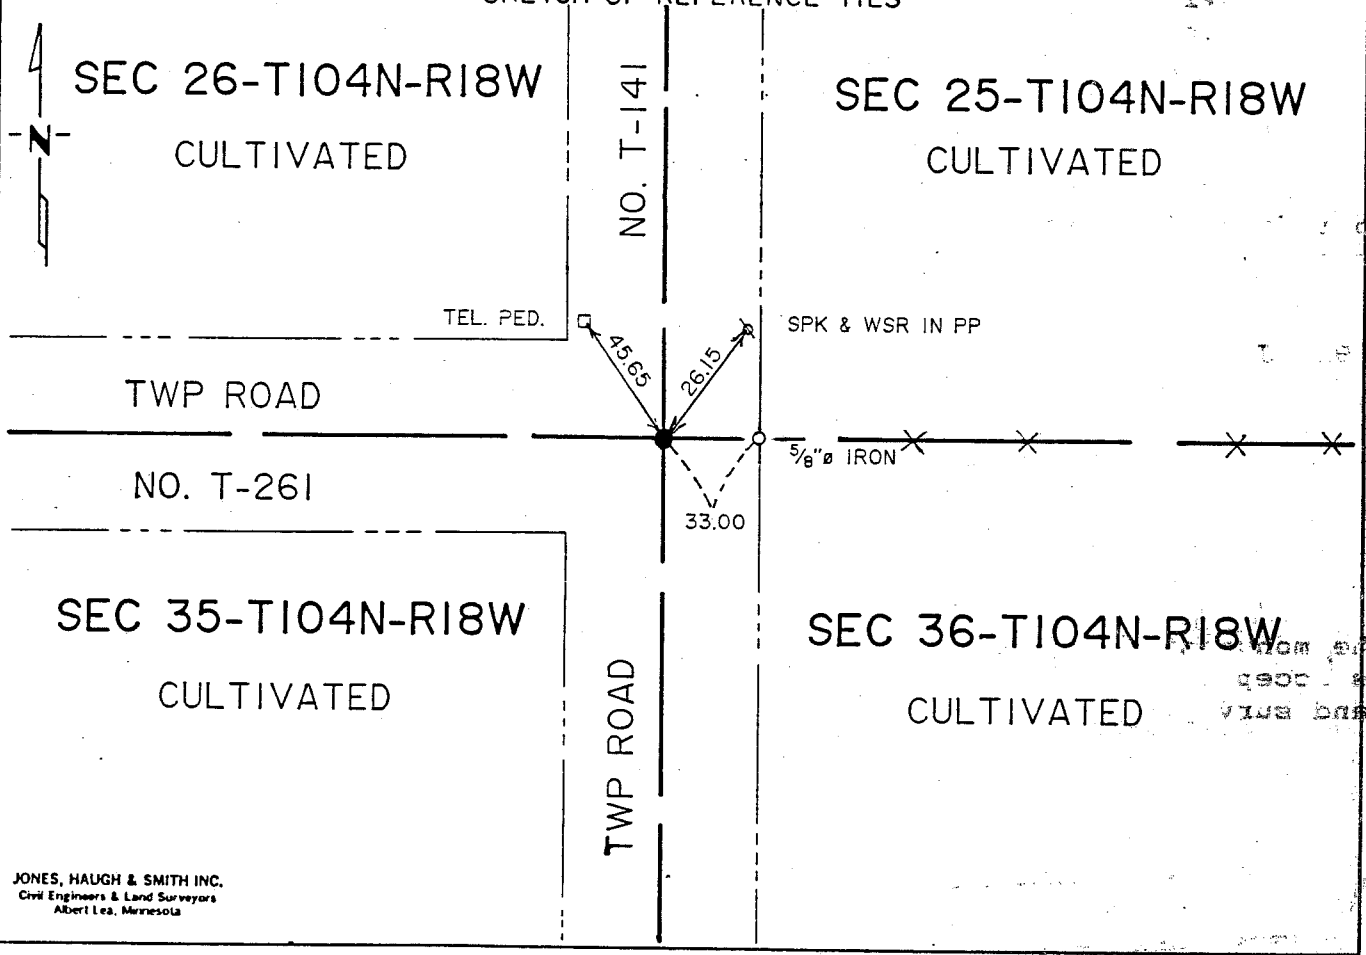

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 11-12-92

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Section 36-104-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench. The following ties were taken:

10" Burr Oak	S 2 1/2° E	25 links (16.5 ft)
9" Red Oak	N 44° E	73 links (48.18 ft)

The following were contacted for section corner information:

Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of a perpetuation of the original public land survey corner.

1992 Jones, Haugh & Smith Inc crew, under the direction of John H. Schulte, dug with the county backhoe on centerline centerline of township roads and uncovered a 8" diameter x 18" long pointed field stone three feet deep in virgin soil. Set cast iron monument over pointed stone on road surface and placed a 5/8" diameter iron on west side of stone.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public
land survey corner.