Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 32, Township 103N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 02/09/1996 (DATE) found a 5/8" IRON

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 02/09/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

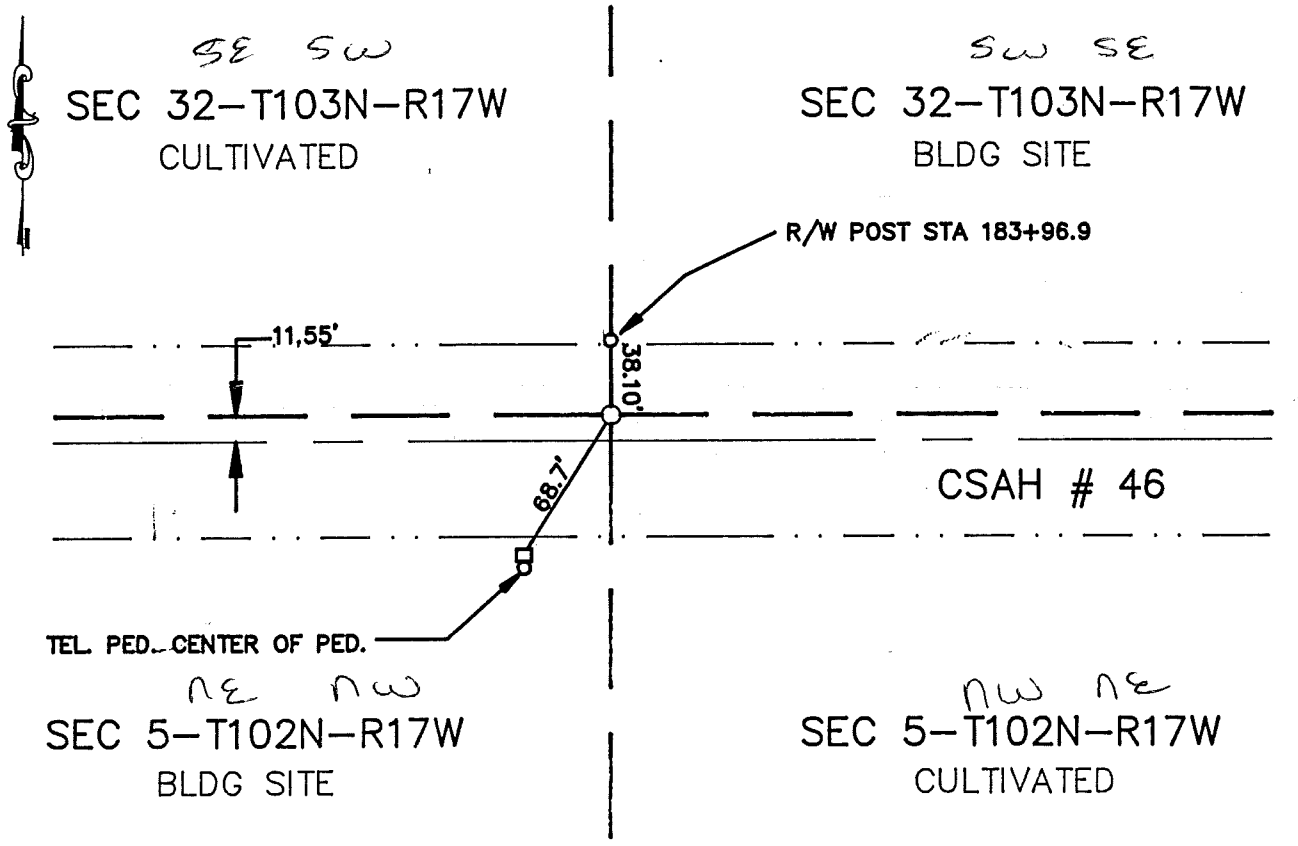

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 9-10-96 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4 p .M. on the 11 day of Sept A.D., 1996

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 447782

M.H.D. FORM NO. 2105 BOOK 92 PAGE 393 Book 92 Misc Page 393

S 1/4 Cor SEC 32-103-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

Mower County records state, corner was found 11.55' N. of centerline of CSAH # 46 (formerly TH No. 16) MHD STA-183+96.9. Found 5/8" iron.

1930+- TH No. 16 R/W map shows a corner at station 183+96.9 11.5' north of CL.

1973 Jones Haugh and Smith crew, found corner. Uncovered 5/8" iron 11.5' N. of centerline Mower County Highway Department 183+96.9.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, uncovered corner. Found 5/8" iron 11.55' N. of centerline. Set cast iron monument over iron found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 32, Township 103N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 02/08/1996 (DATE) found a PK NAIL ON CL

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 02/08/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

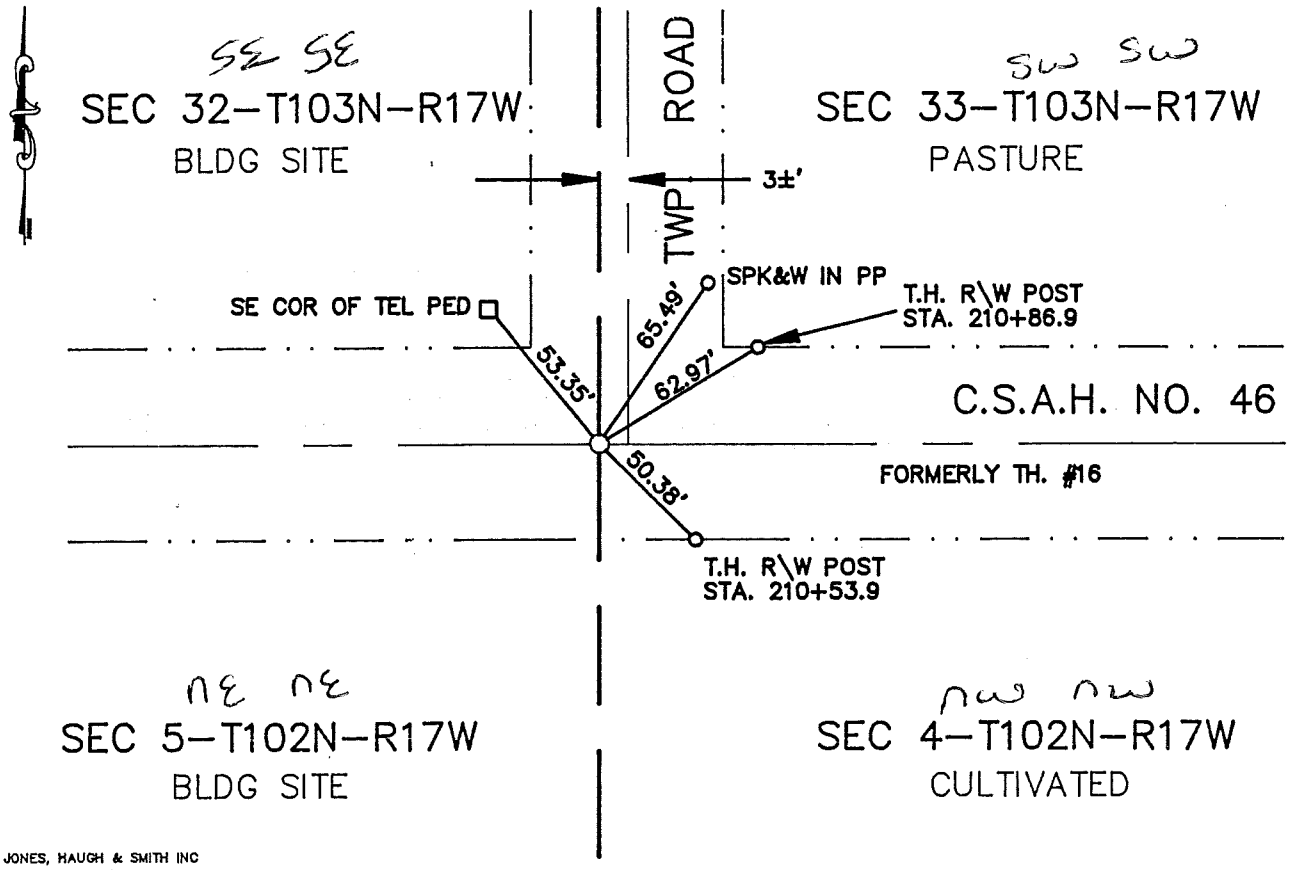

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-10-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4 P .M. on the 11 day of Sept A.D., 1996

COUNTY RECORDER Charles Engen
By Susan M. Davis, Deputy
DOCUMENT NO. 447781

M.H.D. FORM NO. 2105 BOOK 92 PAGE 391

Book 92 Misc Page 391

SE Cor SEC 32-103-17

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1930+- MNDOT R/W map for SH No. 16 shows a location for this corner.

1994 Jones Haugh and Smith crew located a spike and washer on the CL of CSAH No. 46. (formerly SH No. 16)

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, removed spike and washer and set a cast iron monument at this location. This postion is in agreement with 1930+- SH No. 16 R/W plan.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 32, Township 103N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 10/07/1994 (DATE) found a 5/8 " ROD

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 02/08/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

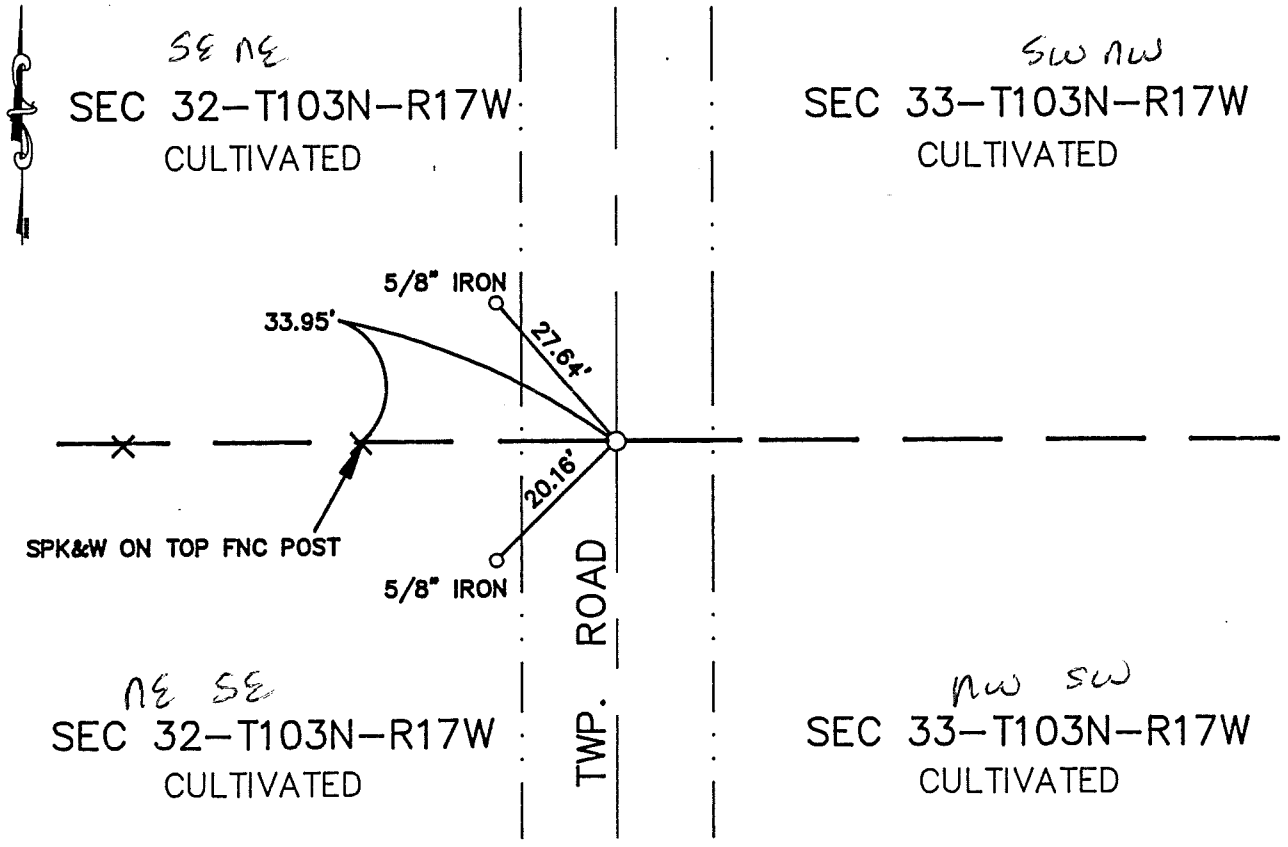

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

[signature] SIGNATURE 9-10-96 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4P .M. on the 11 day of Sept A.D., 1996

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 447780

M.H.D. FORM NO. 2105 BOOK 92 PAGE 389 Book 92 Misc Page 389

E 1/4 Cor SEC 32-103-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1994 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe and found 5/8" rod bent west on surface Found no further evidence of corner. Reset iron rod.

1995 Jones Haugh and Smith crew set a cast iron monument over the iron rod found in 1994.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 33, Township 103N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 1979 (DATE) found a brass plug 2 feet north of E¼ corner

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 1979 (DATE) placed a 5/8" cast iron monument 2 feet south of brass plug.

SKETCH OF REFERENCE TIES

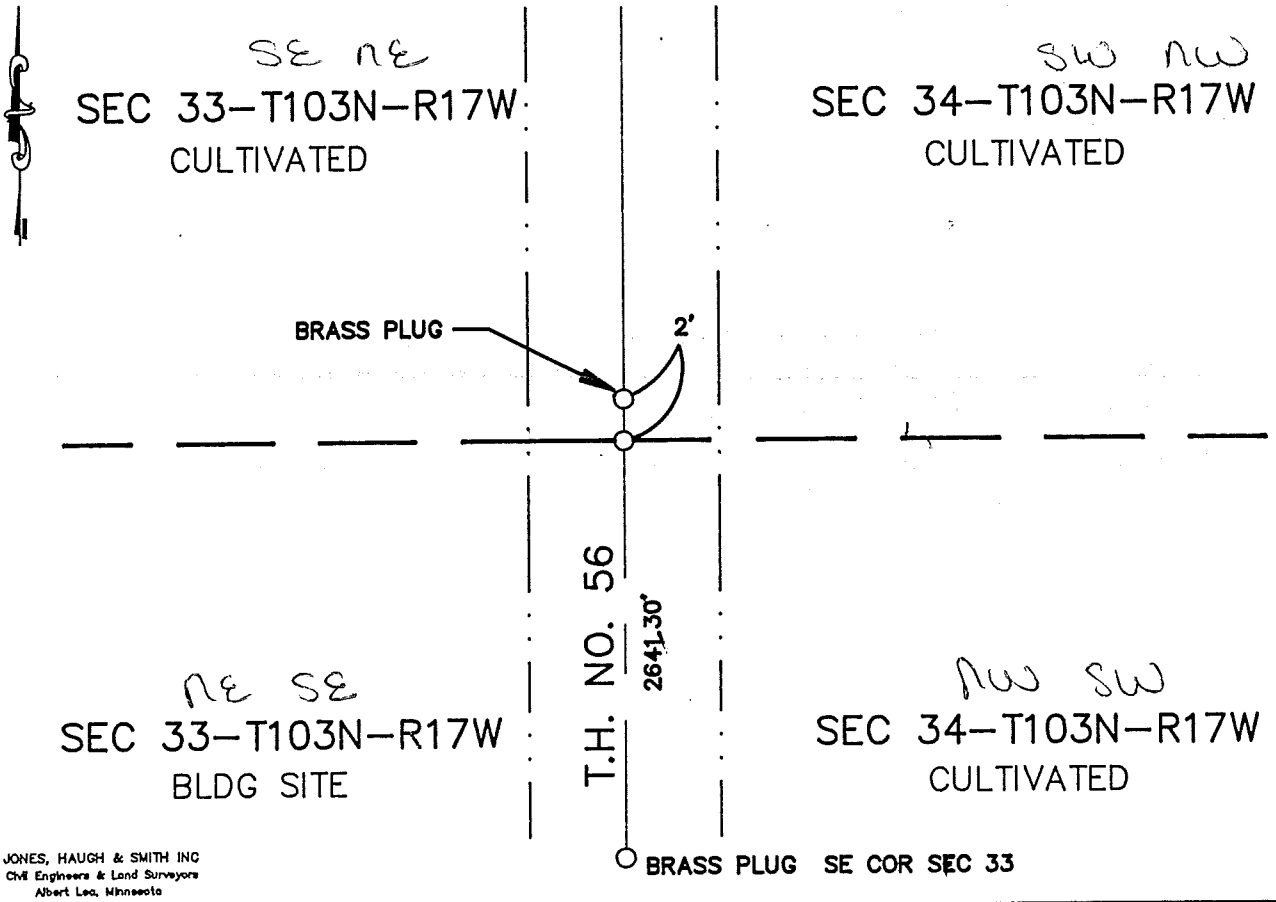

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-10-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4 P .M. on the 11 day of Sept A.D., 1996

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 447784

M.H.D. FORM NO. 2105 BOOK 92 PAGE 397 Book 92 Misc Page 397

E 1/4 Cor SEC 33-103-17

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

TH. No. 56 R/W map shows a position for this corner.

1979 Jones Haugh and Smith crew located a brass plug 2643.30' north of brass plug at SE corner section 33 and set a 5/8" iron 2' south of brass plug Mower County Highway Department station distance of 2641.3' north of SE corner.

1989 Jones Haugh and Smith crew located a 5/8" iron 2' south of brass plug on CL.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, located corner 2641.3' north of brass plug at SE corner of section 33.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 33, Township 103N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 06/04/1996 (DATE) found a BRASS PLUG

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On – (DATE) placed a –

SKETCH OF REFERENCE TIES

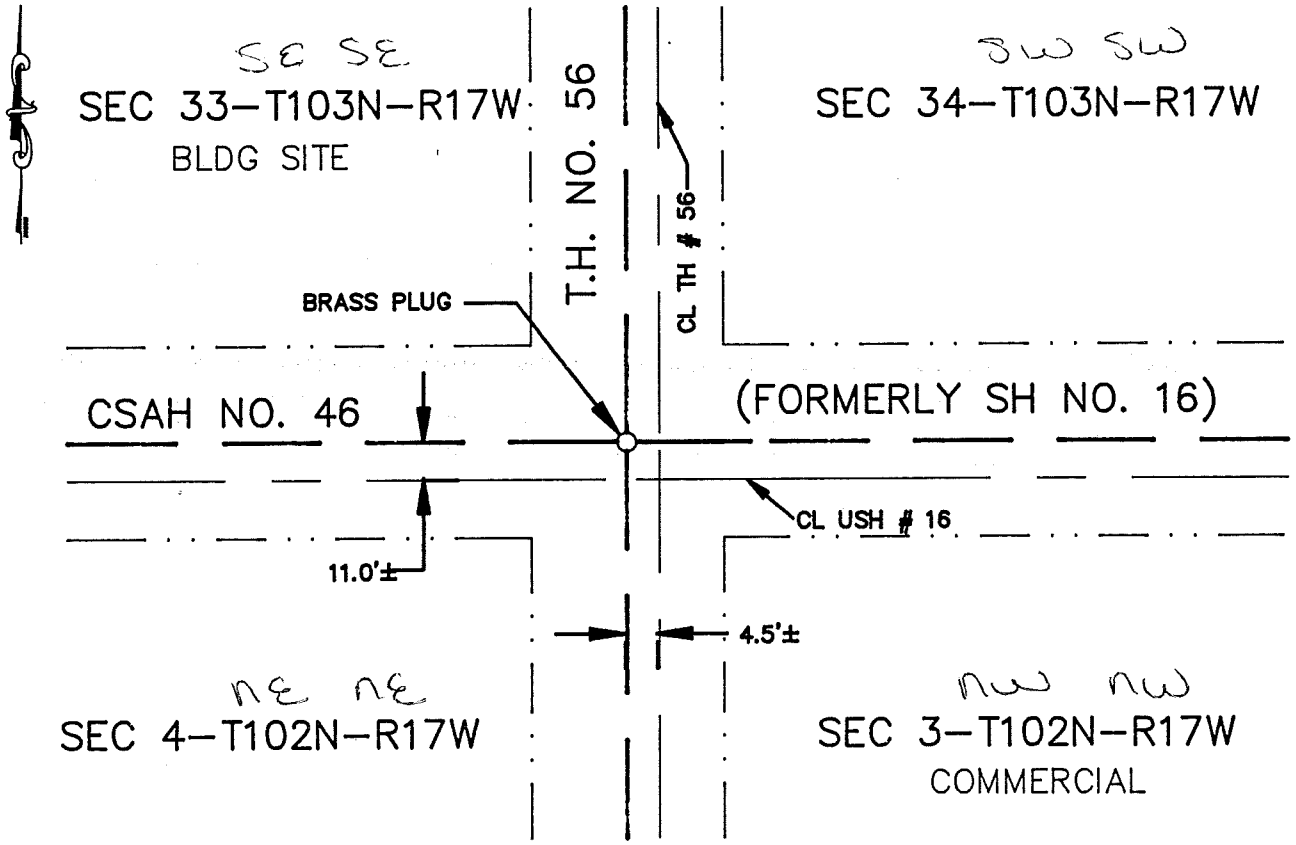

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-10-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4 p .M. on the 11 day of Sept A.D., 1996

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 447783

M.H.D. FORM NO. 2105 BOOK 92 PAGE 395 Book 92 Misc Page 395

SE Cor SEC 33-103-17

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

MNDOT TH No. 56 R/W map shows a brass plug 11' north of CL TH No. 16 and 4.5' west of CL SH No. 56.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, found a brass plug that is in accordance with MHD SH No. 56 and SH No. 16 HWY plans, 11' north and 4.5' west of the CL CL intersection TH 56 and TH 16.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 35, Township 103N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 06/09/1994 (DATE) found a 3/4" IRON, 2" WOOD STAKE AND PIPE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 06/09/1994 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

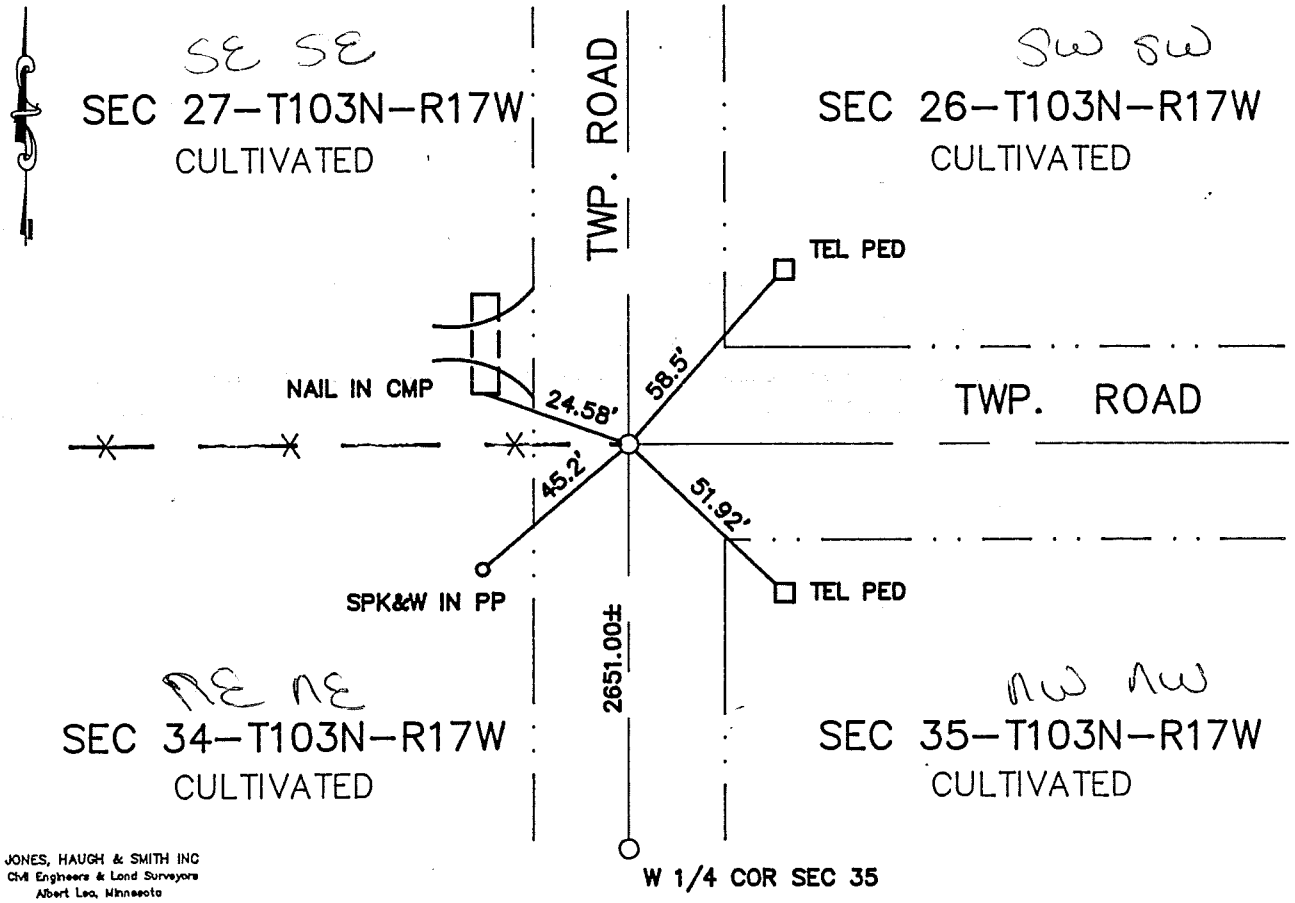

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-10-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4p .M. on the 11 day of Sept A.D., 1996

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 447786

M.H.D. FORM NO. 2105 BOOK 92 PAGE 401 Book 92 Misc Page 401

NW Cor SEC 35-103-17

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the location of 3/4" iron on road surface on the CL of township road N-S and east. Uncovered a 2" wood stake and pipe on the SW side of the wood stake. Wood stake and pipe were 2.6' south of the 3/4" iron on the road surface. Placed a cast iron monument over the wood stake 0.5"+- below the road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 35, Township 103N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 06/09/1994 (DATE) found a 5/8" IRON, BOATSPIKE, 2X2 HUB

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 06/09/1994 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

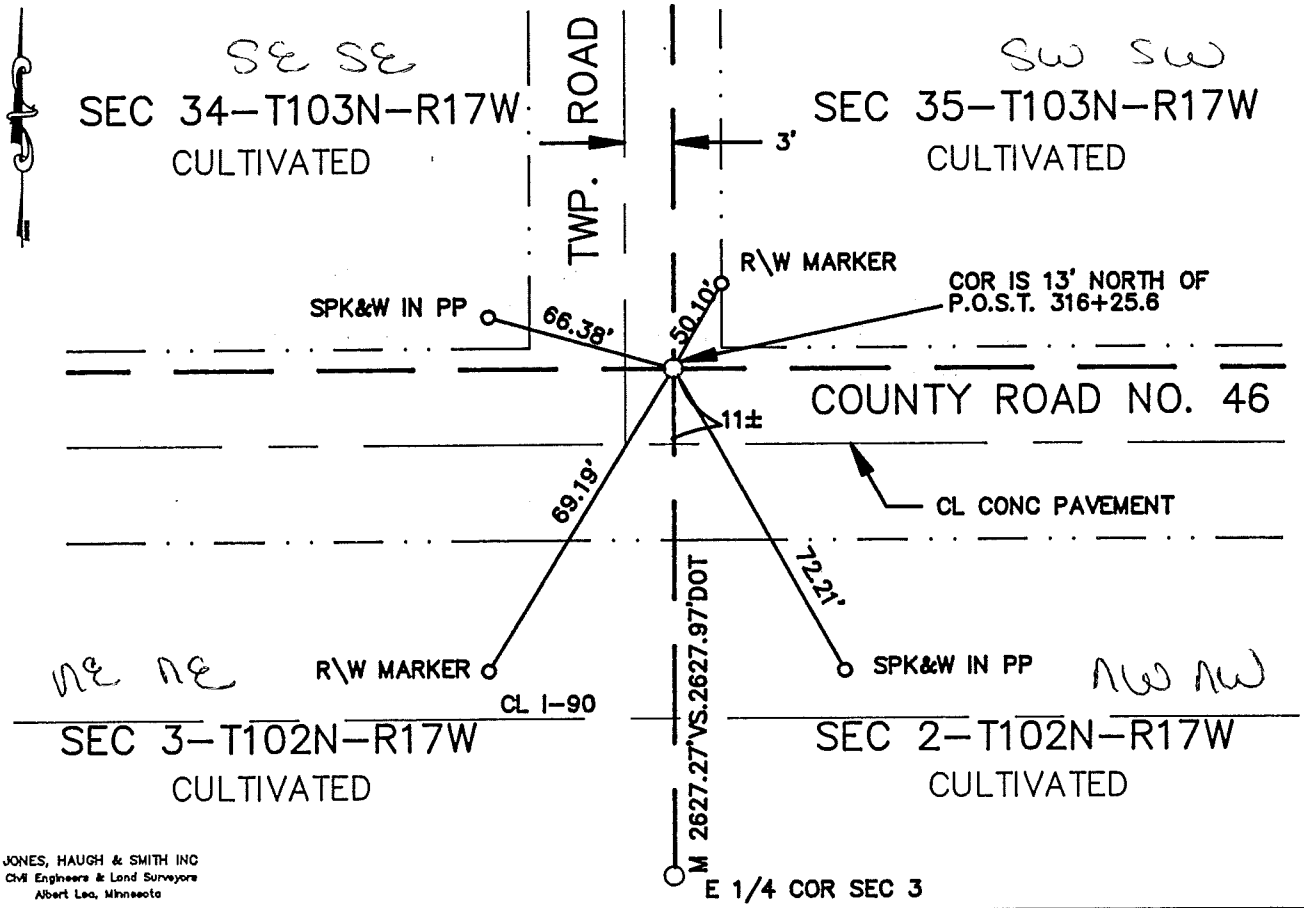

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 9-10-96 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4p .M. on the 11 day of Sept A.D., 1996

COUNTY RECORDER Charles Evans

By Susan M. Davis, Deputy

DOCUMENT NO. 447785

M.H.D. FORM NO. 2105 BOOK 92 PAGE 399

Book 92 Misc Page 399

SW Cor SEC 35-103-17

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

MN DOT I-90 R/W map shows a 2"x2' wood hub 2.5' below the road surface with a iron spike over it and a distance of 341.40' south to CL Tang. west bound lane I-90.

1930+- TH # 16 R/W map shows the location for this corner as being 13' north of P.O.S.T. 316+25.6

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe 11' north of CL of Co. Rd. 46 and 2' east of CL of township road north. Uncovered a 5/8" iron, a boat spike, and a 2"x2' wood hub. In agreement with TH #16 and I-90 R/W map locations, placed a cast iron monument inplace of wood hub.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 35, Township T103N Range R17W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 6-9-94 (DATE) found a 1" PIPE 2"BELOW ROAD SURFACE

☐ left monument as found, ☐ lowered monument, ☒ removed monument (explain)

☐ On 6-9-94 (DATE) placed a CASTIRON MON.

SKETCH OF REFERENCE TIES

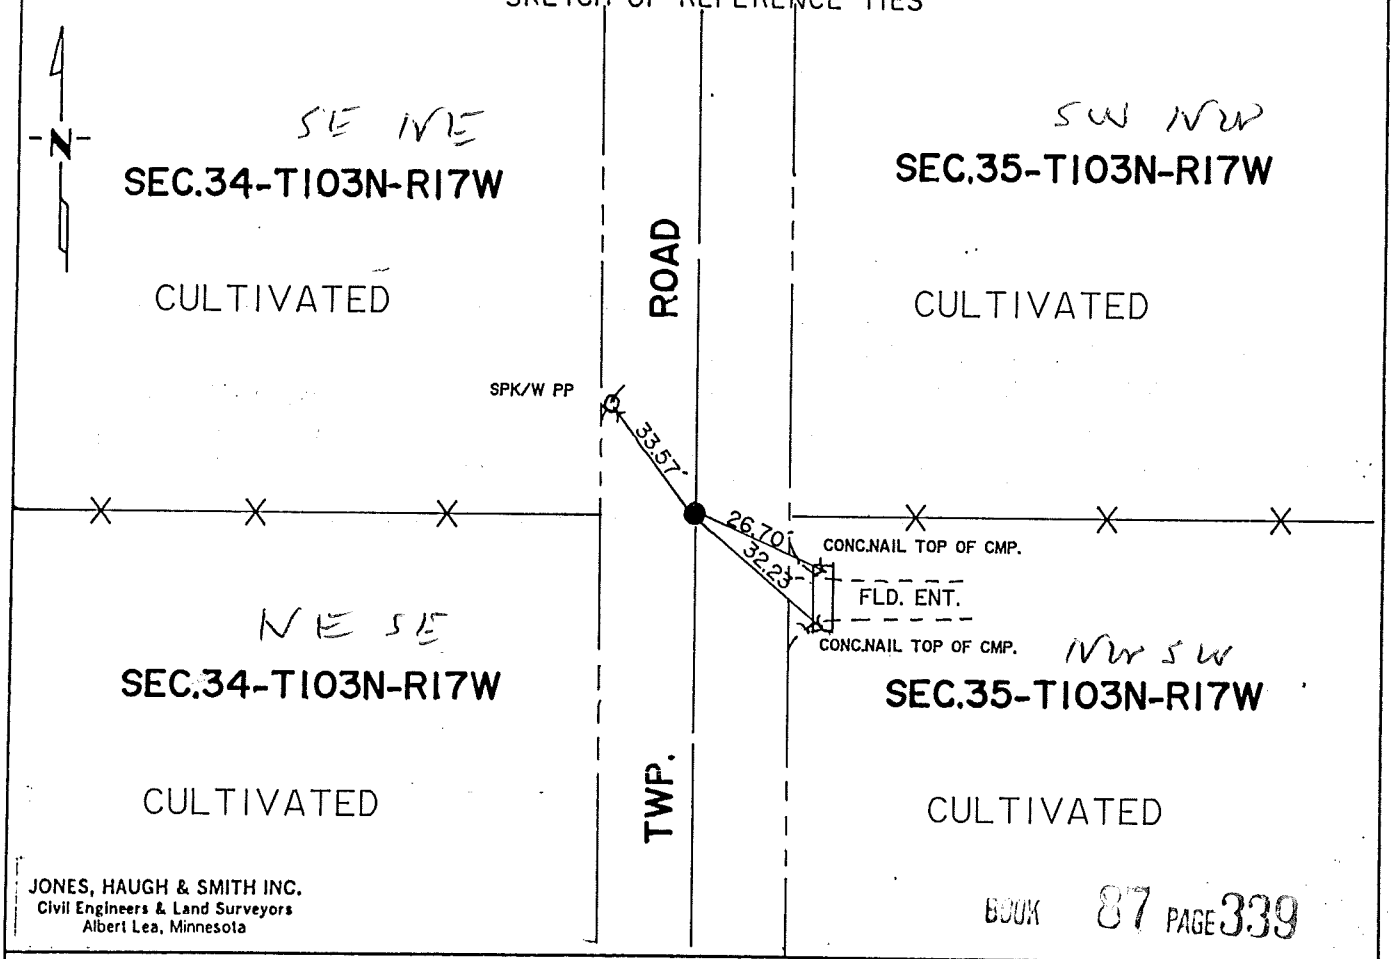

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 87 PAGE 339

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-12-95

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A .M. on the 19 day of June A.D., 1995

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 437347

Book 87 Misc Page 339

M.H.D. FORM NO. 2105

W 1/4 SEC 35-103-17

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show this corner was marked by a charred stake with a mound and trench.

The following were contacted for section corner information.

Mower County Engineering Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1994 Jones, Haugh and Smith crew, under the direction of John Schulte, Mower Co. Surveyor, RLS 13807, dug with county backhoe on CL N-S twp. road in line with a fence lines to the east and west. A 1" pipe was found 2' below the road surface. Continued digging but no further evidence was found. Accepted pipe as best evidence of original corner and set CIM near road surface. The corner is in line with road centerline N-S and with the fence lines to the east and west.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 36, Township 103N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/28/1997 (DATE) found a IRON CAPPED 15471

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/28/1997 (DATE) placed a –

SKETCH OF REFERENCE TIES

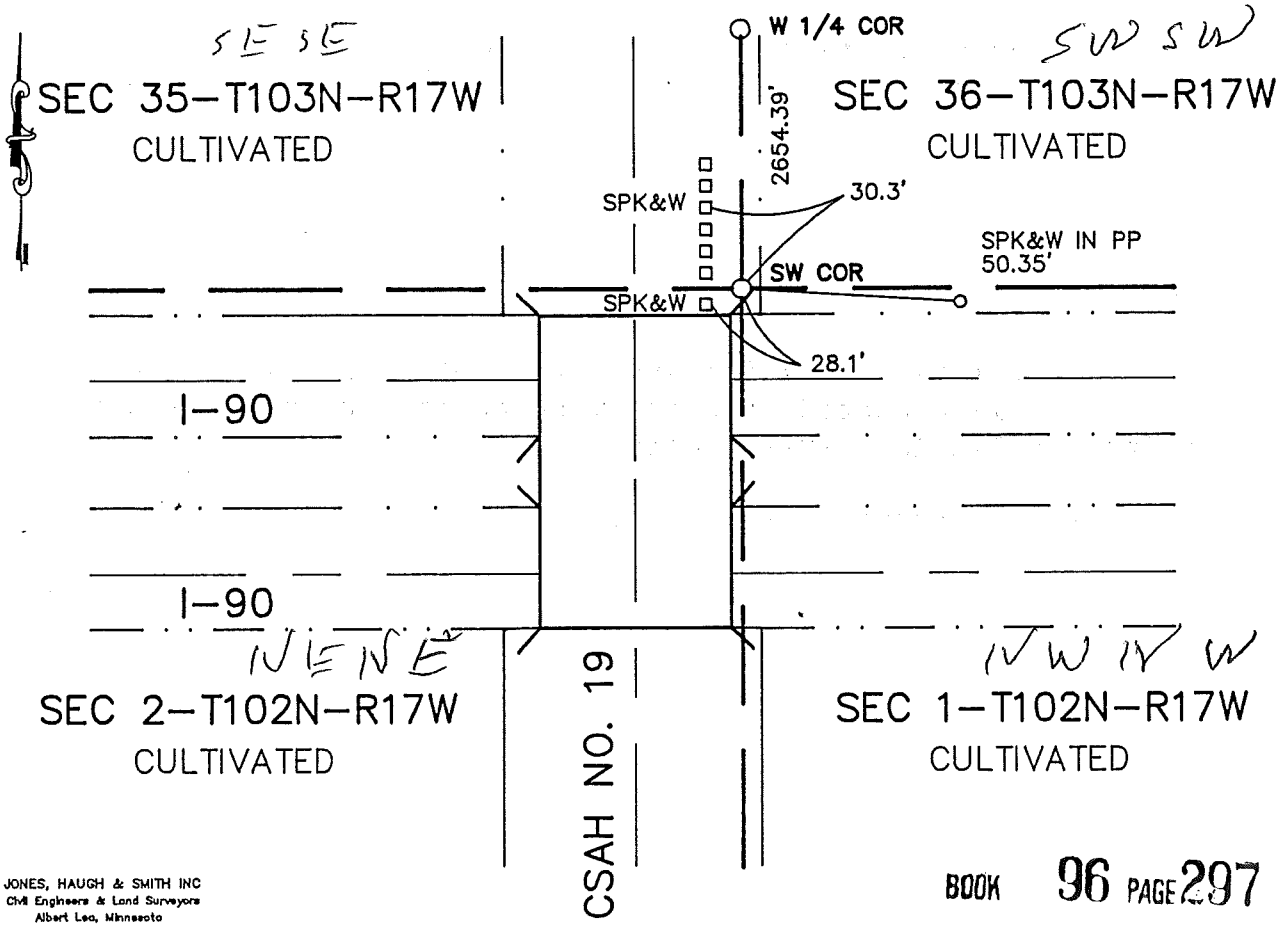

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 96 PAGE 297

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-9-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P .M. on the 10 day of Sept A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 456003

M.H.D. FORM NO. 2105

Book 96 Misc Page 297

SW Cor SEC 36-103-17

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1997 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand 2654.39' south of W 1/4 corner of section 36. Located a capped 15471 iron at this location. Iron is in agreement with I-90 R/W map and TH No. 16 R/W plans. Accepted iron at a perpetuation of original PLS corner and tied it off.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 36, Township 103N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 5-29-91 (DATE) found a 3/4"Ø x 12" iron over a 1/2"Ø x 24" iron on the south side of a pointed field stone.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 5-29-91 (DATE) placed a cast iron monument over pointed stone.

SKETCH OF REFERENCE TIES

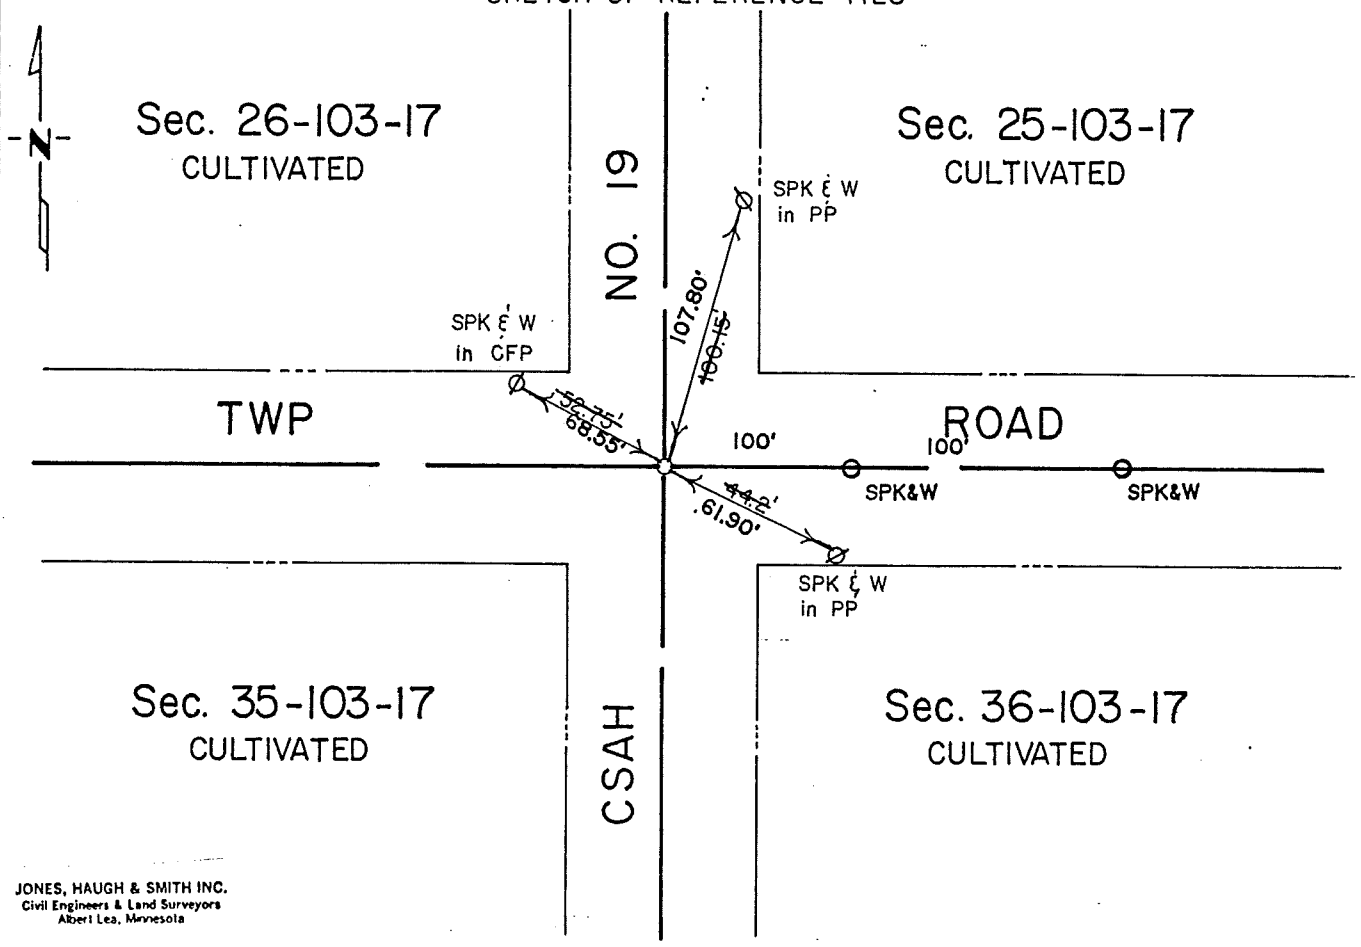

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-5-91

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Section 36-103-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1853. The government notes show a charred stake was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1940 Recorded in "A" in the office of the County Engineer it shows a 1 1/4 inch iron bar on the north side of a stone and ties were taken.

1986 Ray Tucker, RLS 15471, uncovered a 1 1/4 inch iron on the west side of the stake. The monument was left as found and a stone was set with a 1/2 inch diameter iron re-bar over stake capped RLS 15471.

1991 Jones, Haugh & Smith Inc dug with the County backhoe for grading project SAP 50-619-15 and uncovered a 3/4 inch diameter iron over a 1/2" X 24" iron re-bar on the south side of a pointed nigger head and the remains of the old wood stake was found around a 1/2" diameter iron. Left the monument as found and set a cast iron monument over a 1/2" diameter iron on the surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

1997 Re-set

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 36, Township 103N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 5-29-91 (DATE) found a 3/4"Ø x 12" iron over a 1/2"Ø x 24" iron on the south side of a pointed field stone.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 5-29-91 (DATE) placed a cast iron monument over pointed stone.

SKETCH OF REFERENCE TIES

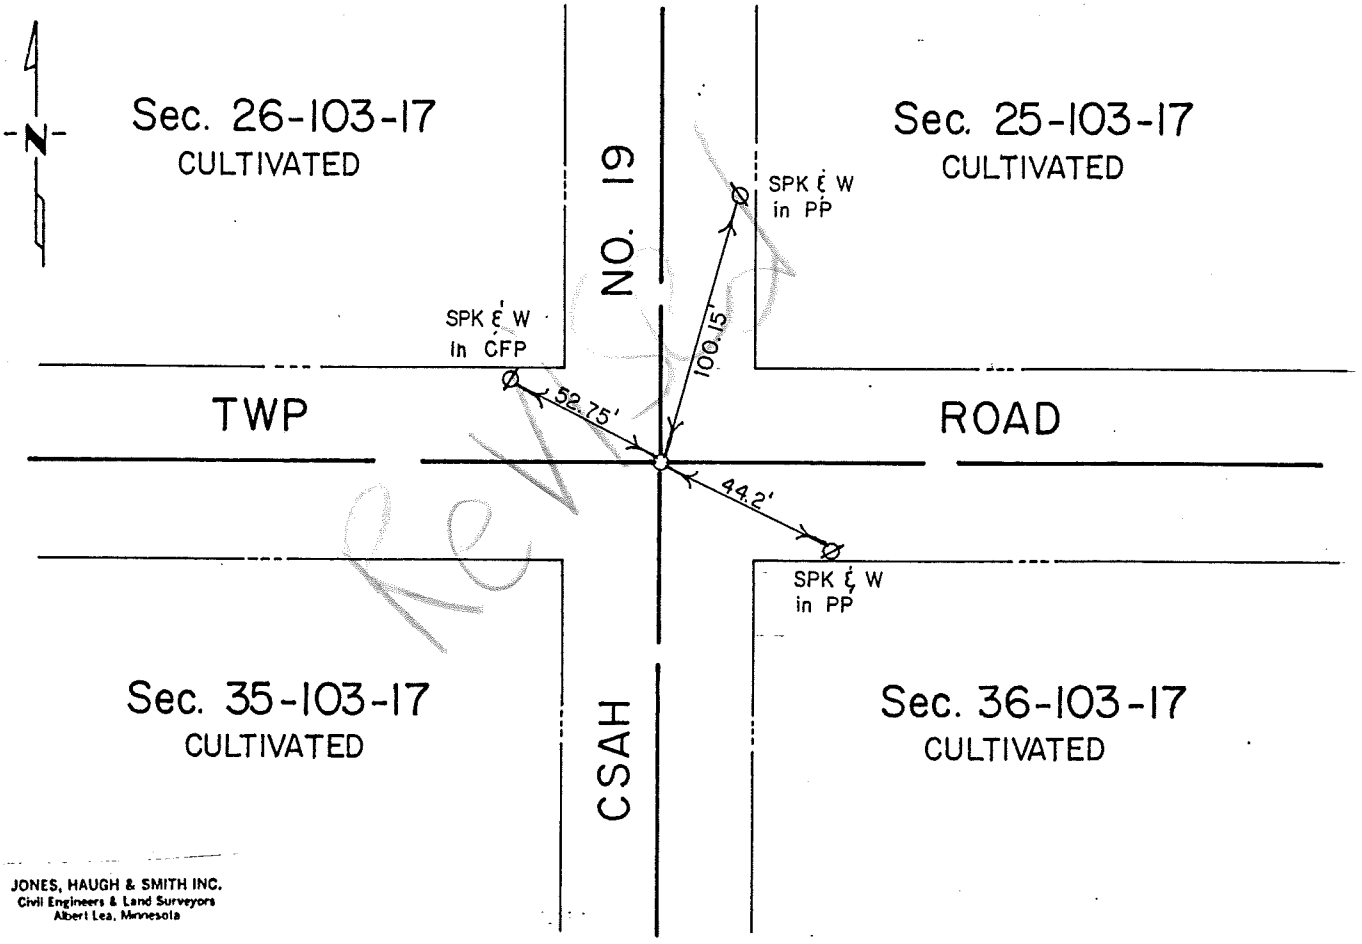

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-5-91

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Section 36-103-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1853. The government notes show a charred stake was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1940 Recorded in "A" in the office of the County Engineer it shows a 1 1/4 inch iron bar on the north side of a stone and ties were taken.

1986 Ray Tucker, RLS 15471, uncovered a 1 1/4 inch iron on the west side of the stake. The monument was left as found and a stone was set with a 1/2 inch diameter iron re-bar over stake capped RLS 15471.

1991 Jones, Haugh & Smith Inc dug with the County backhoe for grading project SAP 50-619-15 and uncovered a 3/4 inch diameter iron over a 1/2" X 24" iron re-bar on the south side of a pointed nigger head and the remains of the old wood stake was found around a 1/2" diameter iron. Left the monument as found and set a cast iron monument over a 1/2" diameter iron on the surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 36, Township 103N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-29-91 (DATE) found a 1/2"Ø x 24" re-bar 0.5' below road surface.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-29-91 (DATE) placed a cast iron monument

SKETCH OF REFERENCE TIES

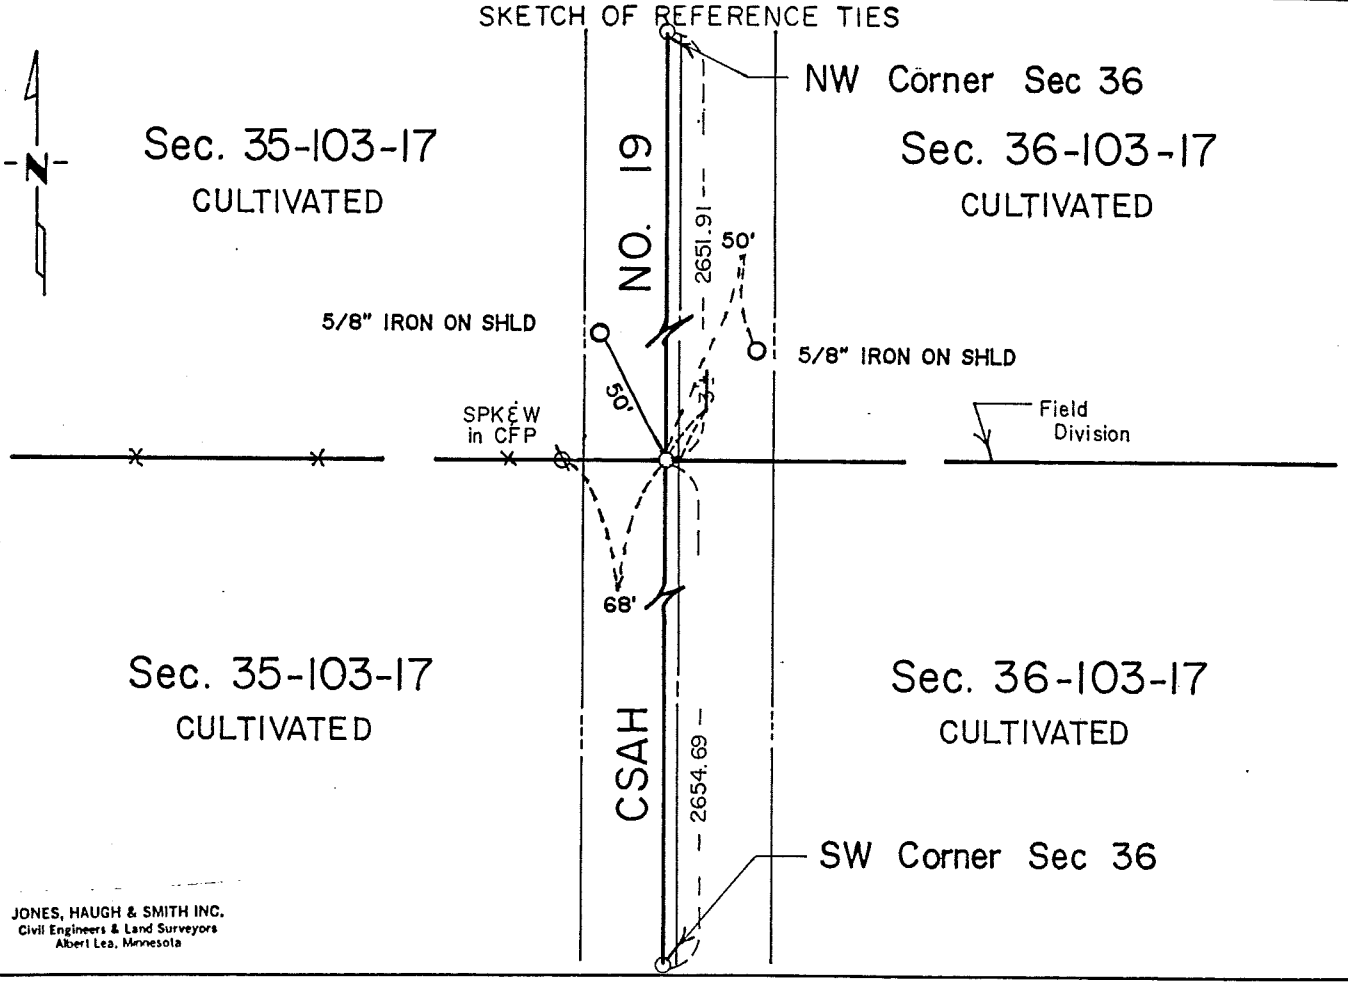

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] 6-7-91
SIGNATURE DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Section 36-103-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1985 Ray Tucker, RLS 15471, uncovered a 3/4 inch diameter iron 4 feet, more or less, west of centerline of N-S road and reset 1/2" diameter x 24" iron capped RLS 15471 and the following ties were taken and recorded in Book "A" in the office of the County Engineer:
28.25' West to spk in fence post
75.0' West to 3/4" diameter iron
33.0' East to 3/4" diameter iron

1991 Jones, Haugh & Smith Inc dug with the County backhoe for grading project SAP 50-619-15 and uncovered a 3/4 inch diameter iron over a 1/2" X 24" iron re-bar, continued digging and found no further evidence of a public land survey corner. Assumed any perpetuation of corner would have been destroyed in 1985 by Tuckers excavation. Therefore accepted 1/2" diameter iron and set a cast iron monument at the same location.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

1997 Re-set

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 36, Township 103N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-29-91 (DATE) found a 1/2"Ø x 24" re-bar 0.5' below road surface.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-29-91 (DATE) placed a cast iron monument

SKETCH OF REFERENCE TIES

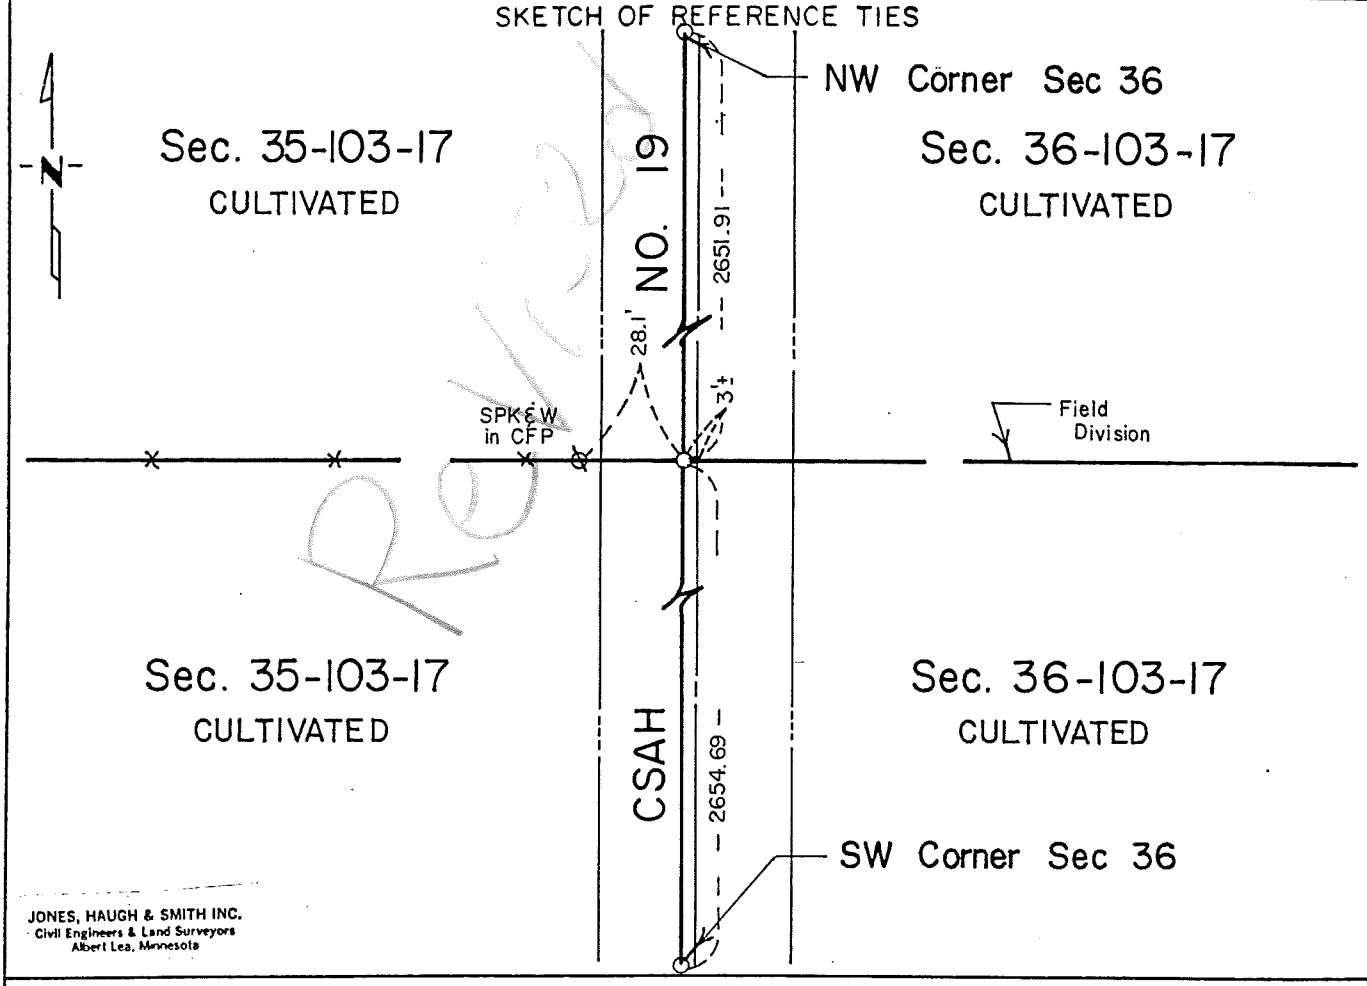

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-7-91

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Section 36-103-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1985 Ray Tucker, RLS 15471, uncovered a 3/4 inch diameter iron 4 feet, more or less, west of centerline of N-S road and reset 1/2" diameter x 24" iron capped RLS 15471 and the following ties were taken and recorded in Book "A" in the office of the County Engineer:
28.25' West to spk in fence post
75.0' West to 3/4" diameter iron
33.0' East to 3/4" diameter iron

1991 Jones, Haugh & Smith Inc dug with the County backhoe for grading project SAP 50-619-15 and uncovered a 3/4 inch diameter iron over a 1/2" X 24" iron re-bar, continued digging and found no further evidence of a public land survey corner. Assumed any perpetuation of corner would have been destroyed in 1985 by Tuckers excavation. Therefore accepted 1/2" diameter iron and set a cast iron monument at the same location.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.