Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 22, Township 101N, Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-14-91 (DATE) found a 2 1/2"Ø brass pipe capped RLS 4423.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-14-91 (DATE) placed a cast iron monument over pipe found.

SKETCH OF REFERENCE TIES

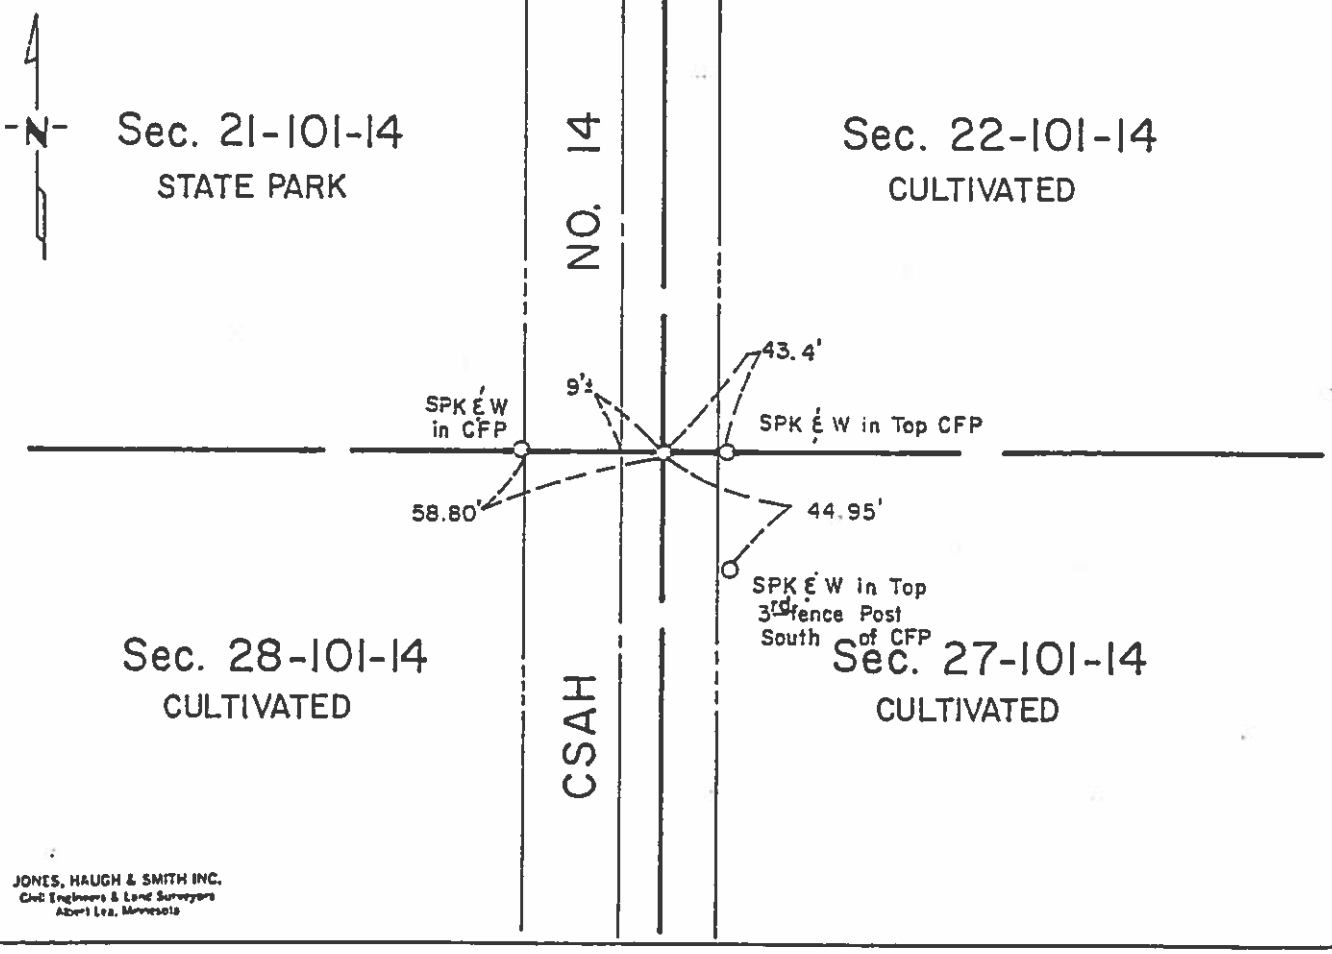

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-16-91

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Section 22-101-14

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench. The following ties were taken:

10" Burr Oak	S 63 3/4° W	340 links	(224.40 ft)
6" Burr Oak	S 81 1/4° E	282 links	(270.2 ft)
10" Burr Oak	N 35 3/4° W	330 links	(217.80 ft)

The following information was obtained to support evidence of a perpetuation of the original PLS corner.

1950 County grading plan shows monument inplace for grading project.

1967 C.D. Hosfield, RLS 4423 uncovered a concrete monument and placed a 2 1/2" diameter brass capped pipe stamped RLS 4423 and filed a Certificate Of Location at the office of the County Engineer.

1991 Jones, Haugh & Smith Inc crew uncovered 2 1/2" brass capped pipe 9' more or less east of N-S centerline road. Measurements were checked to other Hosfield monuments to verify location. Placed a cast iron monument over pipe.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.