Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 13, Township 103N, Range 14W, 5th P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☐ On 5-24-91 (DATE) found a 2"x1 1/2" iron 1.0' below surface

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-24-91 (DATE) placed a cast iron monument over iron found.

SKETCH OF REFERENCE TIES

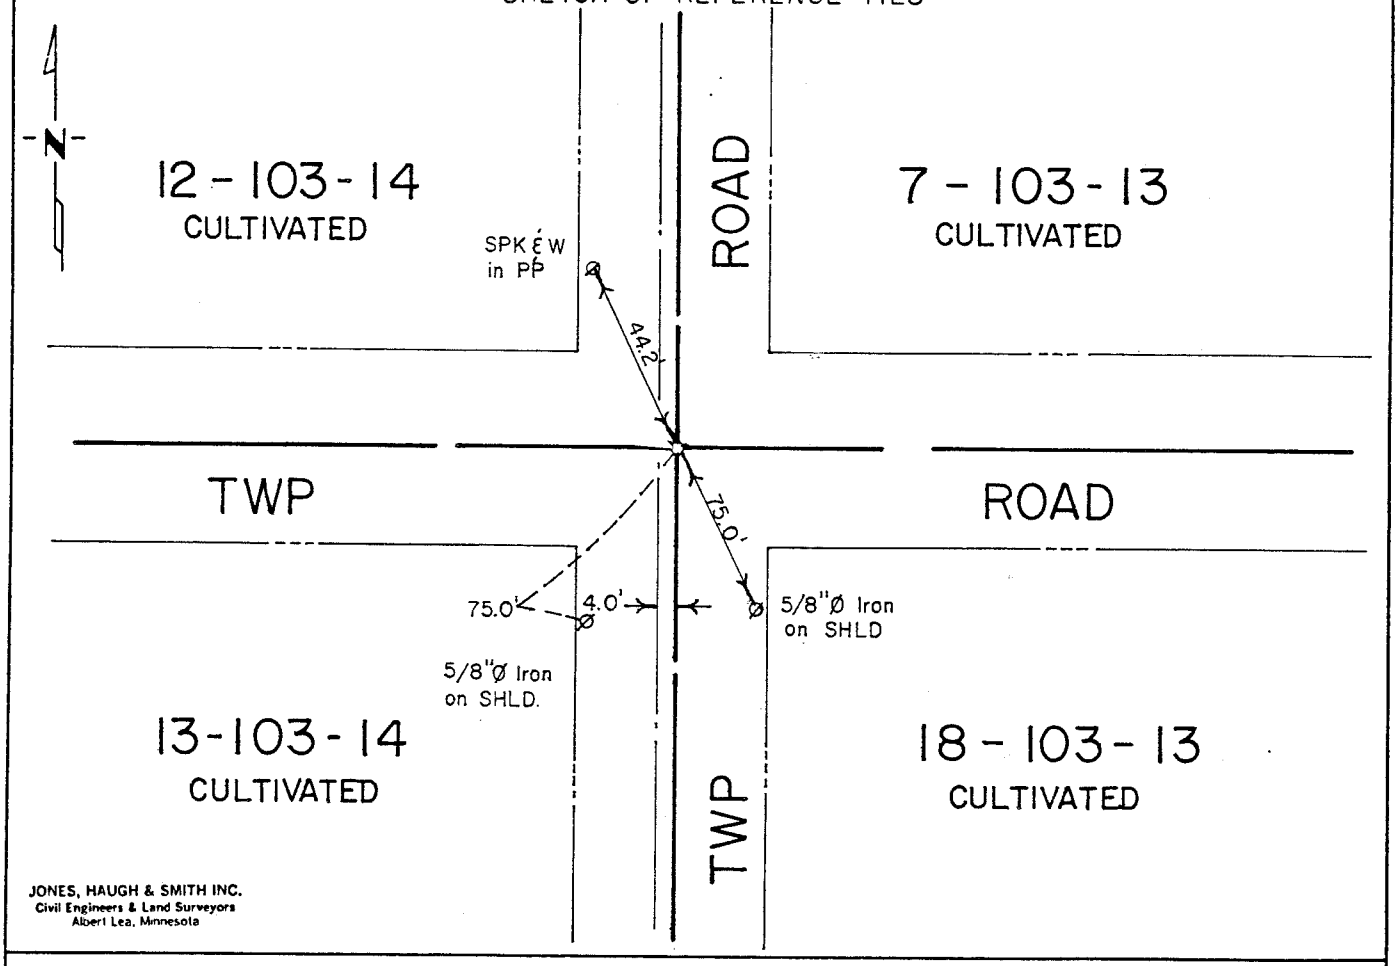

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-30-91

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NE corner Section 13-103-14

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying
Filmore County Surveyor
Minnesota Dept. of Transportation

1888 Clausen, Mower County Surveyor from 1880-1892, uncovered Government post during a survey of the NE 1/4 of Section 13.

Date Unknown Irving Bacon set a 1 1/4" x 1 1/4" x 30" iron bar for the corner.

1975 Filmore County Surveyor found a 1 1/4" x 1 1/4" x 30" iron and accepted it as a perpetuation of the original corner. Ties were taken and a Certificate of Location was filed in Filmore County.

1991 Jones, Haugh & Smith Inc crew uncovered an iron monument accepted as the corner by the Filmore County Surveyor in 1975 for bridge project L4952 over Deer Creek. Placed a cast iron monument over the iron on the road surface and new ties were taken.

The monument agrees with past records and fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.