Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 24, Township 104N Range 16W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-25-93 (DATE) found a 3"ø ALUM. MONUMENT

■ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-25-93 (DATE) placed a LEFT MONUMENT AS FOUND

SKETCH OF REFERENCE TIES

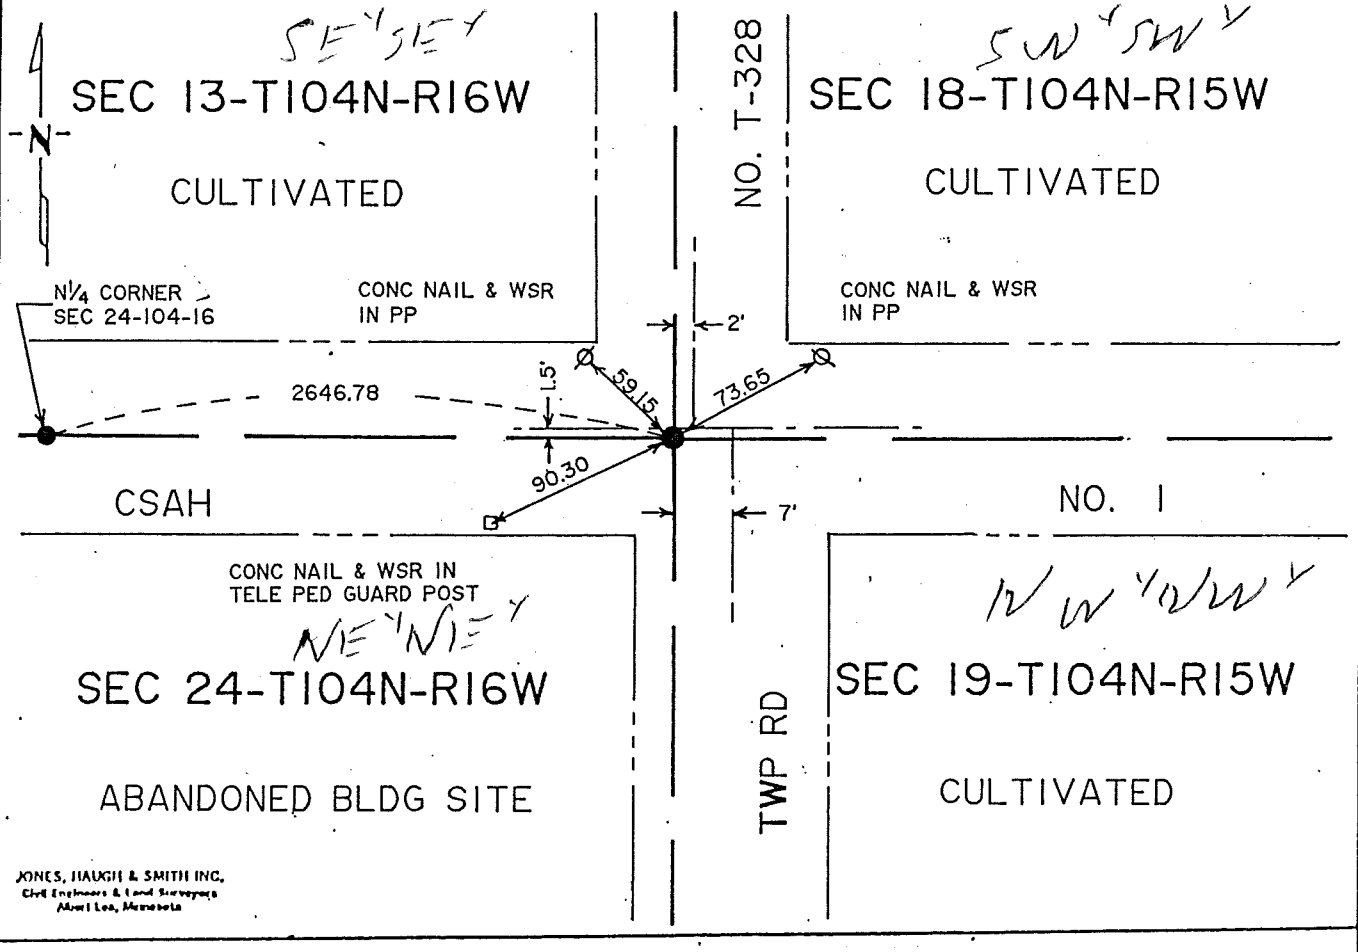

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Mankato, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-23-93

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 8:1 .M. on the 25 day of June A.D., 1993

COUNTY RECORDER Amanda Conger

By Marlene Marten, Deputy

DOCUMENT NO. 121751

Bk 80 Pg 145

M.H.D. FORM NO. 2105

BOOK 80 PAGE 145

STATEMENT OF EVIDENCE

NE corner Sec 24-104-16

This corner was originally established by Deputy Surveyor of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder's Office
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1960 Mower County Highway Department Book 1 and County State Aid Highway No. 1 Road Plans indicate a concrete monument inplace.

No Date Ray Tucker, RLS 15471, found the concrete monument noted and placed a 3" diameter aluminum monument above monument found.

1993 Jones, Haugh & Smith crew under the direction of John Schulte IV, RLS 13807, dug with County backhoe a 3'x6'x10' hole and found the 3" diameter aluminum monument noted by Tucker. Therefore we accepted aluminum monument found as the perpetuation of the original public land survey corner and left the monument as found.

The monument found fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.