Index No. p82 "I"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 9, Township 104N, Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On Sept. 1986 (DATE) placed a 5/8" ϕ x 24" iron

SKETCH OF REFERENCE TIES

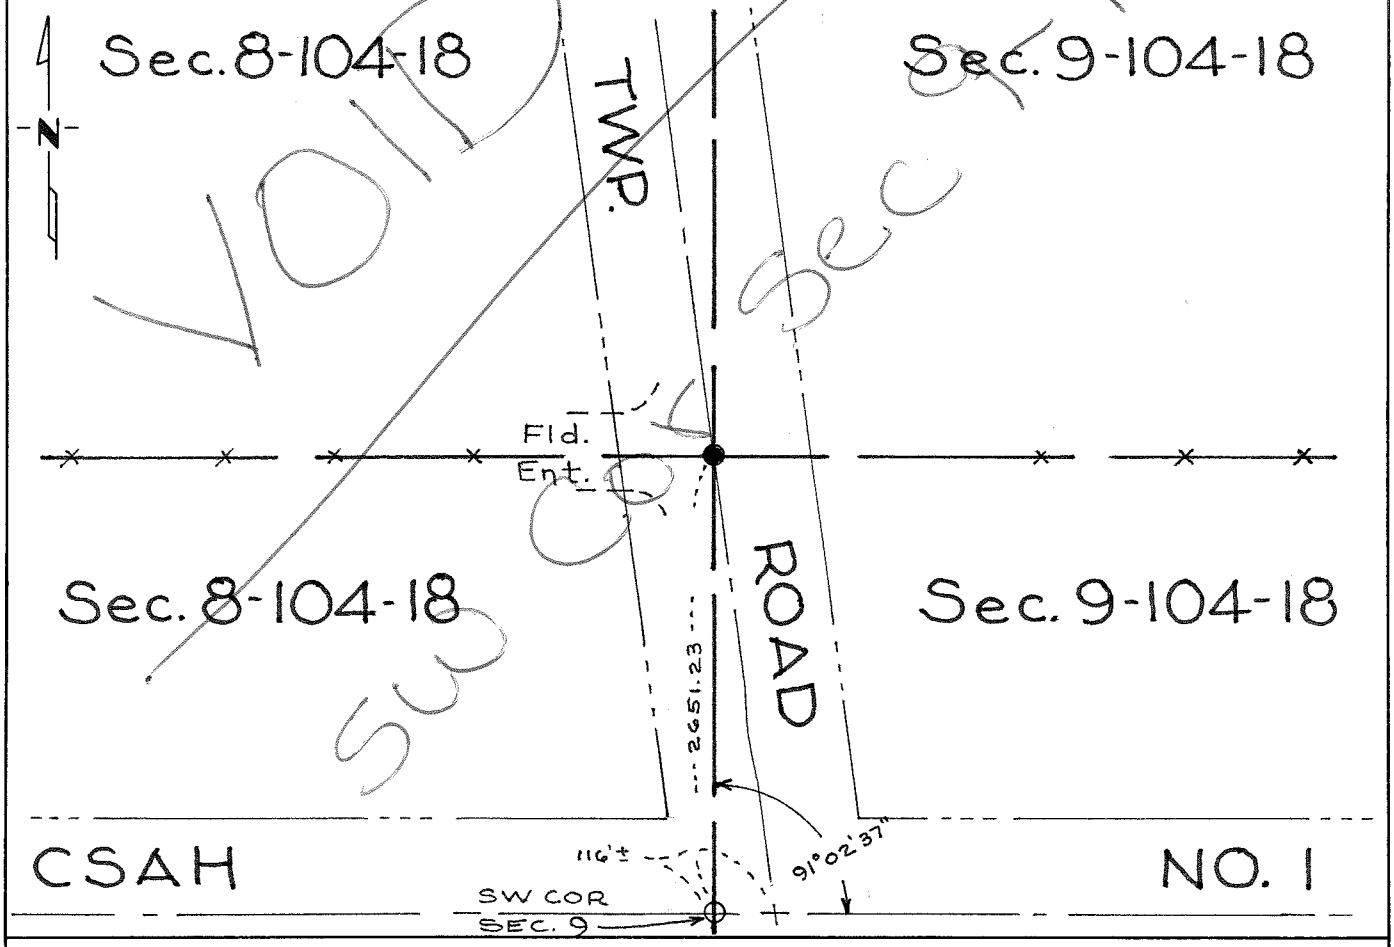

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] 3-8-89
SIGNATURE DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Sec 9-104-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set and a charred stake was deposited in a mound of earth during original public land survey.

In 1986 Jones, Haugh & Smith Inc contacted the following for section corner information:

Mower County Highway Dept.
Tucker Land Surveying

No information or surveys in the area were found to have been done.

In September 1986 Jones, Haugh & Smith Inc crew, together with the Mower County Highway Department backhoe operator dug on the centerline of north-south road in line with fence west. An 8 x 40 long hole was dug and no evidence of the public land survey corner or a perpetuation thereof was found. Therefore after the completion of a traverse around the section and analysis of existing fence and occupation lines a fence line occupying the north line of the SE 1/4 was extended westward to intersect with the centerline of the north-south township road.

The position fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh & Smith.