TIE BOOK P 108 Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 16, Township 103, Range 17, _____ P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On ~~Nov. 20, 1978~~ (DATE) placed a Chiselled "X" in concrete

SKETCH OF REFERENCE TIES

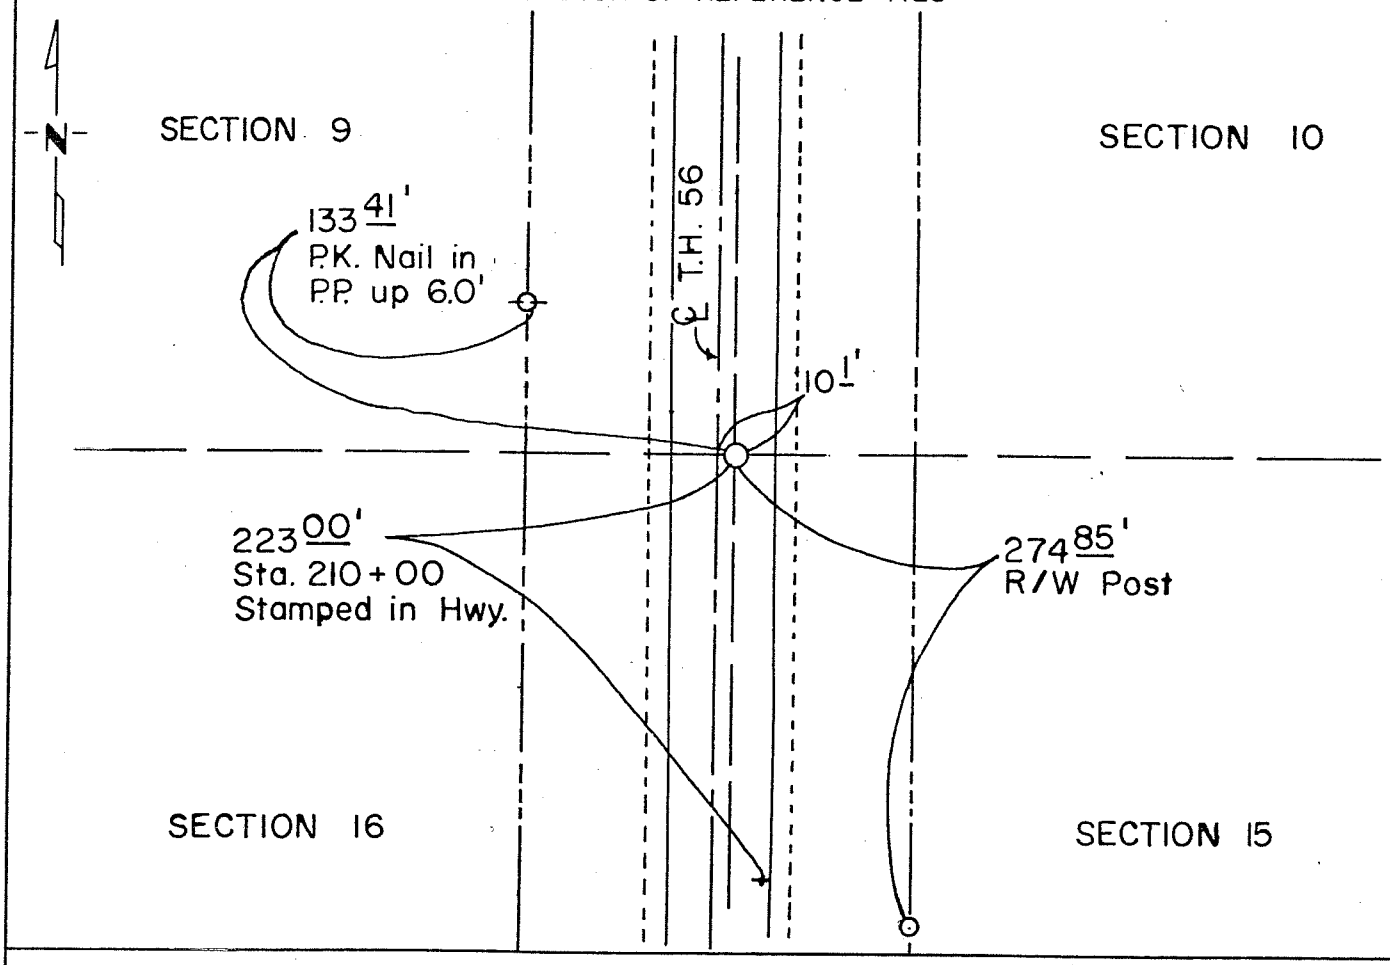

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald A. Olson (SIGNATURE) 3-13-80 (DATE)

Registration No. 11009

☒ Land Surveyor, ☒ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the Recorder's office at 3:00 P.M. on the 13th day of March A.D., 19 80

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. 343776

M.H.D. FORM NO. 2105

Statement of Evidence:

NORTHEAST CORNER SECTION 16, TOWNSHIP 103 NORTH, RANGE 17 W, 5th P.M.

1854 William Anderson, Deputy Surveyor, set the corner in the original Public Land Survey.

1937 Minnesota Department of Transportation graded T.H. 56 through this area. No evidence of the corner was found.

1973 Minnesota Department of Transportation constructed a concrete pavement over the corner. A search was made but no evidence of the corner was found.

1978 Zenk Engineering, Inc. made an electronic survey and search of the area around this corner, with a magnetic locator, and no evidence of any metal monument at this location. Excavation was not made through the concrete highway.

An analysis of the record data gives no indication of monument perpetuation for over 40 years. The corner was restored by obliterated methods. The corner was set by doubling the distance from the occupied N 1/4 corner of Section 15 over the occupied location of the N 1/16 corner of the NW 1/4 of Section 15 and by doubling the distance between the E 1/4 Corner of Section 16 and the occupied E 1/16 Corner of the NE 1/4 of Section 16. This location agreed with other occupation lines in Section 16 and is accepted as the corner of the original Public Land Survey.

For details of the analysis and electronic survey data, contact Zenk Engineering, Inc., Albert Lea, Minnesota 56007