Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 32, Township 101N, Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 7-18-94 (DATE) found a cast iron monument. Monument removed because of road construction.

☐ left monument as found, ☐ lowered monument, ☒ removed monument (explain)

☒ On 8-23-94 (DATE) placed a cast iron monument

SKETCH OF REFERENCE TIES

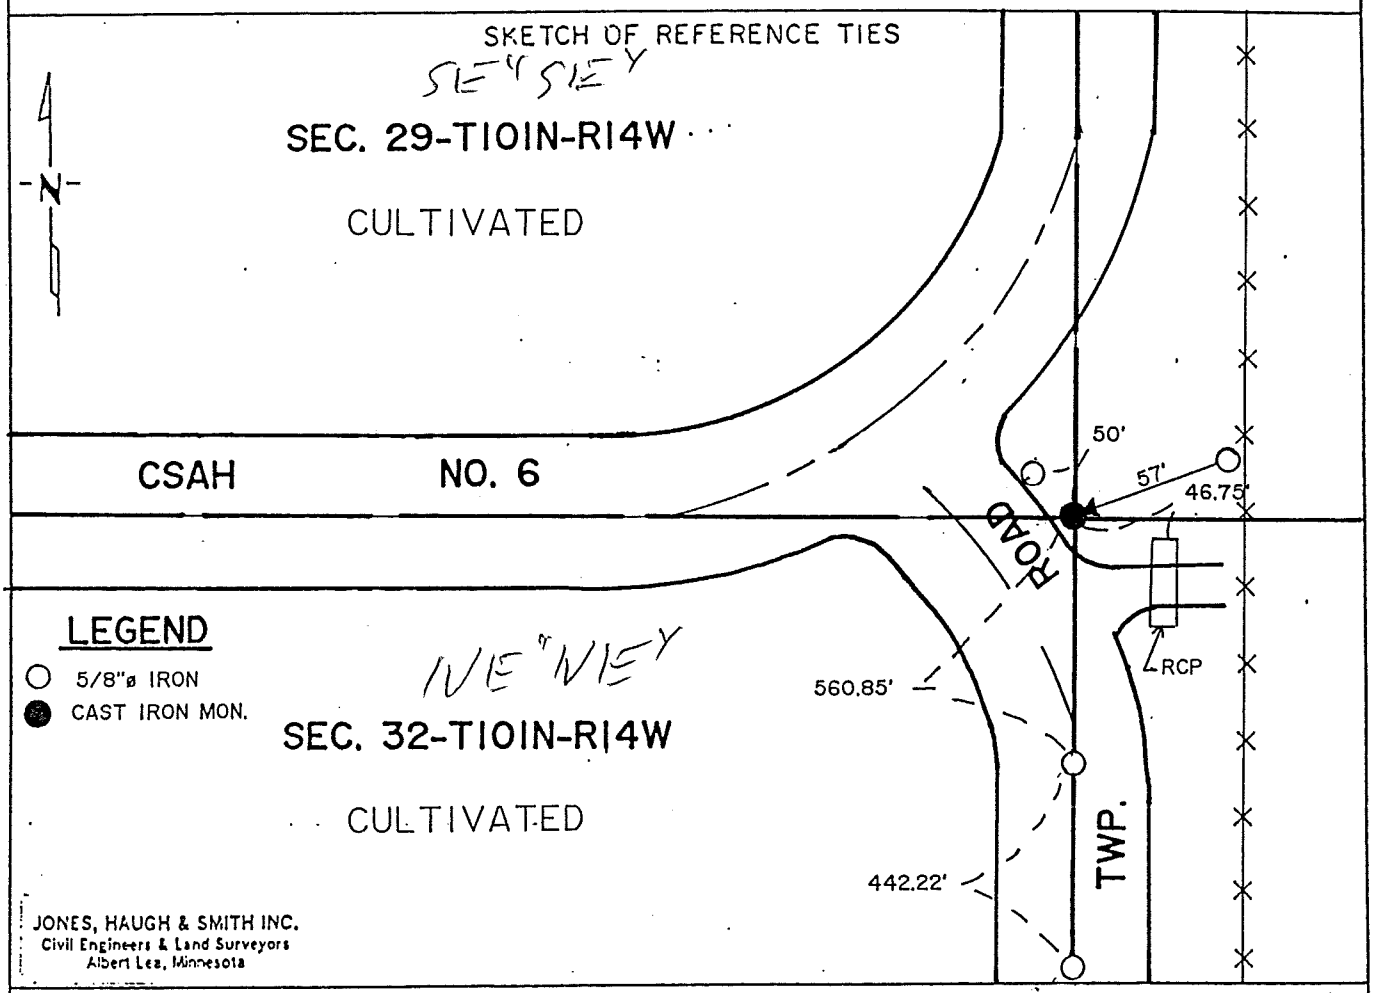

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-12-94

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 13 day of Sept A.D., 1994

COUNTY RECORDER Charles Enger

By Marlene Martin, Deputy

DOCUMENT NO. 431941

Bk 84 Pg. 458

M.H.D. FORM NO. 2105

BOOK 84 PAGE 458

STATEMENT OF EVIDENCE

N 1/4 corner Section 32-101-14

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

Mower County Highway Department grading plans show a concrete monument at the corner.

Oct 1991 Jones, Haugh & Smith crew dug with County backhoe and found large old bridge spike driven into old wood post two feet deep in virgin soil. Set cast iron monument over found spike.

July 1994 Corner was to be destroyed by County State Aid Highway No. 6 road grading. Therefore we located the corner and retied it.

Aug 1994 Jones, Haugh & Smith crew re-set corner using ties from 7/18/94 and placed 5/8" diameter cast iron monument over on shoulder of Township Road.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 81 PAGE 459