Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 22, Township 101N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 09/20/1996 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 09/20/1996 (DATE) placed a CAPPED 5/8" IRON #22705

SKETCH OF REFERENCE TIES

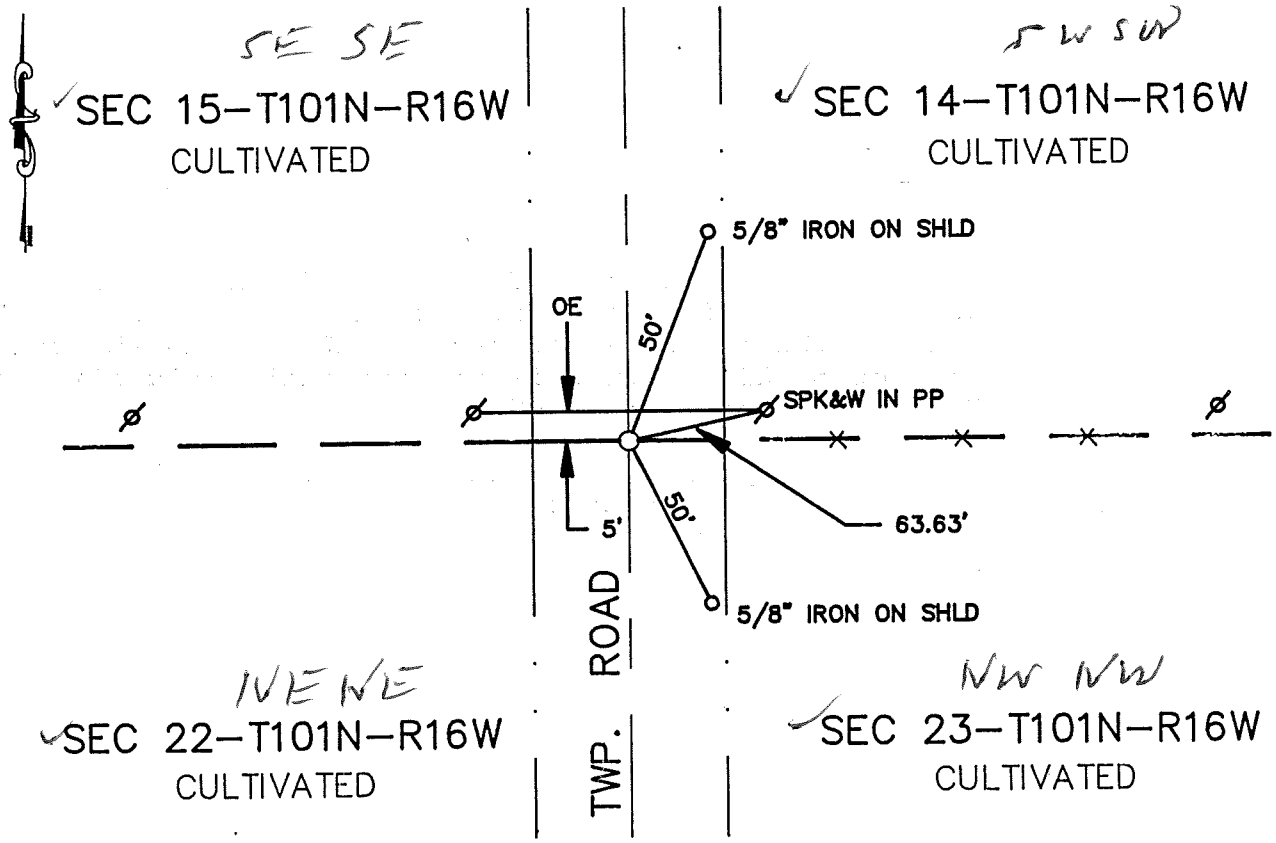

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 95 PAGE 573

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-10-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 15 day of July A.D., 1997

COUNTY RECORDER Charles Enzer

By Susan M. Davis, Deputy

DOCUMENT NO. 454661

M.H.D. FORM NO. 2105

Book 95 Misc Page 573

NE Cor SEC 22-101-16

This corner was originally established by Deputy Surveyor Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the centerline of township road N-S and in line with line fence east. Dug to virgin soil and found no evidence of original PLS corner. Accepted centerline of township road and line fences as the best perpetuation of original PLS corner and placed a 5/8" iron capped 22705 at this location.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.