Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 29, Township 101N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 10-26-90 (DATE) found a stone 0.5' deep with an "X" scribed AOF 1854 at intersection of a fence line S-E.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10-26-90 (DATE) placed a 5/8"Ø iron capped (13807) on North side of stone found and 1.2' North of corner fence post.

SKETCH OF REFERENCE TIES

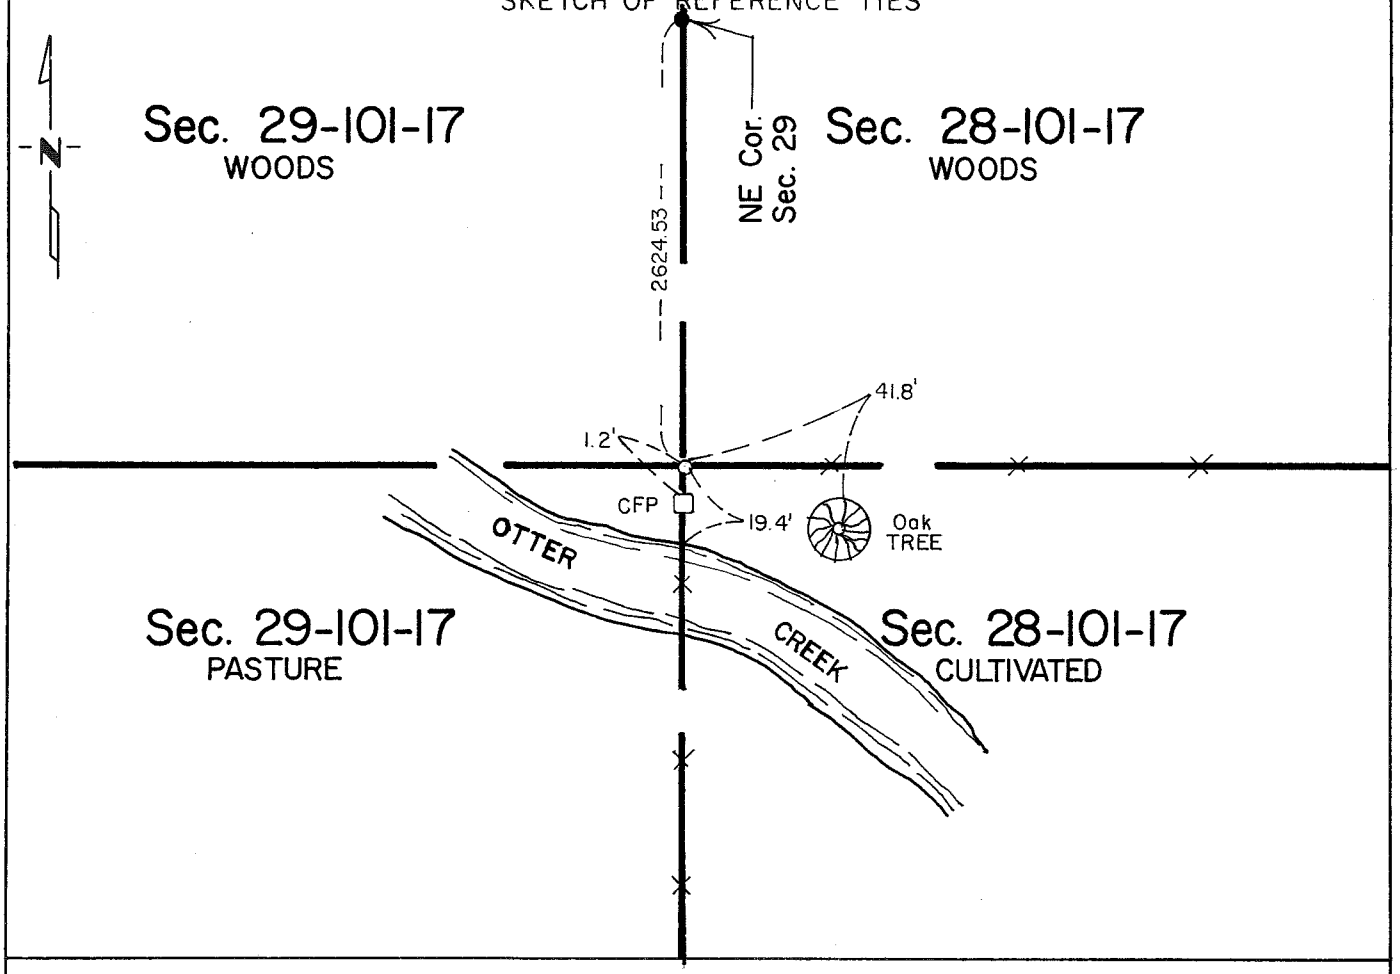

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ 1-8-91
SIGNATURE DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

E 1/4 corner Sec. 29-101-17

This corner was originally established by Deputy Surveyor Charles Phipps & Edward Fitzpatrick of the U.S. General Land Survey Office in 1854. The government notes show this corner was marked with a wood post and stone. The following ties were taken:

18" Burr Oak	N 12 W	40 links (26.40')
20" Black Oak	S 3 1/2 E	48 links (31.68')

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorders Office

1879 Records of C.E. Clausen, Mower County Surveyor, show a 14" x 10" x 4" stone was found scribed A.O.F. 1854 during a survey of the N 1/2 of Section 29 and chaining notes were shown.

1990 Jones, Haugh & Smith crew found a 14" x 10" x 4" stone marked with an "X" in the center and scribed AOF 1854 at intersection of south-east fence line and placed a 5/8" diameter iron (capped 13807) on north side of monument found.

Corner found fits occupation and past records of Clausen in 1879 and is accepted as best evidence of a perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.