Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 11, Township 101N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 4-18-91 (DATE) found a 5/8"Ø iron 0.8' below road surface.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 4-18-91 (DATE) placed a cast iron monument over 5/8"Ø iron found.

SKETCH OF REFERENCE TIES

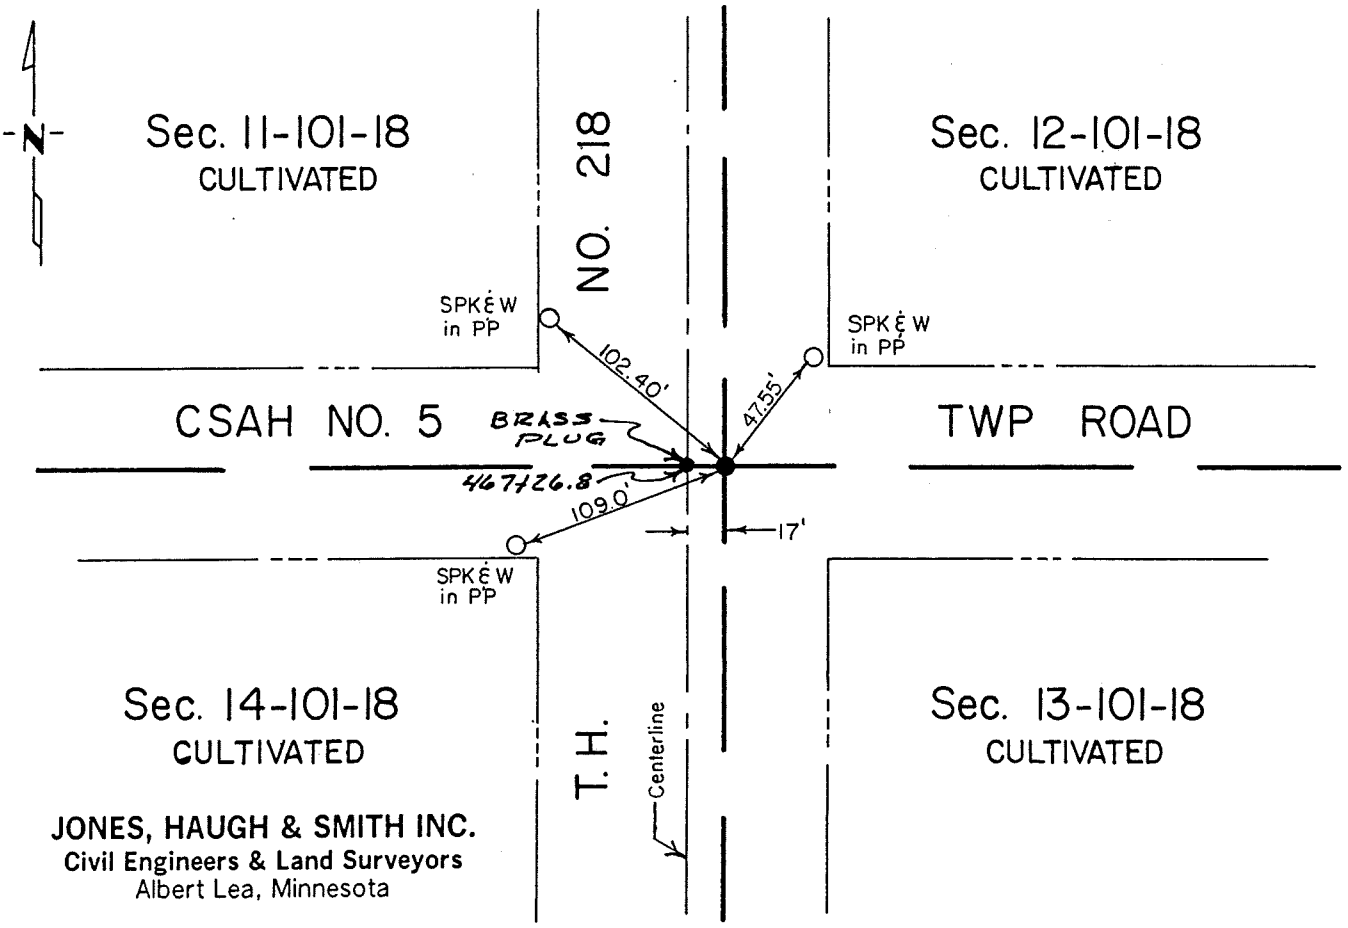

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-9-91

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SE corner Section 11-101-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1853. The government notes show a wood post and a charred stake were set with a mound of earth and trench.

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1972 Jones, Haugh & Smith Inc. crew placed a 5/8" diameter iron using Highway Sta. from T.H. #218 R/W map which shows corner at Sta. 467 + 26.8 and 17.0'E of centerline PI (brass plug) which was located at time of survey in NE 1/4 SE 1/4 Sec. 11-101-18. The following ties were taken:

Spk & W PP NE 47.4'
Spk & W CFP SE 50.2'
Brass plug W 17.0'

1991 Jones, Haugh & Smith Inc. crew under the direction of John Schulte uncovered a 5/8" diameter iron 0.8' below road surface for Mower County Highway Department. Grading project on County State Aid Highway #5 SAP #50-605-10. Placed a cast iron monument over iron found and new ties were recorded.

The monument fits occupation and road centerlines within the section and agrees with past records as best evidence of a perpetuation of the original public land survey corner.