Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 22, Township T102N Range R14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 06/26/1995 (DATE) found a ALUMINUM MONUMENT

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On – (DATE) placed a –

SKETCH OF REFERENCE TIES

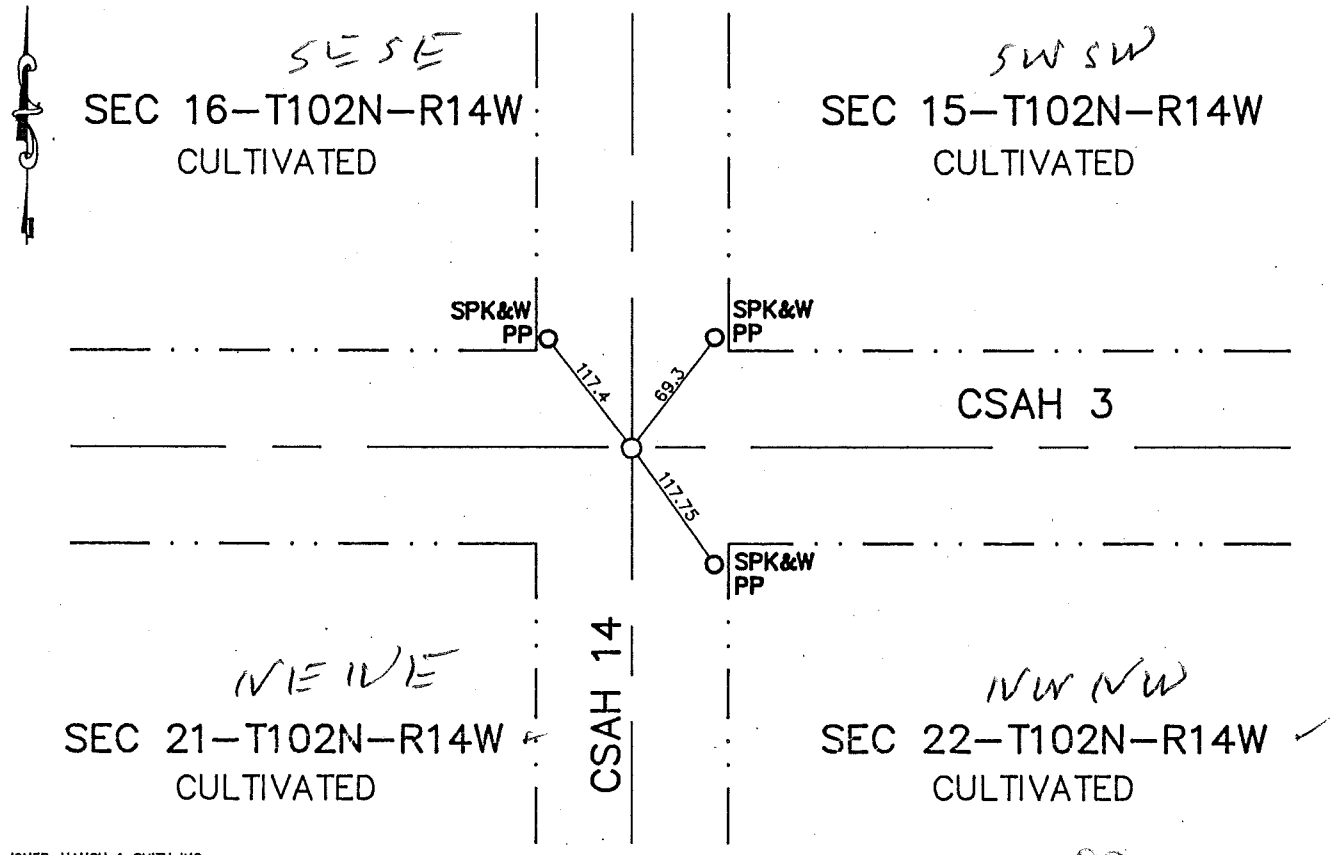

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 88 PAGE 65

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-7-95

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4 P.M. on the 8 day of Aug A.D., 1995

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 438496

M.H.D. FORM NO. 2105

BK 88 Misc Pg 65

NW Cor SEC 22-102-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1970 Mower County records show a magnetic monument in place over a stone.

1995 Jones Haugh and Smith crew, under direct supervision of John Schulte, Mower County Surveyor RLS 13807 found an aluminum monument at the surface. Speaking with the backhoe operator, it was learned that Ray Tucker had dug the corner a few years ago. Seeing that the bituminous had been cut, and that an excavation had been made at this corner with a backhoe, the monument was accepted as a perpetuation of the true PLS corner. The monument was left in place and ties were taken.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.