Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 4, Township 102 Range 15, ____ P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 7-31-02 (DATE) found a Concrete Monument

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 7-31-02 (DATE) placed a CIM

SKETCH OF REFERENCE TIES

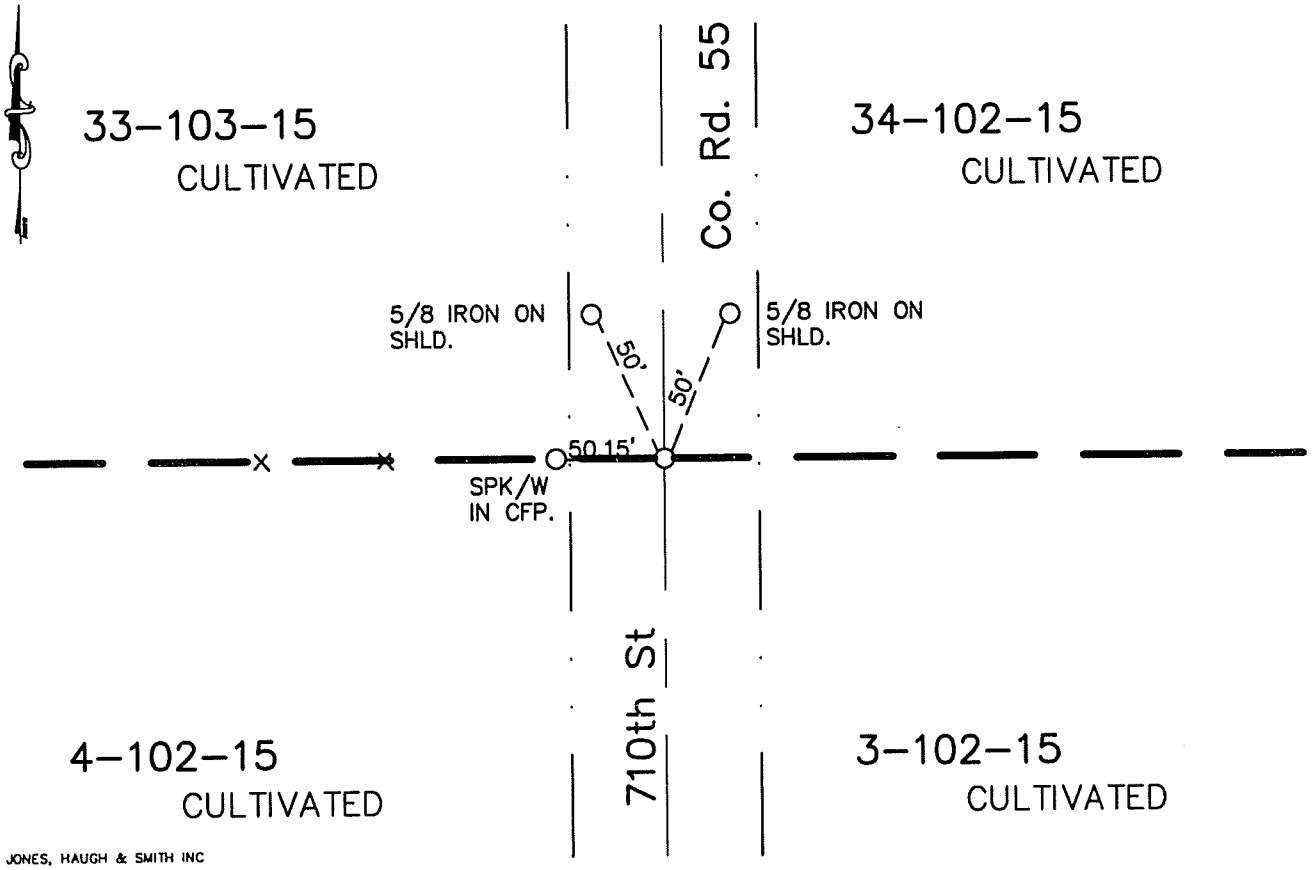

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-8-02

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

NE Cor Sec 4-102-15

Deputy Surveyor John Quigley of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

1958 Mower County records show concrete monument inplace and a 3/4" iron 50' East of the monument.

2002 Jones Haugh and Smith crew, under the direction of John Schulte, Mower County Surveyor RLS 13807, dug with backhoe at location of signal from magnetic locator. Uncovered concrete monument with pin in the center. Placed a capped 13807 5/8" iron on North side of monument 1.3' deep. Set 5/8" iron with cast iron monument .6' below road surface, over the found monument. Took new ties. The crew was unable to locate ¾" iron 50' East of concrete monument.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.