Index No. P20 "P"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 20, Township 102N, Range 17 W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 7-13-87 (DATE) found a 5/8" ø iron.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 7-13-87 (DATE) placed a cast iron monument on road surface over iron found.

SKETCH OF REFERENCE TIES

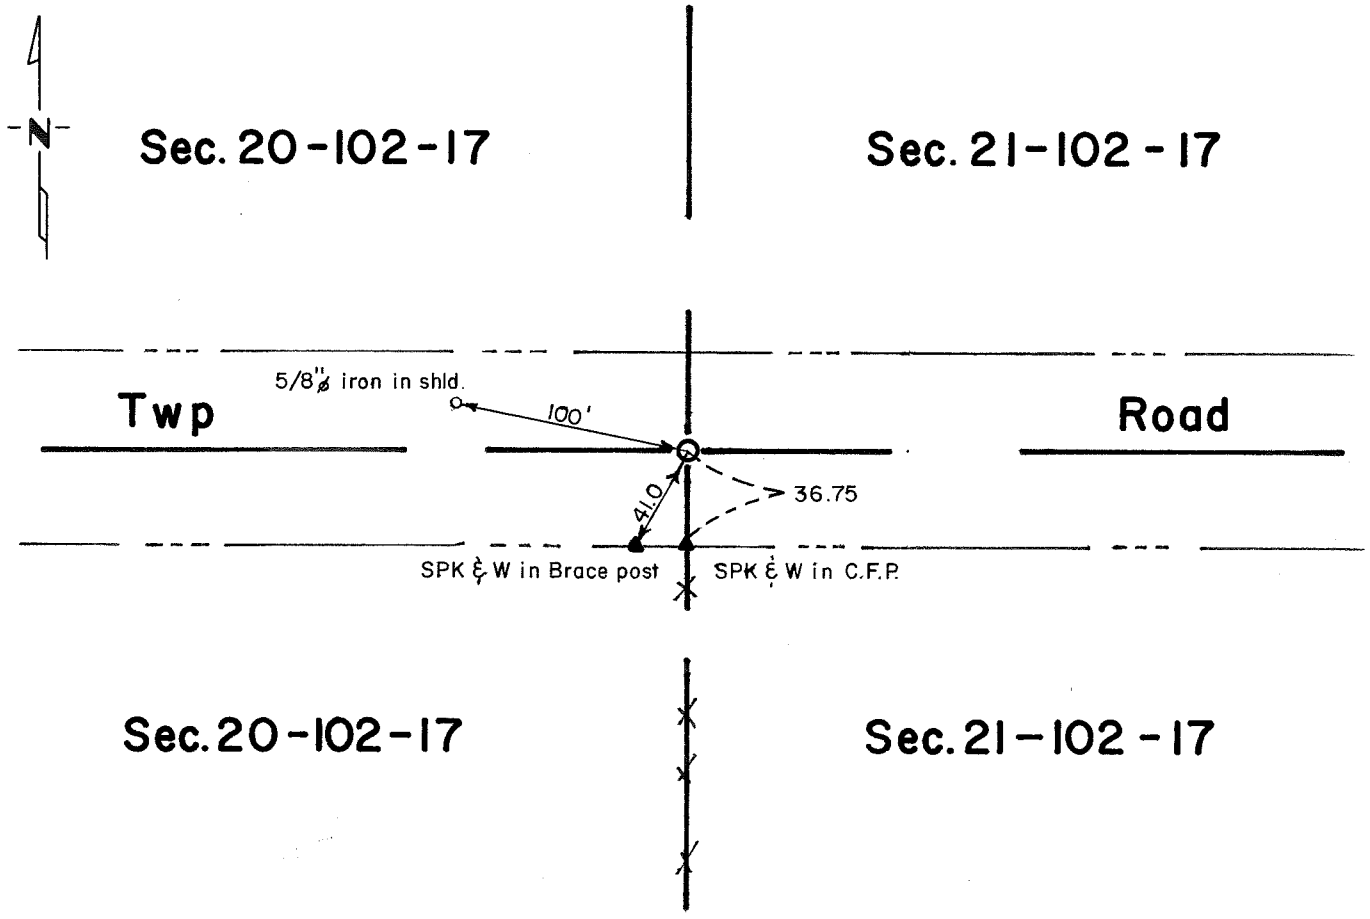

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 12-12-88 DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE
$E\frac{1}{4}$ corner Section 20-102-17

This corner was originally established by Deputy Surveyor, William I. Anderson of the US General Land Office in 1854. The government notes show this corner was marked with a wood post and the following bearing trees were marked:

14" Burr Oak N 18° W 60 Links

The following were contacted for section corner information:

Mower County Engineering Department

No record of the corner was obtained from Mower County Engineering Department or private records of Jones, Haugh & Smith Inc.

1987 Jones, Haugh & Smith crew dug with the Mower County backhoe on centerline of east-west road in line with fence south and uncovered a 5/8" diameter iron one foot below road surface. Continued digging and found no further evidence of public land survey corner. Reset 5/8" diameter iron and set cast iron monument over it on road surface.

The monument found fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact firm of Jones, Haugh & Smith