Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 32, Township 102N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 10/15/1991 (DATE) found a 1"ø x 16" IRON

☐ left monument as found, ☐ lowered monument, ☒ removed monument (explain)

☒ On 10/15/1991 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

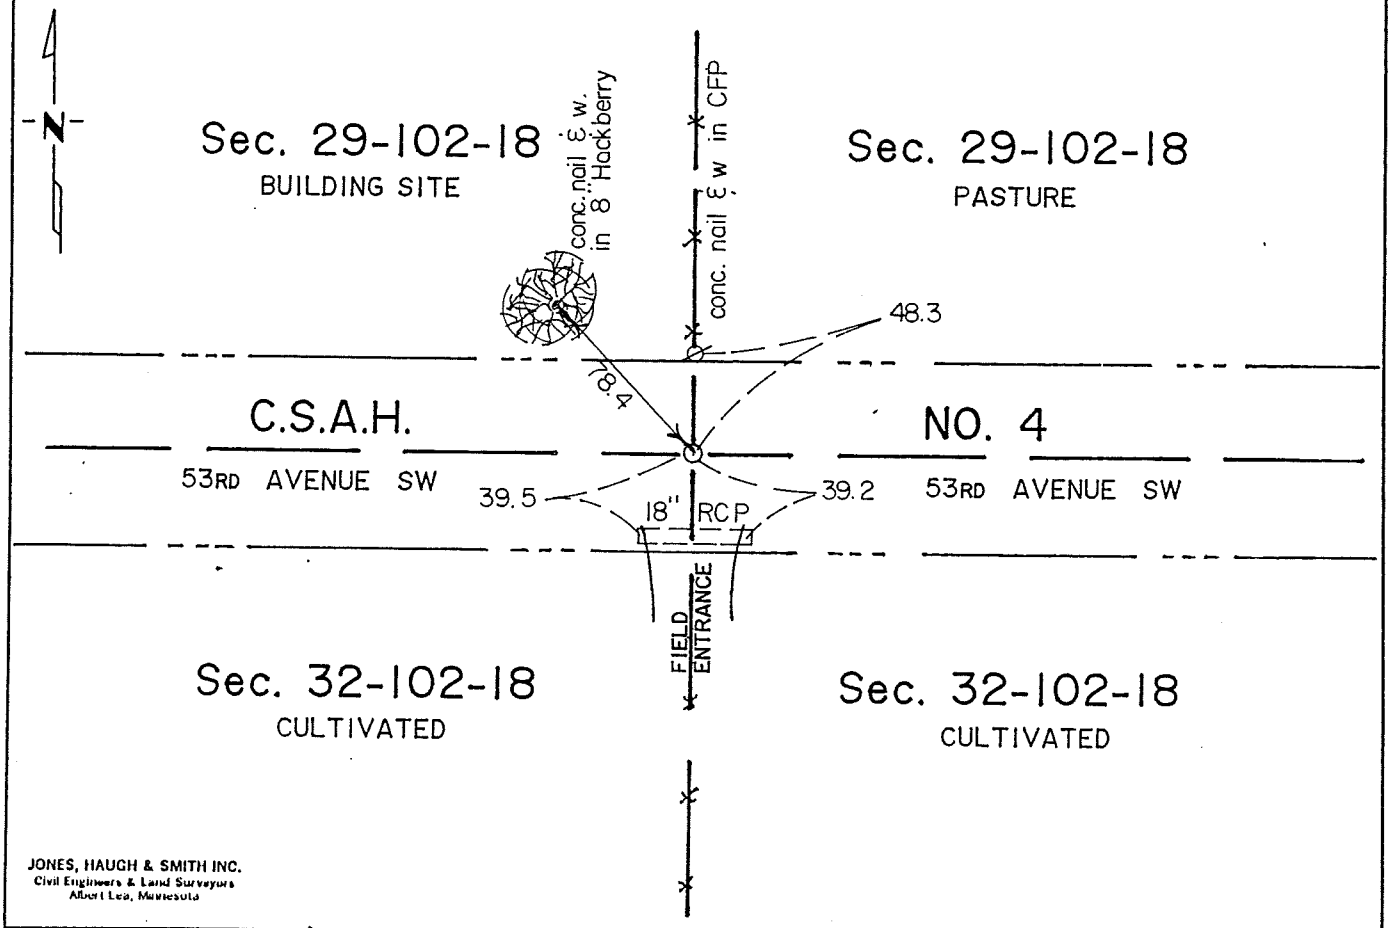


JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-16-92

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Sec 32-102-18

This corner was originally established by Deputy Surveyor Wm. I Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of a perpetuation of the original public land survey corner.

1991 Jones, Haugh & Smith Inc crew under the direction of John Schulte IV, dug with the County backhoe on centerline of east-west road in line with fence north-south and uncovered a 1" diameter x 16" long iron one foot below road surface. Continued digging to a depth of 5 feet deep and found no further evidence of public land survey corner or a perpetuation thereof. Accepted 1" diameter iron as best evidence and set cast iron monument at same location.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.