CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 31, Township 103, Range 14W, 5 P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

On 7-29-91 found A WOOD POST ON WEST SIDE OF 3' BOULDER 2.8' BELOW THE SURFACE.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

On 7-29-91 placed A 3/4" REBAR AND COUNTY CAP OVER THE POST.

SKETCH OF REFERENCE TIES

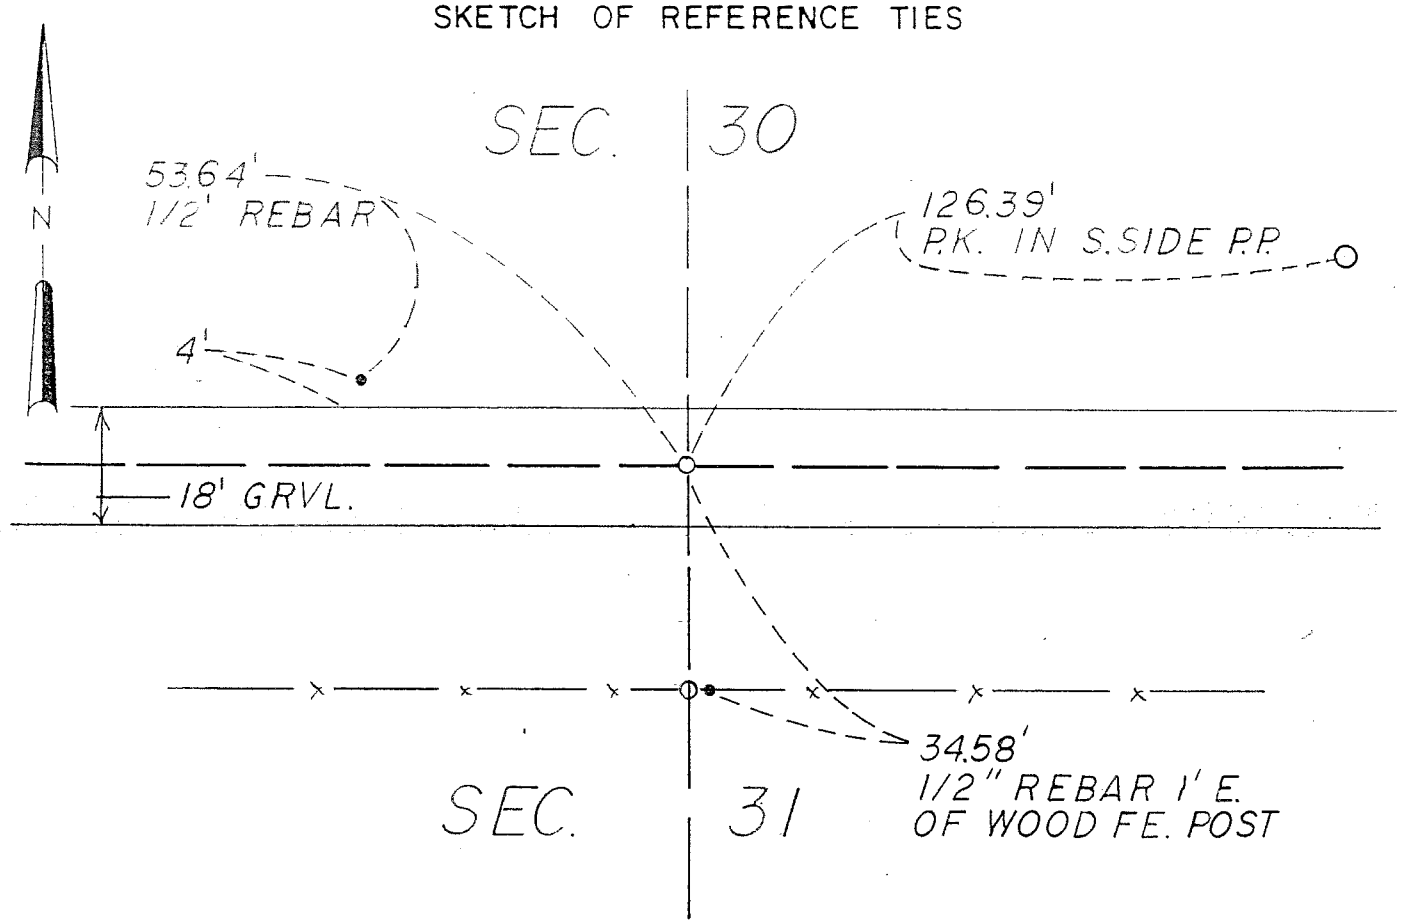

Statement of evidence relative to this corner location is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald J. Olson — Signature
12-31-91 — Date

Registration No. 11009

☒ Land Surveyor ☐ Prof. Engineer
☐ County Surveyor ☐ County Engineer

Zenk•Read•Trygstad & ASSOCIATES, INC.
Engineers/Architects/Land Surveyors/Planners
Box 689, Albert Lea, MN 56007 507/373-0689

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____ .M. on the ____ day of _____ A. D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

NORTH QUARTER CORNER SECTION 31, TOWNSHIP 103 NORTH, RANGE 14 WEST, 5 PM

September, 1853	John Ball, Deputy Surveyor, set quarter section post and deposited a handful of charcoal and raised a mound of earth and sod. Cut a trench and planted Osage Orange seeds north and south between pits and trench during the original Public Land Survey.
July 29, 1991	A Zenk Read Trygstad & Associates, Inc. survey crew excavated with a backhoe a trench 3 feet north and 4 feet south of centerline by 5 feet east and 4 feet west of the occupation line south by 3.5 feet deep and found a wood fence post on the east side of a 3 foot diameter boulder. A hole was also excavated at the Lost location and nothing was found.
	An analysis of the record data gives no indication of origin of the boulder or wood post. The existing occupation lines agree with the location of the post. The post is about 13 feet east of the lost position. Since the post with boulder is evidence of long standing use as the corner before the construction of the Township Road, it is accepted as the location of the original Public Land Survey Corner.