CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

plot "E"

NORTH QUARTER Corner of Section 35, Township 103N, Range 16W, 5 P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

On 4-13-89 found A 12" E-W BY 12" N-S BY 7" HIGH STONE DOWN 1.3'

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

On 4-13-89 placed A CTY. MON. ON A 24" X 3/4" REBAR IN PLACE OF STONE

SKETCH OF REFERENCE TIES

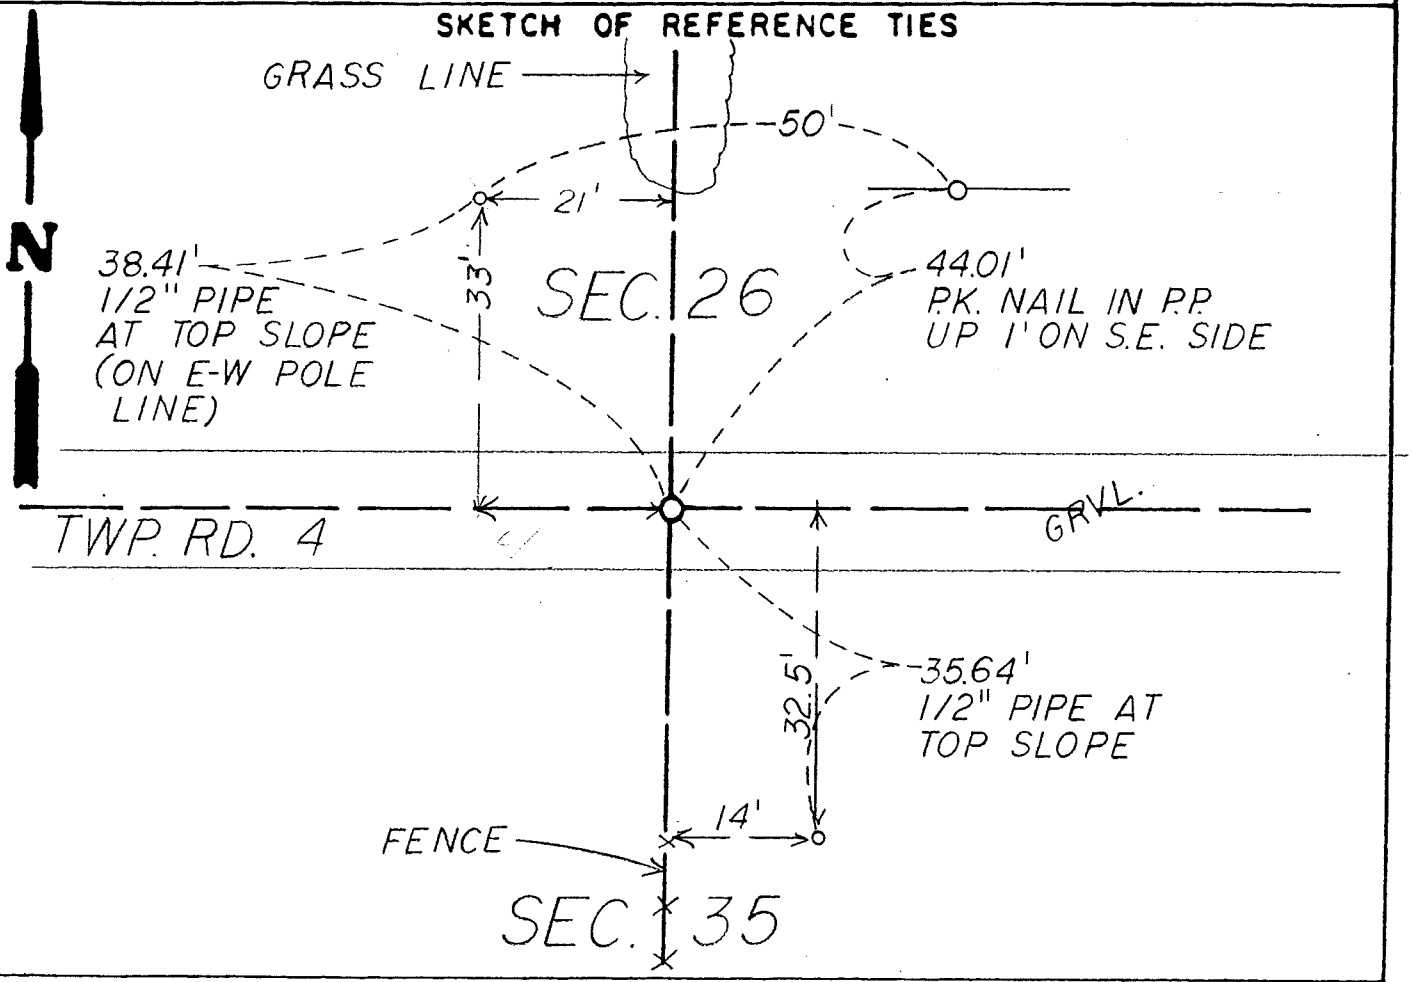

Statement of evidence relative to this corner location is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald J. Olson — Signature
7-25-89 — Date

Registration No. 11009

☒ Land Surveyor ☐ Prof Engineer
☐ County Surveyor ☐ County Engineer

Zenk•Read•Trygstad & ASSOCIATES, INC.
Engineers / Architects / Land Surveyors / Planners
Box 689, Albert Lea, MN 56007 507/373-0689

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____.M. on the ____ day of _____ A.D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

NORTH QUARTER CORNER SECTION 35 TOWNSHIP 103 NORTH RANGE 16 WEST 5TH P.M.

July, 1853 — John Quigley, Deputy Surveyor, set post for corner and built mound with trench per instructions and deposited hand full of small stones. He planted Osage Orange Seeds in SE corner during the original Public Land Survey.

April 13, 1989 — Ronald J. Olson, RLS 11009, excavated with a backhoe 3 feet East to 3 feet West of the fence line South by 2 feet North to 2 feet South of the road centerline by 4.5 feet deep and found a 12" E-W by 12" N-S by 7" high stone 1.3 feet below the surface near natural ground. An old VCP tile was found below the stone and 3 feet east of it. The stone was removed during excavation.

An analysis of the record data gives no indication of the origin of the stone. It was found near natural ground and agrees with the lines of occupation. It is accepted as marking the location of the original Public Land Survey Corner.