Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 11, Township 103N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 11/09/2000 (DATE) found a CAPPED 5/8 IRON OVER POURED CONC. MONUMENT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 11/09/2000 (DATE) placed a CIM

SKETCH OF REFERENCE TIES

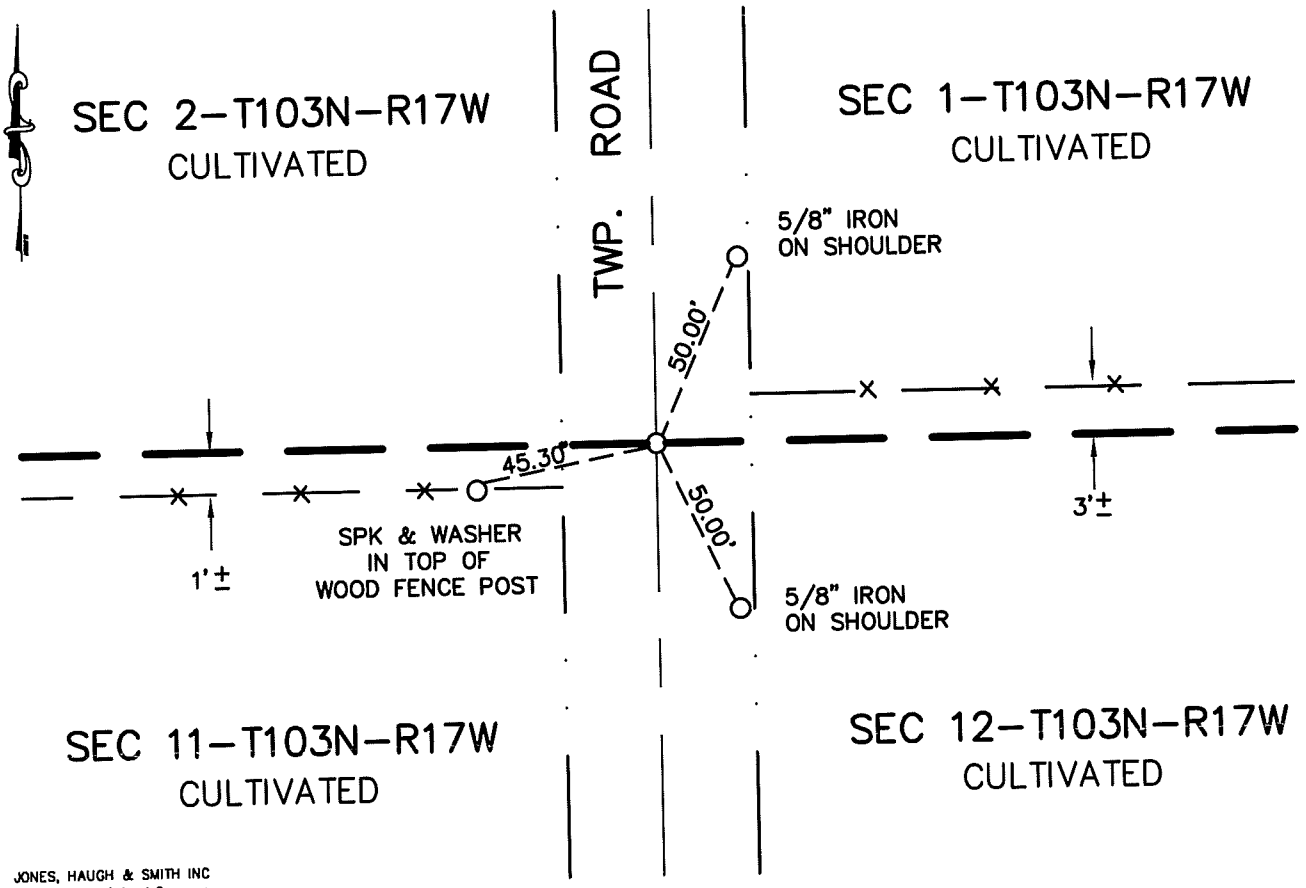

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 11-14-00

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

NE Cor Sec 11-103-17

Deputy Surveyor William I. Anderson of the U.S. General Land Office originally established this corner in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

1892 Clausen's field notes show 40.01 chains on west line of Northwest ¼.

1978 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, surveyed NE ¼ NW ¼ Sec. 12 and used intersection of centerline and fence line running East.

2000 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with Mower County backhoe, at the intersection of centerline of Twp. Road and fence line running east. Uncovered a poured concrete monument dated 1956, and a 5/8" iron capped 13807 over monument. Placed 5/8"x24" iron with Cast Iron Monument over concrete monument found. Took new ties.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.