Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 16, Township 103N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 9-11-90 (DATE) found a 5/8"Ø x 24" iron 8.0' South of ℄ E-W road.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 9-11-90 (DATE) placed a cast iron monument over 5/8"Ø iron in line with fence N-S and 8.0' South of ℄ E-W roads.

SKETCH OF REFERENCE TIES

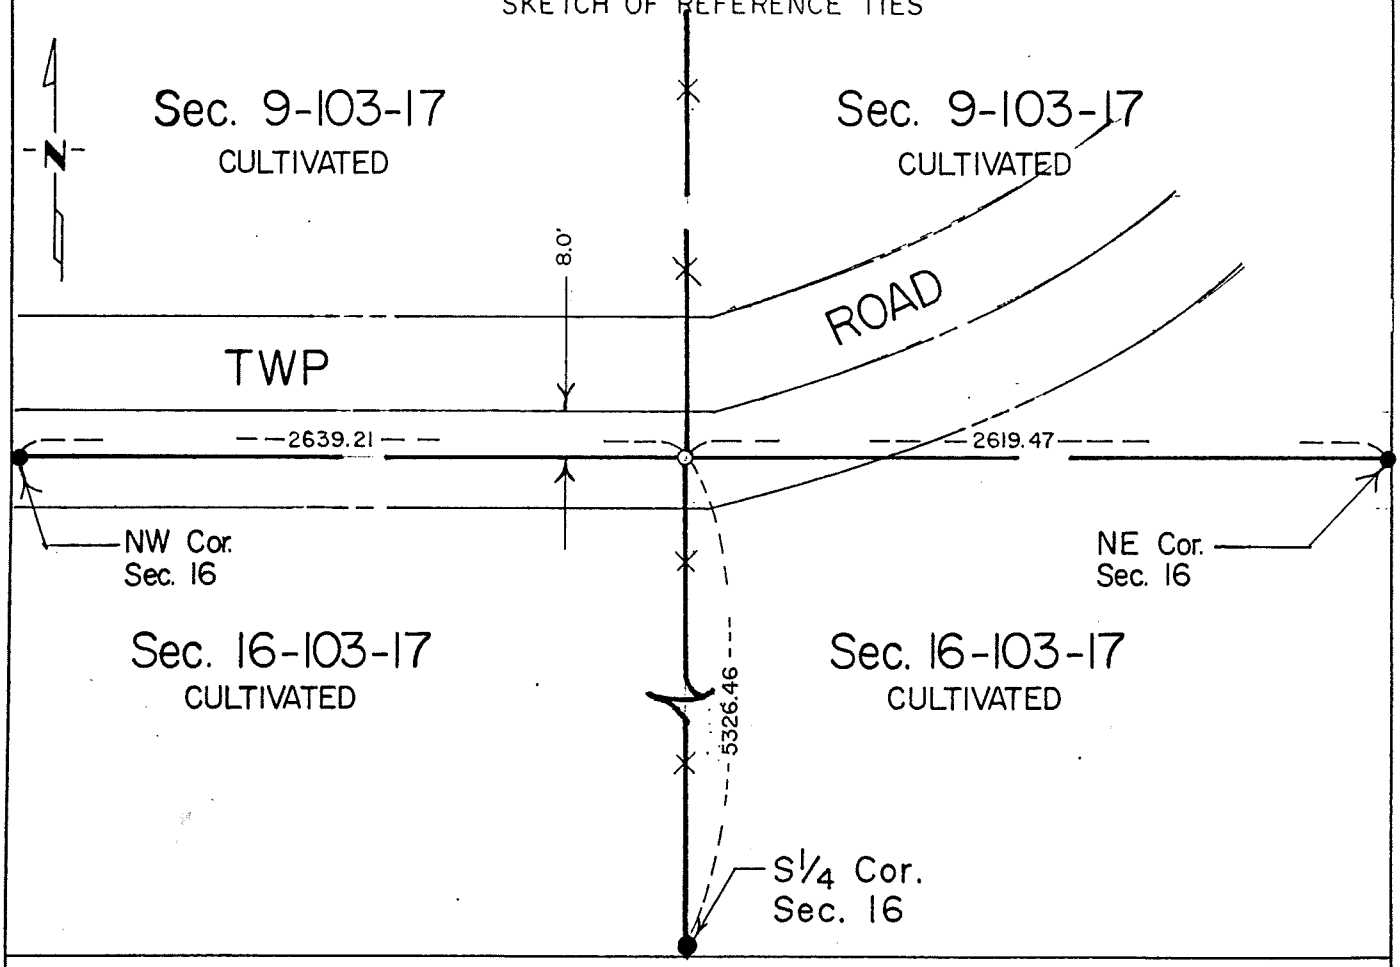

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-12-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Sec 16-103-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Survey Office in 1854. The government notes show this corner was marked with a post and ties were taken:

16" Burr Oak	S 9° W	60 links (39.6 feet)
14" Burr Oak	N 616° E	5 links (3.30 feet)

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorders Office

1970 Jones & Haugh crew dug with backhoe and found no evidence of public land survey corner. Set a 5/8" diameter iron in line with a fence north and south and in line with centerline of township road to west. Corner is 8.0 feet south of centerline of east-west road.

1990 Jones, Haugh & Smith crew found a 5/8" diameter x 24" iron 8.0' south of centerline east-west road in line with fences north-south. Placed a cast iron monument over 5/8" diameter iron at location of monument found.

Corner found fits occupation lines and is accepted as best evidence of a perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.