Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 26, Township 104N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER

At the corner location shown on the sketch


☐ On 09/06/2000 (DATE) found a 3' STEEL FENCE POST WITH WOOD REMAINS BELOW PLACED 5/8" IRON WITH C.I.M OVER FENCE POST, 0.4' BELOW ROAD SURFACE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

_____

SKETCH OF REFERENCE TIES

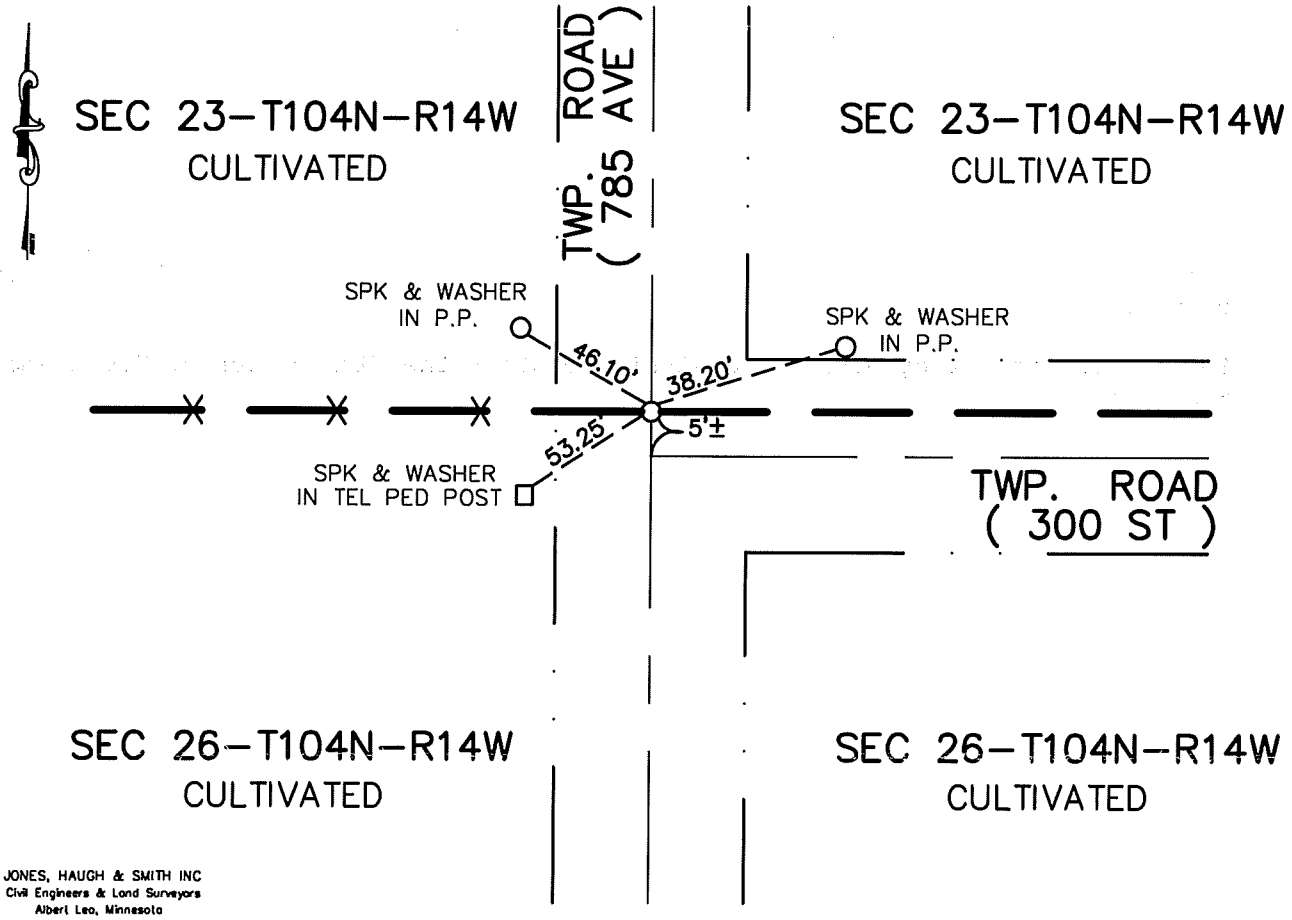

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ 9-21-00
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

N 1/4 Cor Sec 26-104-14

Deputy Surveyor John Taylor of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

2000 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with Mower County backhoe, at the location of signal from locator. Uncovered a 3'steel fence post with wood remains at bottom of post. Accepted fence post as true perpetuation of original corner. Placed a capped 5/8" iron on East side of post. Set a 5/8"x16" iron with C.I.M over fence post, 0.40' below road surface. Took new ties.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.