Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 28, Township 104N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 11/18/1999 (DATE) found a WITH METAL LOCATOR, FOUND A 1/2" X 24" PIPE, 0.5' DOWN

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

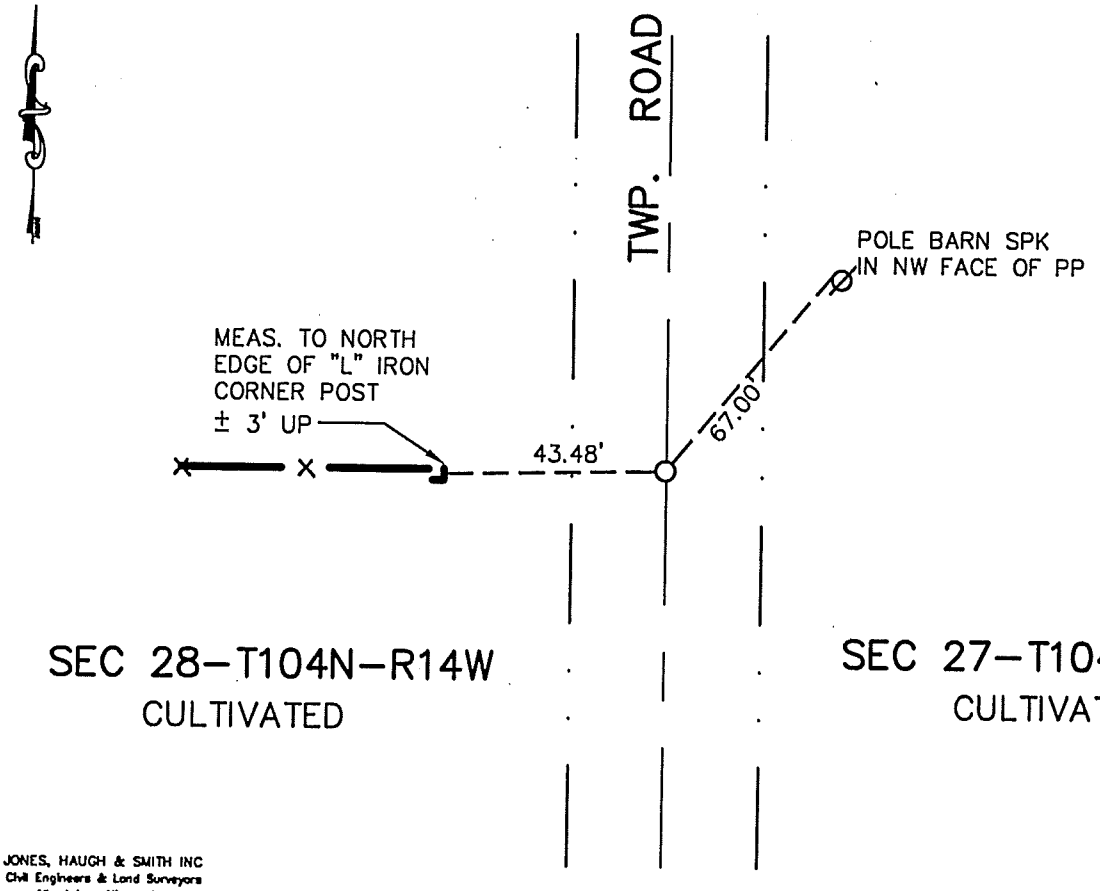


JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 12-10-99 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

E 1/4 Cor Sec 28-104-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1999 Corner location by Jerome Schwarz, RLS #13810
With metal locator, found a 1/2" x 24" iron pipe down 0.5'. Tied off the pipe, then dug a hole with a backhoe, 8'x8'x3.5' deep through the 2nd roadbed, into undisturbed soil. Found nothing.
Using ties, reset pipe in its original found location, and accepted it as perpetuation of PLS corner.

Corner falls on line with fence to the west, and 0.8' +/- east of centerline of Twp. Road.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.