Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 22, Township 104 Range 15, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/03/1994 (DATE) found a POINTED STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 05/03/1994 (DATE) placed a CIM

SKETCH OF REFERENCE TIES

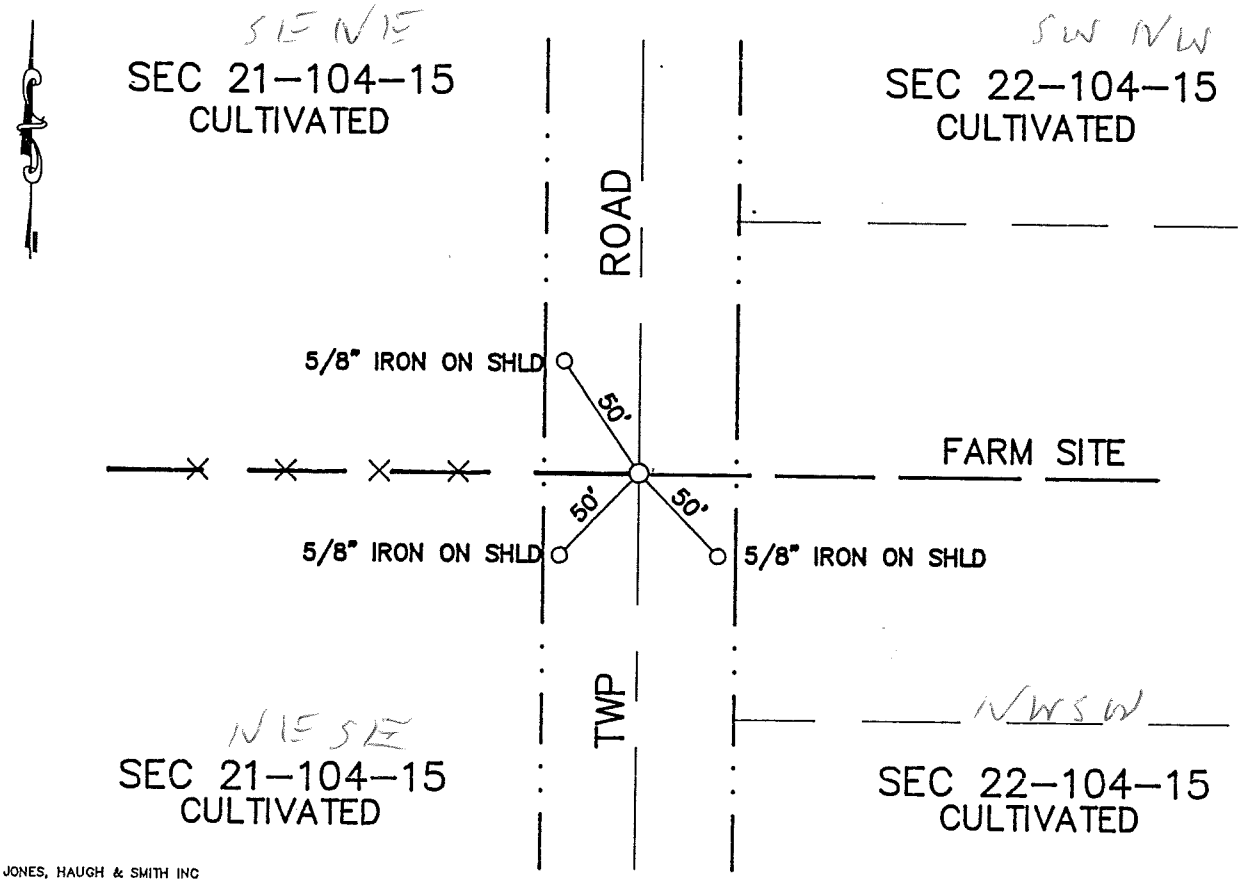

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 1-30-96 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 p .M. on the 2 day of Feb A.D., 1996

COUNTY RECORDER Charles Engen
By Susan M. Davis, Deputy
DOCUMENT NO. 142314

M.H.D. FORM NO. 2105 BOOK 90 PAGE 162

Book 90 Misc Page 162

W 1/4 Cor SEC 22-104-15

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1930 Mower County Highway Department notes show a small pointed stone with a 5/8" iron rod above in place.

1994 Jones, Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of township road and in line with line fence West. Uncovered a 5/8"x20" long iron, 1' below the road surface. Continued digging and found a pointed stone. Placed a 5/8" iron with an Aluminum casting over stone 4" below the road surface.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.