Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 25, Township T104N, Range R15W, ____ P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 8-16-94 (DATE) found a 2' LONG IRON 1.5' BELOW ROAD SURFACE, IN OLD ROAD BED.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 8-16-94 (DATE) placed a 5/8"ø IRON WITH CAST IRON MON. OVER IRON FOUND, 4" BELOW ROAD SURFACE.

SKETCH OF REFERENCE TIES

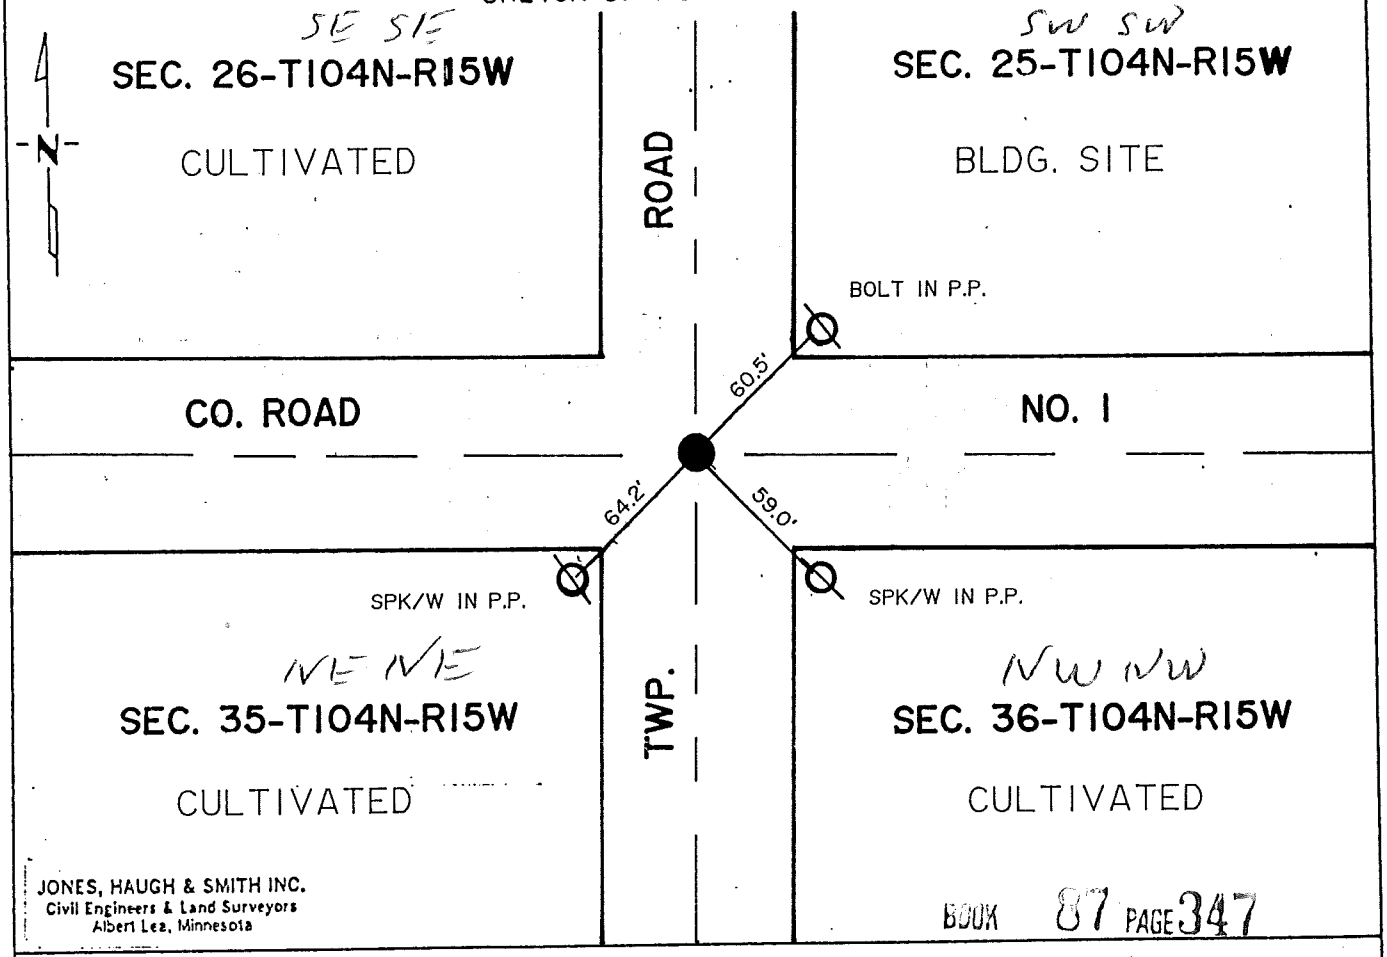

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 87 PAGE 347

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-12-95

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A .M. on the 19 day of June A.D., 1995

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 437351

Book 87 Misc. Page 347

M.H.D. FORM NO. 2105

SW Cor SEC 25-104-15

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1941 Mower Co. Hwy. Dept. records indicate a monument in place.

1994 Jones, Haugh and Smith crew dug with county backhoe on CL CL of CSAH #1 and Twp. road. Found a 2' long iron 1.5' below road surface, in old road bed. Continued digging to virgin soil and found no further evidence. Accepted iron as true corner. Placed a CIM over the iron found, 4" below the road surface.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.