Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 3, Township 104N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 06/04/1997 (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 06/04/1997 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

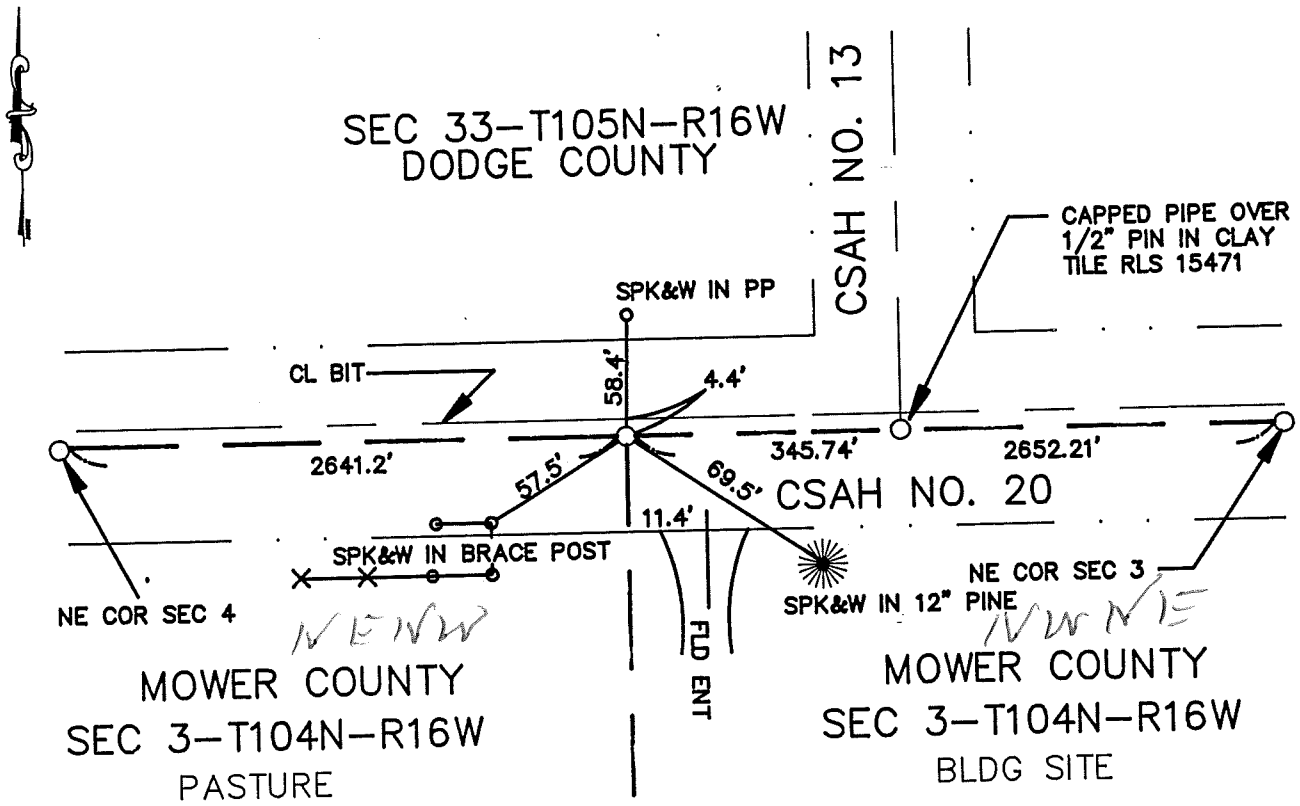


JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page. BOOK 96 PAGE 114

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 8-4-97 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 6 day of Aug A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M Davis, Deputy

DOCUMENT NO. 455221

M.H.D. FORM NO. 2105

Book 96 Misc Page 114

N 1/4 Cor SEC 3-T104N-R16W

This corner was originally established by Deputy Surveyor Elisha S. Norris of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Tucker Land Surveying

1984 R.J. Tucker excavated for this corner during regrading project for CSAH No. 20. He found no evidence of this corner.

1997 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, set corner on a straight line between NW corner section 5-T104N-R16W and SW corner section 34-T105N-R16W in line with fence line south. A distance of 345.74' west of SW corner of said section 34 was measured, vs. PLS measurement of 343.20' west of SW corner section 34.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.