Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 4, Township 104N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 1984 (DATE) found a NO EVIDENCE OF CORNER

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 06/04/1997 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

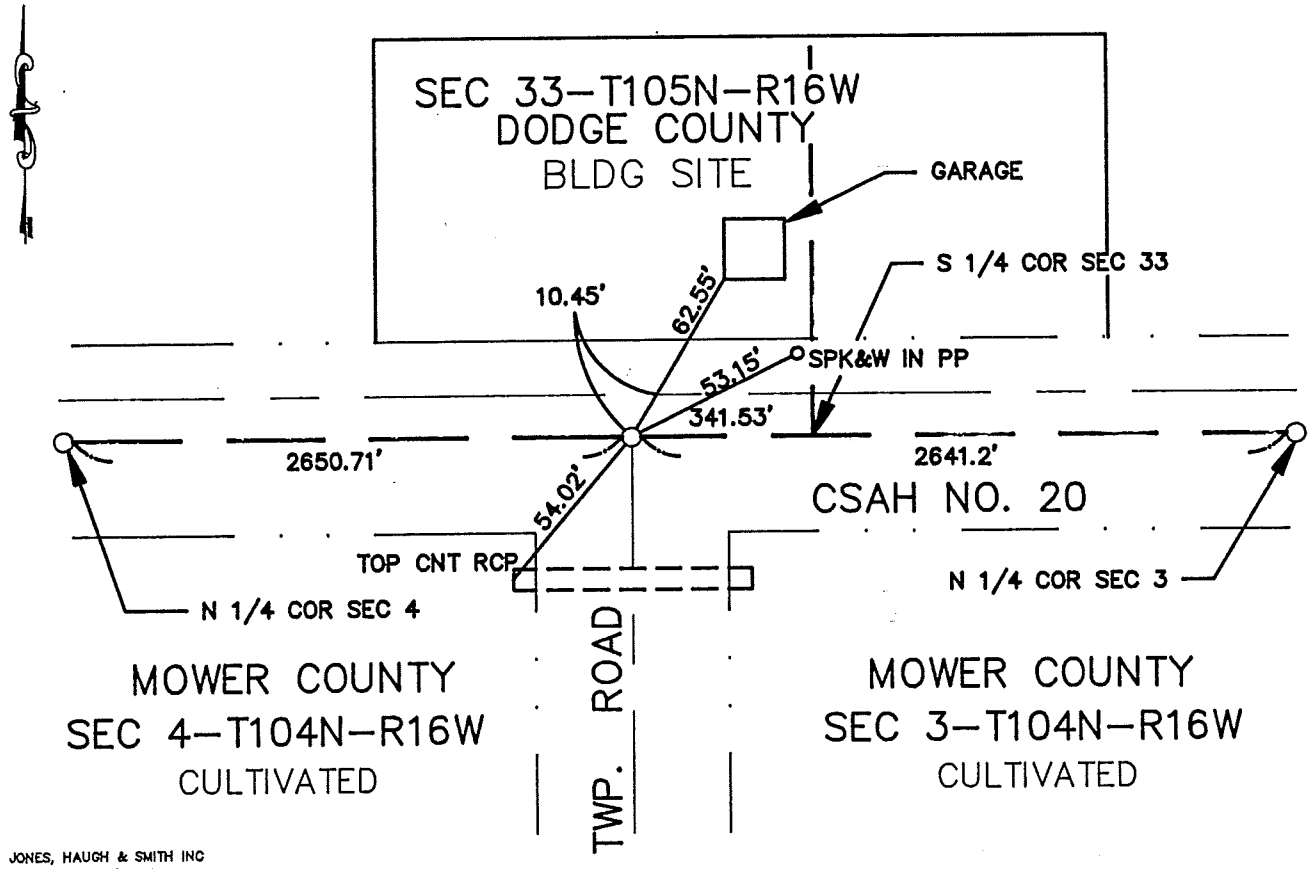

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-20-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 10 a .M. on the 23 day of June A.D., 1997

COUNTY RECORDER _____

By _____ Deputy

DOCUMENT NO. 454026

M.H.D. FORM NO. 2105

BOOK 95 PAGE 375

NE Cor SEC 4-104-16

This corner was originally established by Deputy Surveyor Elisha S. Norris of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Tucker Land Surveying

1984 R.J. Tucker RLS #15471 excavated for this corner with a Mower County backhoe and found no evidence of the original PLS corner.

1997 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, set corner on a straight line between the NW corner of section 5-104-16 and the SW corner of section 34-104-16 in line with CL of township road south. A distance of 341.53' west of the S 1/4 corner of section 33-105-16, vs. original PLS distance of 343.20' west of S 1/4 corner of section 33.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.