Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 6, Township 104N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 06/04/1997 (DATE) found a 5/8" IRON

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 06/04/1997 (DATE) placed a –

SKETCH OF REFERENCE TIES

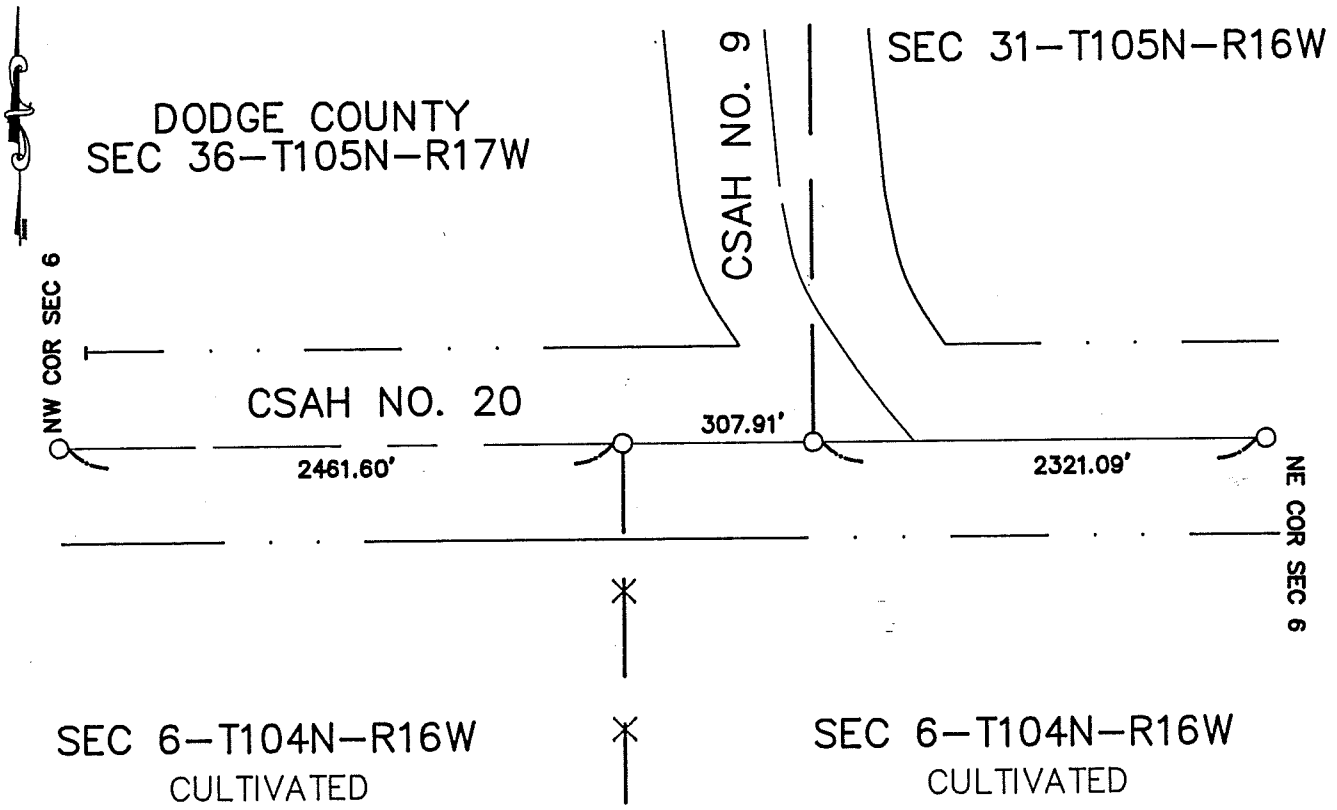

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-20-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 12 a.M. on the 23 day of June A.D., 19 97

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. 454028

M.H.D. FORM NO. 2105

BOOK 95 PAGE 219

N 1/4 Cor SEC 6-104-16

This corner was originally established by Deputy Surveyor Elisha S. Norris of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1986 Jones Haugh and Smith crew found that the N 1/4 corner of section 6 had been destroyed by road construction for Mower County CSAH No. 20 and Dodge County CSAH No. 9, therefore a 5/8" iron capped RLS #13807 was set on a straight line between the NE corner of section 6 and the NW corner of section 6 in line with line fence to the south.

1997 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, located a 5/8" iron in accordance with 1986 surveys.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.